

# The Peak to Average Power Reduction (PAPR) Technique of OFDM Signal by using Clipping and Filtering Method

Md. Kislu Noman<sup>1</sup> and S. M. Yahea Mahbub<sup>2</sup>

<sup>1</sup> Pabna University of Science and Technology

*Received: 15 December 2013 Accepted: 2 January 2014 Published: 15 January 2014*

## Abstract

Orthogonal Frequency Division Multiplexing (OFDM) has several attributes which make it a preferred modulation scheme for high speed wireless communication. Orthogonal Frequency Division Multiplexing (OFDM) has been currently under intense research for broadband wireless transmission due to its robustness against multipath fading. However OFDM signals have a problem with high Peak-to-Average power ratio (PAPR) and thus, a power amplifier must be carefully manufactured to have a linear input-output characteristic or to have a large input power back-off. In recent years, many peak-to-average power ratio (PAPR) reduction techniques have been proposed for orthogonal frequency division multiplexing (OFDM) signals. Among various techniques, the clipping and filtering technique has been considered as a practical scheme, and widely used owing to its non-expansion of bandwidth, low computational complexity, and simplicity in implementation without receiverside cooperation.

**Index terms**— CCDF, CDF, CDMA, DAB, DVB, FFT, IFFT, ISI, LAN, MCM, OFDM, PAPR.

## 1 Introduction

Orthogonal frequency division multiplexing (OFDM) is becoming the chosen modulation technique for wireless communications. Orthogonal Frequency Division Multiplexing (OFDM) can be termed as an alternative wireless modulation technology to CDMA. OFDM (Orthogonal Frequency Division Multiplexing) is a multicarrier modulation that is implemented in many recent wireless applications due to its ability to combat impulsive noise and multipath effects and make better use of the system available bandwidth. It has been adopted for the European Digital Audio Broadcasting (DAB) [1] and Digital Video Terrestrial Broadcasting (DVB) standards, it has been proposed for UMTS (Universal Mobile Telecommunication Systems) [2] and it has just been standardized for new wireless LAN generations O S.M. Yahea Mahbub ? , Purno Mohan Ghosh ? , Iffat Ara ? & Md. Kislu Noman ? frequency selective fading and high power efficiency. Due to these merits OFDM is chosen as high data rate communication systems such as Digital Video Broadcasting (DVB) and based mobile worldwide interoperability for microwave access (mobile Wi-MAX) [3]. The basic principle of OFDM is to split a highrate data stream into a number of lower rate streams that are transmitted simultaneously over a number of subcarriers. These subcarriers are overlapped with each other. Because the symbol duration increases for lower rate parallel subcarriers, the relative amount of dispersion in time caused by multipath delay spread is decreased. Inter-symbol interference (ISI) is eliminated almost completely by introducing a guard time in every OFDM symbol [4]. The entire data stream of OFDM is divided into different blocks of N symbols each. Each block is multiplied with U different phase factors to generate U modified blocks before giving to IFFT block. Each modified block is given to different IFFT block to generate OFDM symbols. PAPR is calculated for each modified block and select the block which is having minimum PAPR ratio.

In this paper we have investigate OFDM signals, Clipping and Filtering method, OFDM signals with and without Clipping and Filtering method and compare between them.

## II.

### Ofdm System Model

OFDM is a special form of multicarrier modulation (MCM) with densely spaced subcarriers with overlapping spectra, thus allowing multiple-access [5]. MCM works on the principle of transmitting data by dividing the stream into several bit streams, each of which has a much lower bit rate and by using these substreams to modulate several carriers. In multicarrier transmission, bandwidth divided in many nonoverlapping subcarriers but not necessary that all subcarriers are orthogonal to each other [5]. In OFDM (HIPERLAN: High Performance Radio LAN. OFDM offer high spectral efficiency, immune to the multipath delay, low inter-symbol interference (ISI), immunity to and sent over the N sub-channels, one symbol per the sub-channels overlap each other which leads to an efficient use of the total bandwidth. The information channel. To permit dense packing and still ensure that a

The Peak to Average Power Reduction (PAPR) Technique of OFDM Signal by using Clipping and Filtering Method carefully. By using orthogonal carriers, frequency domain can be viewed so as the frequency space between two sub-carriers is given by the distance to the first spectral null [6]. By converting a single high frequency carrier to several sub-carriers, OFDM enhances the ability to cope with frequency selective fading effects and narrow bandwidth interference. The orthogonal property also greatly simplifies the design of both transmitter and receiver. A receiver can detect every sub-carrier data, which commonly is done via Fast Fourier Transform (FFT). Therefore a separate filter for each sub channel is not required. However, in practice, the sub-carriers are modulated in different amplitude and phase [7]. a) Peak to Average Power Ratio(PAPR) for OFDM signal

The peak to average power ratio for a signal  $x(t)$  is defined as  $PAPR = \frac{\max |x(t)|^2}{E |x(t)|^2}$

The mean square value of the signal is  $E |x(t)|^2 = \frac{1}{T} \int_0^T |x(t)|^2 dt = 1$  (5)

Given so, the PAPR of a single complex sinusoidal tone is,  $PAPR=1$ [8]. In this paper, hard-limiting is applied to the amplitude of the complex values at the IFFT output. However, any other form of nonlinearity could be used. The clipping ratio, CR, is defined as the ratio of the clipping level value to the root mean square value of the unclipped signal. The clipping is followed by filtering to reduce out-of band power. The filter consists of two FFT operations. The forward FFT transforms the clipped signal back into the discrete frequency domain resulting in vector. The in-band discrete frequency components of,  $[C_{0,i}, \dots, C_{N/2-1,i}, C_{N/2,i}, \dots, C_{N/2+1,i}, \dots, C_{N-1,i}]$ , are passed unchanged to the inputs of the second IFFT while the out-of-band components,  $[C_{N/2+1,i}, \dots, C_{N-1,i}]$  are nulled. In systems where some band-edge subcarriers are unused the components corresponding to these are also nulled. The resulting filter is a time-dependent filter, which passes in-band and rejects out-of-band discrete frequency components. This means that it causes no distortion to the in-band OFDM signal. Since the filter operates on a symbol-by-symbol basis, it causes no Inter-symbol interference. The filtering does cause some peak to re-growth. Clipping method sets a clipping threshold, when the amplitude of the signals over the threshold, then cut the high peak power. According to the system acquirement, the following function has been used to calculate the clipping ratio.  $PAPR_0 = 10 \log CR$ , where,  $PAPR_0$  is the threshold value, and CR is the clipping ratio. Due to the relation between  $PAPR_0$  and the system BER,  $PAPR_0$  is selected to be inverse ratio to BER. In this case, proper threshold value should be selected carefully.

## III.

### Simulation and Results

The Cumulative Distribution Function (CDF) is one of the most regularly used parameters, which is used to measure the efficiency of any PAPR technique. Normally, the Complementary CDF (CCDF) is used instead of CDF, which helps us to measure the probability that the PAPR of a certain data block exceeds the given threshold. The CCDF of the PAPR of the data block is desired in our case to compare outputs of various reduction techniques [7] [8].

The simulation result of amplitude clipping method is shown in Fig- 4. It can be observe that OFDM signal is has higher PAPR and after applying this method PAPR is reduced significantly. This PAPR is decreases as the number of clip and filtering is increased from one to two levels. Because the clipping is followed by filtering to reduce out of band power.

## Conclusion

In conclusion, OFDM technology summed up a number of sub carriers modulated by group of data symbol. Therefore, transmitted signal may have a relatively large peak power which leads to high PAPR. The principal drawback of OFDM is that the peak transmitted power can be substantially larger than the average power. We observe that the PAR-reduction problem for OFDM has received a great deal of attention recently. In this paper, It can be observe that OFDM signal is has higher PAPR and after applying this method PAPR is reduced significantly. This PAPR is decreases as the number of clip and filtering is increased from one to two levels.



Figure 1: Fig 1 :

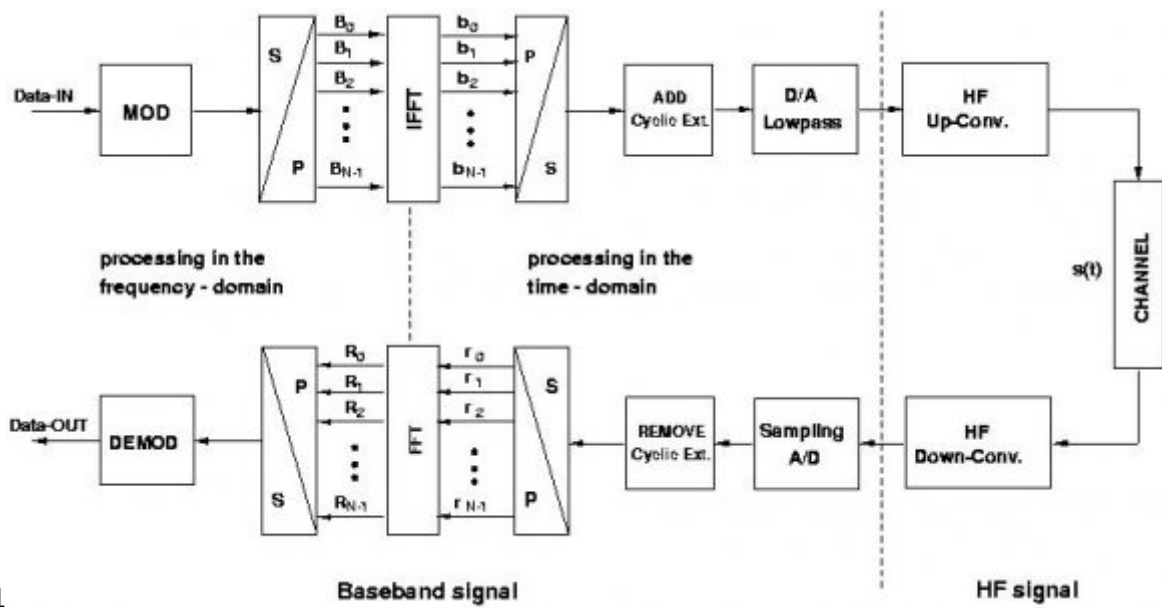


Figure 2: ( 1 )

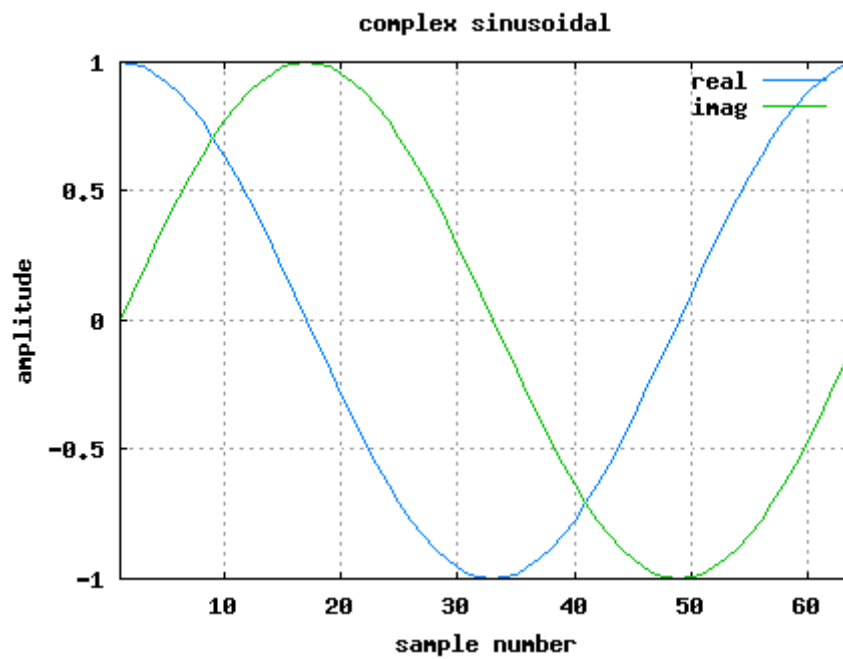


Figure 3: Fig 2 :

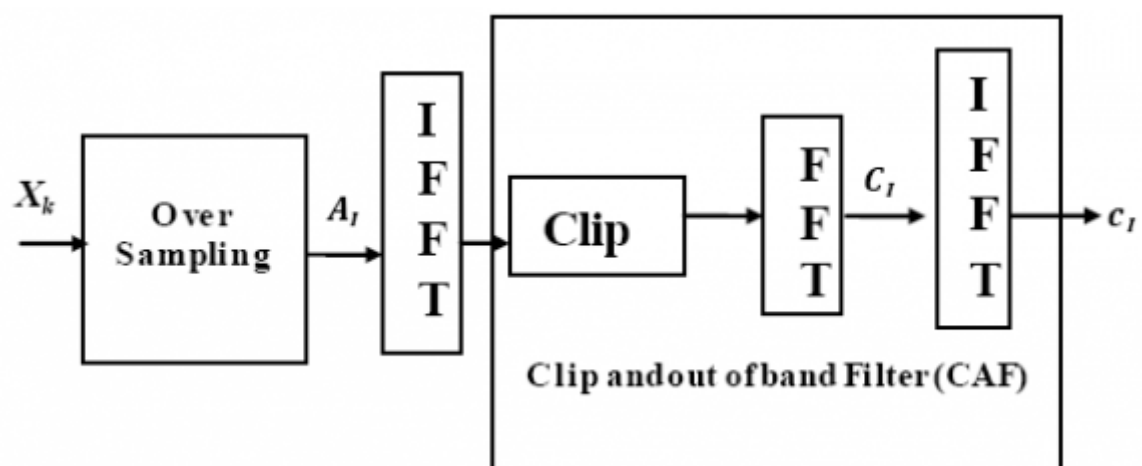


Figure 4: Fig 3 :

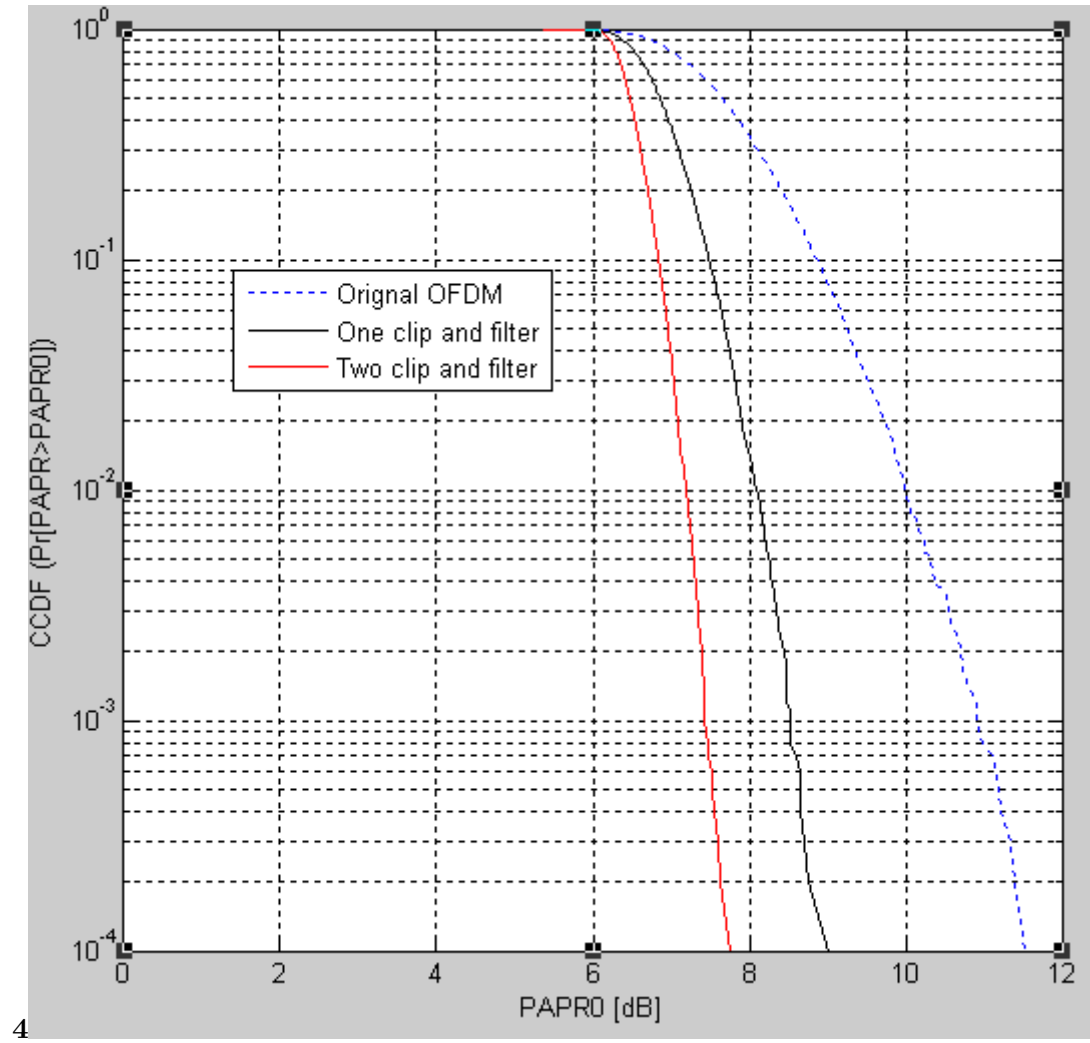


Figure 5: Fig 4 :

## 6 CONCLUSION

---

99 Because the clipping is followed by filtering to reduce out of band power. The DFT transform the clipped signal  
100 into frequency domain signal. <sup>1 2 3</sup>

---

<sup>1</sup>The Peak to Average Power Reduction (PAPR) Technique of OFDM Singnal by using Clipping and Filtering Method

<sup>2</sup>© 2014 Global Journals Inc. (US)

<sup>3</sup>Year 2014 © 2014 Global Journals Inc. (US)

.1 Global Journals Inc. (US) Guidelines Handbook 2014

www.GlobalJournals.org

[IEEE Trans. Consumer Electronics (1989)] , *IEEE Trans. Consumer Electronics* Aug. 1989. 35 (3) p. .

[Leung et al. (2002)] ‘Algorithm for repeated clipping and filtering in peak-to-average power reduction for OFDM’. S Leung , S Ju , G Bi . *Electron. Lett* Dec. 2002. 38 (25) p. .

[Qing and Hongsheng ()] ‘An Improved Algorithm to Reduce PAPR Based Clipping and Filtering” Wireless Communications, Networking and Mobile Computing’. D Qing , Z Hongsheng . *WiCOM '08 International Conference*, 2008. p. .

[Floch et al.] B Le Floch , R H Lassalle , D Castelain . *Digital sound broadcasting to mobile receivers*,

[Muhammad Atif Gulzar et al.] Rashid Muhammad Atif Gulzar , Devendra Nawaz , Thapa . *Implementation of MIMO-OFDM System for WiMAX*, M.Sc Dissertation. (Department)

[Prasad ()] *OFDM for Wireless Communications Systems*, R Prasad . 2004. London, Boston: Artech House, Inc.

[Van De Beek (1997)] ‘On synchronization in an OFDM based UMTS proposal’. J Van De Beek . *Proc. COST 254 (Emergent Techniques for Communication Terminals)*, (COST 254 (Emergent Techniques for Communication TerminalsToulouse, France) July 1997.

[Lain et al.] *PAPR reduction of OFDM signals using PTS: a real-valued genetic approach*, Jenn-Kaie Lain , Yi Shi , Po-Hui Wu , Yang .

[Mathecken (2010)] *Performance Analysis of OFDM with Wiener Phase Noise and Frequency Selective Fading Channel*, P J Mathecken . December 29, 2010. Espoo. Department of Signal Processing and Acoustics, Aalto university

[Sengar and Bhattacharya (2012)] ‘Signal & Image Processing’. Suverna Sengar , Partha Pratim Bhattacharya . *PERFORMANCE IMPROVEMENT IN OFDM SYSTEM BY PAPR REDUCTION*, (Rajasthan; INDIA) April 2012. 3 p. 332311. Department of Electronics and Communication Engineering, Faculty of Engineering and Technology, Mody Institute of Technology & Science (Deemed University), Lakshmangarh, Dist -Sikar