

Solar Power Charge Controller

Tarang Thakur¹

¹ Maharaja Agrasen Institute of Technology

Received: 15 December 2015 Accepted: 4 January 2016 Published: 15 January 2016

Abstract

The demand of renewable energy (alternative energy sources) is increasing day by day as our non renewable sources have started depleting. The other reason for increased demand is that it has a cleaner, easy setup and has a very low cost of maintenance during its operation. Due to which, solar powered equipments and appliances are making its way into various sectors of our day to day life. This research paper deals with the scenario that a storage or battery is needed in order to harness the solar energy when the sunlight is available and supply it in vice versa conditions. For this, a cost effective system is built which charges a battery with the help of solar panel and protection is given to the battery in case of overcharge, deep discharge and under voltage condition. The block diagram, circuit diagram, hardware design are discussed in the paper.

Index terms— solar panel, battery, transistors, lm-324, op-amps, load.

1 I. Introduction

Solar Power Charge Controller can be used in various sectors. For instance, it can be used in solar home system, Hybrid systems, solar water pump system etc. In this, a solar panel converts sunlight energy into electrical energy through an electrochemical process also known as photovoltaic process. Energy is stored in the battery with the help of solar panel through a diode and a fuse. Energy stored in the battery can be used when there is no sunlight as during discharge, chemical energy is converted into electrical energy which in turn illuminates electrical appliances or helps in pumping water from the ground [1]. Hence, it is needed to protect battery from overcharge, deep discharging mode while dc loads are used or in under voltage as it is the main component in a solar power charge controller. [2] In this project, indications are provided by a red LED for fully charged battery while a green LED indicates that battery is charging. White LED is provided in order to indicate overcharge, deep discharge or under voltage condition. Charge controller also uses MOSFET as power semiconductor switch to ensure cut off the load in low battery or overload condition. When the battery gets fully charged, a transistor is used in order to bypass the solar energy to a dummy load which protects the battery from getting over charged.

A solar charge controller or regulator is a small box placed between a solar panel and a battery consisting of solid state circuits PCB. They are used to regulate the amount of charge coming from the solar panel in order to protect the battery from getting overcharged. Adding to this, it can also be used to allow different dc loads and supply appropriate voltage. [2]

2 II. Block Diagram

In figure 1, the basic arrangement of the implemented project can be found.

3 a) Components Used

The main components used in order to establish the project are Photovoltaic Cells and Solar panel, battery, LM 324 and Transistors.

4 i. Photovoltaic Cells and Solar panel

Photovoltaic (PV) cells are the one which are made from special materials called semiconductors like Silicon. They are used for conversion of light into electricity using semiconductor materials that exhibit the photovoltaic effect. When the light strikes the cell, certain amount of light gets absorbed into the semiconductor material which triggers the flow of electrons that causes current to flow. We can place metal contacts on top and bottom of the cell, from which we can draw current externally.

Solar panel is a panel designed to absorb sun's rays in order to generate electricity or heat. A PV module is a packaged consisting of solar cells. Solar panels constitute the solar array of a PV system that helps in generating and supplying electricity to commercial and residential sectors. Following are the advantages of solar panels-? These are the equipments that can covert solar energy into electrical energy directly, easily and efficiently. ? They can easily last for 25 years and does not require much operational maintenance. [4] Figure ??: Solar Panel ii. Battery In this project a Sealed Rechargeable Battery (6V4.5AH/20HR) is used in order to store energy. An Electrical battery converts chemical energy directly into electrical energy comprising of one or more electro chemical cells. The battery comes in all shapes and sizes and can be used for household, robotics, industrial applications etc. For example, miniature (small) cells can be used to power devices such as hearing aids, wristwatches etc. whereas as large batteries can be used telephone exchanges, computer data centres, power substations etc. A 12V, lead-acid battery has 6 cells. The range is 0.1C rate, where C is the battery capacity in Ah in order to charge lead acid batteries safely. The major disadvantage of overcharging a battery is that it can cause reduction in its life span. [3][9] There are three types of transistors used in this project.

5 ? SL 100

It is a general purpose, medium power NPN transistor and is commonly used as a switch in common emitter configuration. The transistor terminal requires a fixed DC voltage in order to operate in a desired region of its characteristic curves. It is known as biasing and is used for switching applications. Biasing is done in such a way that it will remain fully on if there is a signal at its base otherwise not. The emitter can be recognized as it will be projecting out. The base is nearest to emitter while collector is far away in the casing. connected to GND through resistor R10 of 120K. 7 th Pin of U1: B is an O/P pin connected to Led Green and Red through R7 of 1K and R15 of 2K respectively. . VI: C is also an op-amp whose 10 th Pin is connected to POT of 5K of which one of the terminal is connected to 2 nd Pin of U1:A whereas 9 th Pin is connected to GND. 8 th Pin of U1: C is an O/P Pin which is connected to Gate of MOSFET Q2 through Diode IN4148. Along with this, 9 th Pin of U1: C is also connected to drain of MOSFET whose gate is also connected to POT of RV1 which will also get O/P of U1: D known as Pin 14. 12 th Pin and 13 th Pin of U1: D is connected to RV5 (22K PRESET) and to 4 diodes in series known as D5, D6, D7, D8 respectively. The Source of U1: D is connected to GND.

6 b) Working

7 Solar panel section

In this, battery B1 is charged via d10 and fuse. After battery getting fully charged, Q1 conducts from output of the comparator ie Pin 1, resulting in Q2 to conduct and divert the solar power through D11 and Q2. In this way battery is not over charged. pin 6 of U1:B via R9 and pin 10 of U1:C via 5K variable resistor. Solar panel being a current source is used to charge the battery B1 via D10. While the battery is fully charged, the voltage at cathode point of D10 goes up resulting in the set point voltage at pin 3 of U1: A to go up above the reference voltage because of the potential divider formed by R12 of 22K, 5K variable resistor, R13 of 15K goes up.

This results in pin no 1 of U1: A to go high to switch 'ON' the transistor Q1 that places drive voltage to the transistor SL 100 such that the current from solar panel is bypassed via D11 and the transistor's collector and emitter. Simultaneously pin 7 of U1: B also goes high to drive a led D1 indicating battery is being fully charged. While the load is used by the switch operation Q2 usually provides a path to the (-ve) while the (+ve) is connected to the DC (+ve) via the switch in the event of over charge, the reference voltage at Pin 10 results in pin 8 of U1: C going low to remove the drive to the gate through the D4 of the MOSFET Q2 which in turn disconnects the load. In the event of over charge, Q2 voltage across drain and source goes up which results in Pin no 9 going above pin no 10 via R22. In the event of battery voltage falling below minimum voltage is duly sensed by the combination of D3, R6, RV5 and R16 in Pin 12 resulting in Pin 14 going zero to remove the drive to Q2 gate via R20 and RV1. The correct operation of the load in normal condition is indicated by D9 when the MOSFET Q2 conducts.

8 IV. Hardware Implementation

Step 1

First, the circuit is implemented on the Printed Circuit board (PCB). Step 2 Powering the Circuit

The "slide switch on the side of solar panel and battery" is switched "On" due to which, Red LED glows indicating that battery is fully charged. Now, switch "ON" the "second slide switch nearer to the load". After switching both, load will also switch on and the fan will start rotating.

The "Preset 1 nearer to red and green led" is adjusted in this project in order to set the battery charge. A battery while charging is indicated by a glowing "Green" LED. In order to test overcharge protection, rotate Preset 2 one which is close to white LED and is subjected to deep discharge/overcharge. So, when the preset is rotated, the white LED starts glowing and the fan will stop rotating. Secondly, in order to test under voltage protection, rotate Preset 3 which is second to white LED. After preset is rotated, the white LED will glow and the fan will stop rotating. This will conclude our under voltage test. After rotating the preset we will see that the rotating speed of the fan will increase and vice versa will happen when done in opposite direction. energy through a solar panel and how it can be used in order to supply power when there is no sun. It also includes protection methods for the battery in order to curb problems like overcharging, deep discharge or

9 V. Conclusion

In this paper, a solar power charge controller has been discussed effectively i.e. how rechargeable battery is used to store energy with the help of solar under voltage which harm the life of a battery. The proposed system used solar PV module as an input and DC load (fan) as an output. Further the project can be Year 2016 F enhanced by using microcontroller and GSM modem to communicate the status of the system to a control room via SMS. This system can also be upgraded to control normal UPS, when connected with the solar charger will convert to SOLAR INVERTER/UPS with solar charge as priority. [2]


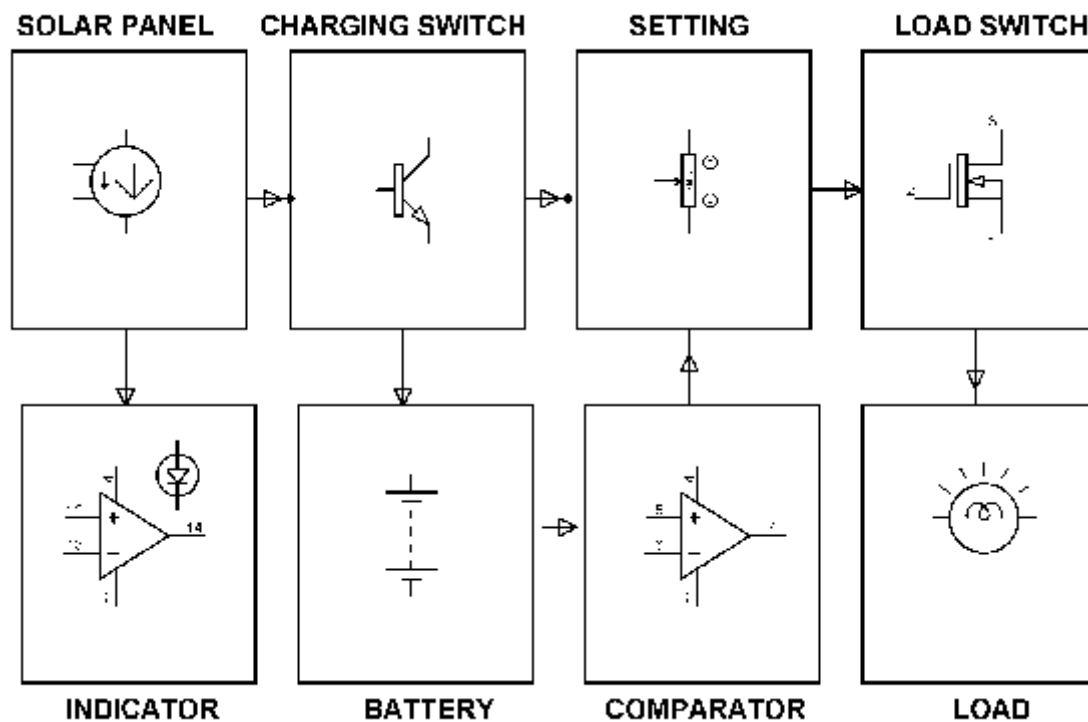


Figure 1: Figure 1 :

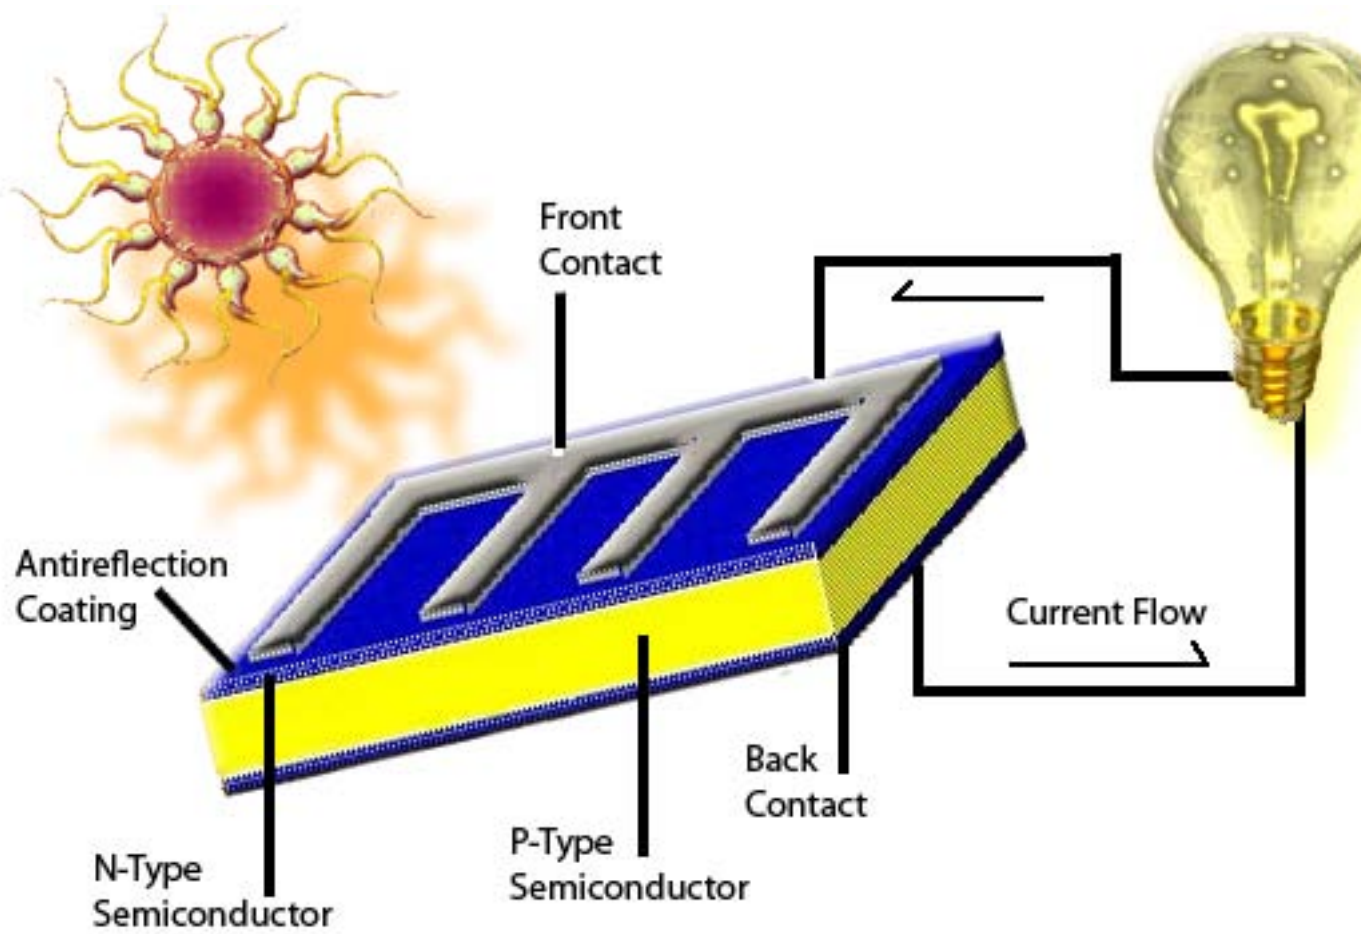

3

Figure 2: Figure 3 :



Figure 3: Figure 5 :



Figure 4:


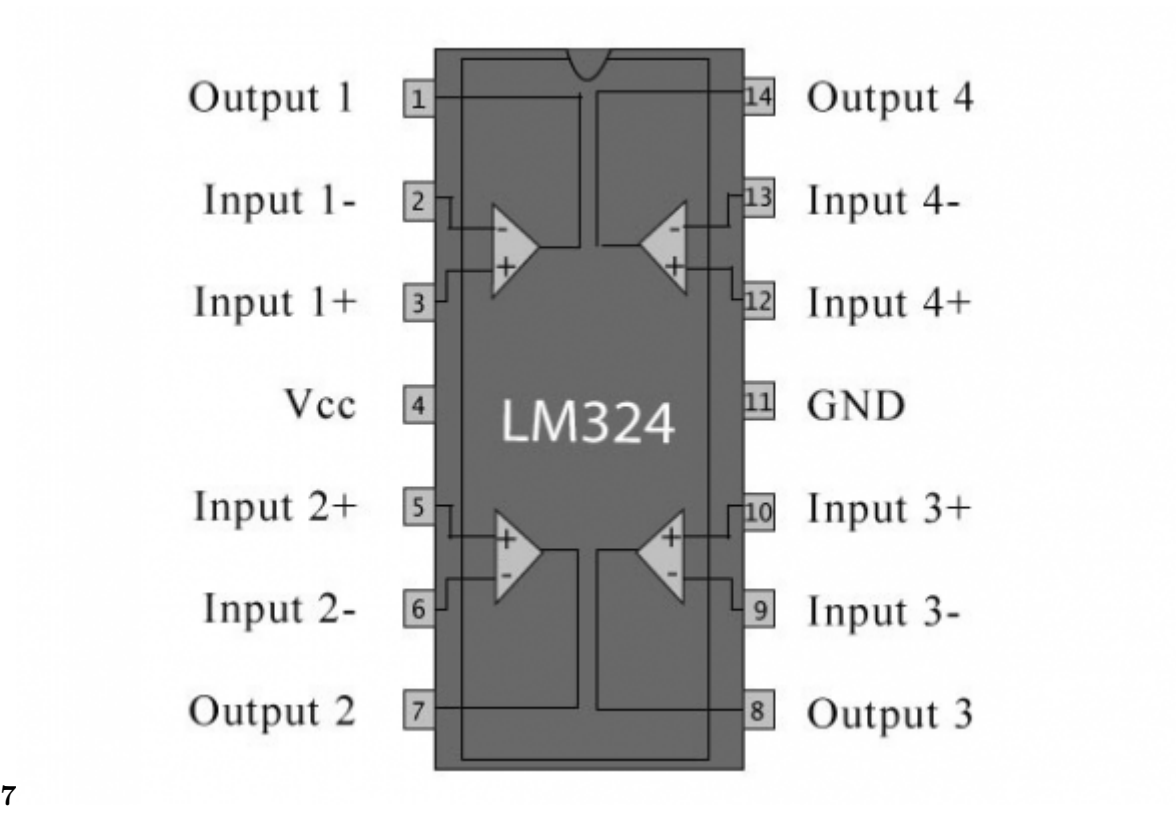


Figure 5: Figure 7 :



9

Figure 6: Figure 9 :

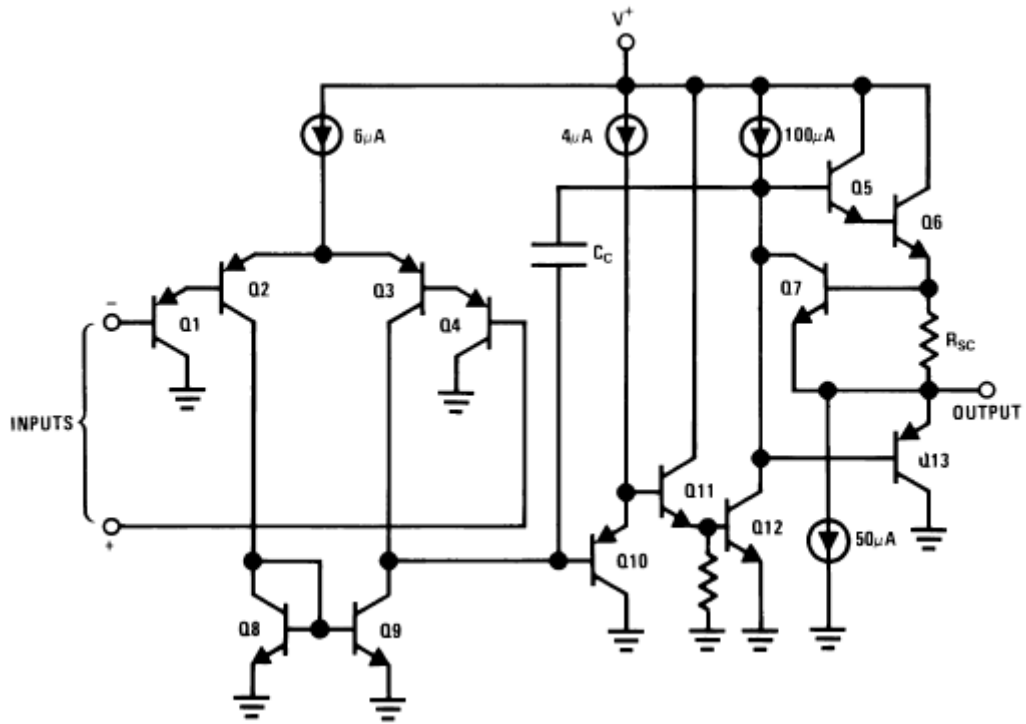

9

Figure 7: Figure 9 :



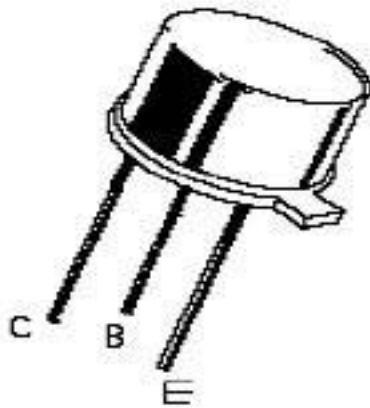


Figure 8: F

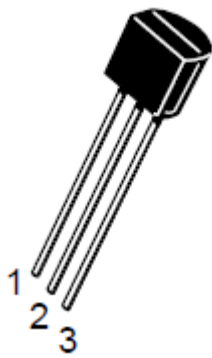


10

Figure 9: Figure 10 :

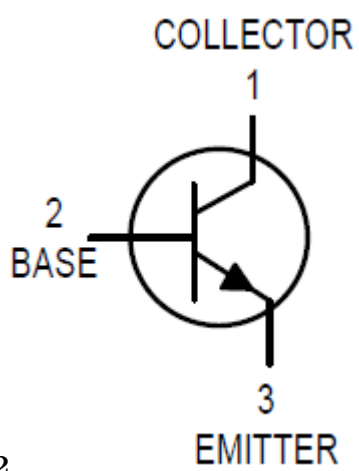

12

Figure 10: Figure 12 :

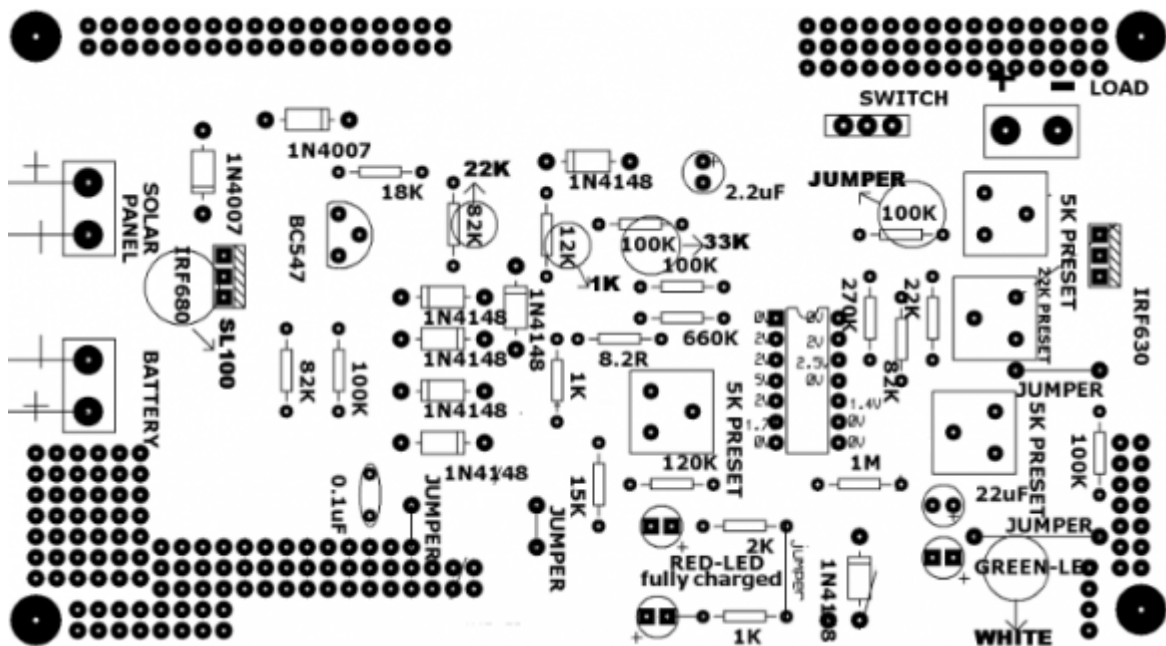




Figure 15: Figure 16 :

[Shetty et al.] , Rakshit Shetty , Aniket Upadhyay , Mahesh Shinde . Mumbai; India. 400022. Chirag Rajput,
Prof. Martand Jha, Department of Electronics and Telecommunication, K. J. Somaiya Institute of Engineering
& Info. Technology (IJETR)

[Mohammad Shariful Islam et al. ()] , Mohammad Shariful Islam , R/A Dhanmondi , Bangladesh .
10.13189/aep.2015.030203. *Advances in Energy and Power* 2015. 3 (2) p. .

[International Journal of Engineering and Technical Research (2014)] , *International Journal of Engineering
and Technical Research* 2321-0869. December 2014. (2) .

[Design and Of Microcontroller (2008)] ‘3Assistant General Manager, Research and Development, BPL Techno
Vision Private Limited’. Development Design , Of Microcontroller . *Solar Charge Controller; Wallies
Thounaojam1, V Ebenezer2, Avinash Balekundri3 1M*, (Bangalore, India; Bangalore, India; IJEATE) 2008.
May 2014. 9001. (Certified Journal)

[Zar Ni Tun ()] ‘Aye Thin Naing, Hla Myo Tun; IJSTR’. Zar Ni Tun . ISSUE 06. *INTERNATIONAL JOURNAL
OF SCIENTIFIC & TECHNOLOGY* 2277- 8616. JUNE 2016. 5.

[Design and Construction of Microcontroller Based Solar Battery Charger] *Design and Construction of Micro-
controller Based Solar Battery Charger*,

[Photovoltaic Charge Controller Using Mppt Algorithm] *Photovoltaic Charge Controller Using Mppt Algorithm*,

[Thin Film Solar Charge Controller: A Research Paper for Commercialization of Thin Film Solar Cell] *Thin
Film Solar Charge Controller: A Research Paper for Commercialization of Thin Film Solar Cell*,