

An Extensive Evaluation of the Proposal for "Unified Terrain Categories Exposures and Velocity Profiles" by Choi (2009)

S. A. Hsu¹

¹ Louisiana State University

Received: 8 December 2012 Accepted: 31 December 2012 Published: 15 January 2013

Abstract

The proposal for "unified terrain categories exposures and velocity profiles" by Choi in 2009 has been evaluated extensively. On the basis of 6 articles in open literature (3 papers during Typhoon Muifa in 2011, one during Hurricane Ike in 2008, one during Typhoon Sally in 1996, and one during an atmospheric dispersion experiment in New York City, USA) and nearly simultaneous upper-air measurements when available, it is found that the proposed criteria (except the displacement height) by Choi are evaluated to be useful operationally for engineering applications. An alternative approach using the mean building height (rather than the displacement height) as the input to estimate the power-law exponent and the gradient height is proposed for practical use.

Index terms— Typhoon Sally, Typhoon Muifa, Hurricane Ike, Tall buildings, Power-law exponent, Roughness length, Gradient height, Displacement height, Terrain expos

1 Introduction

Building or structural damages by storms, whether they are tropical or extra-tropical cyclones, require an estimation of wind speed. Numerous methodologies have been proposed and used (see, e.g. Wieringa, 1992, Zhou and Kareem, 2002, and Irwin, 2006). Most recently, Choi (2009) has proposed his "Unified Terrain Categories Exposures and Velocity Profiles" as presented in Table 1. The purpose of this study is to evaluate Table 1. II.

2 An Evaluation During Typhoon Muifa in 2011

During Typhoon Muifa in 2011 there are 3 studies which can be used for our evaluation. They are: a) Wind Measurements at Two Locations on the Sutong Bridge

According to Xu et al (2013), the Sutong Bridge across the low reaches of the Yangtze River in China is a cable-stayed bridge with its longest span, which is under constant monitoring because of tropical cyclones and other strong winds. During Typhoon Muifa in 2011, there were two anemometers on the bridge. The mean wind speed measured at 76m was 17.08 m/s and at 300.4 m 19.58 m/s, respectively. Using the power-law wind profile formula (see, e.g. Hsu, 1988), we have $U_2/U_1 = (Z_2/Z_1)^p$ Note that U_2 and U_1 are the wind speeds at height Z_2 and Z_1 , respectively. p is the exponent of the power law. Now, compare this over-water p ($=0.100$) with that in Table 1 for open water in Category I in which $p = 0.103$, we can say that the agreement is excellent. Note that the p ($=0.10$) value has been measured over the Sicily Strait by Hsu(1988), over the Gulf of Mexico by Hsu et al. (1994) under fair weather condition and by Hsu (2011) under hurricane condition. Note also that these measurements on the Sutong Bridge are unique in that it was over a large (the Yangtze) river. While the power law has been discussed above, the log law is presented as follows:

In the atmospheric boundary layer, vertical distribution of the wind speed (under strong wind conditions so that the thermal effects may be neglected, see Hsu, 2003) can be formulated according to the logarithmic wind profile (e.g. Panofsky and Dutton, 1984) as: $U_z = (U^*/k) \ln ((Z-d)/Z_0)$ (3)

Where U_z is the wind speed at height Z , U^* is the friction velocity, k ($=0.4$) is the von Karman constant, d is the displacement height, and Z_0 is the roughness length.

Note that when Z is much larger than d , Eq. (??) may be reduced to $U_z = (U^*/k) \ln(Z/Z_0)$ (4)

Statistically, Eq. (??) can be written as $\ln Z = \ln Z_0 + (k/U^*) U_z$ (5) $Y = a_0 + a_1 X$

Where $Y = \ln Z$, $X = U_z$, and $Z_0 = \exp(a_0)$ (6) Analysis of the log law is presented in Fig. ?? . Since approximately 95 per cent of the wind speed variation with height can be explained by this law (because $R^2 = 0.95$), we can get $Z_0 = 0.223$. Figure ?? : Verification of logarithmic wind profile during Typhoon Muifa in 2011 on the east coast of Shanghai, China Analysis of power law is provided in Fig. ?? , which demonstrates that nearly 96 per cent of the wind speed variation with height can be explained by the power law so that $p = 0.194$. Note that since R^2 is higher for the power law than that for the log law, we can say that the former is as good as the latter for engineering applications. Before the analyses of upper-air data are performed, the concept of virtual potential temperature, θ_v , needs to be discussed briefly, since it can serve as a stability criterion for an atmosphere with a moisture gradient. For more detail, see Stull (1988). For our analyses, we need to know that when θ_v is constant, the atmospheric boundary layer is statically neutral. When it decreases with height, the atmosphere is statically unstable. When it increases with elevation, the atmosphere is statically stable. Since the power-law wind profile is valid within a neutral boundary layer, we need to plot this virtual potential temperature value with height so that the gradient height can be determined. $\theta_v = 0.2124x -$

Figs. 4 thru 9 show our results during Typhoon Muifa in 2011 near Shanghai. It can be seen from Figs. 6 and 9 that the average gradient height during these two rawinsondings is $(677 + 611)/2 = 644$ m, which is close to the value of 650 m as proposed in Table 1 for Category VI. Note that at 12Z on 06 August 2011, the wind was light and variable near the ground as shown in Figs. ?? and 5, but at 611 m, the wind speed was 17 m/s and direction from 40 degrees. Similar condition was prevailed 12 hours later (Figs. ?? and 8), but the direction was from 315 degrees with a speed of 7.2 m/s near the ground. At 611m, the speed increased to 26.3 m/s and the direction was from 340 degrees. Height, in meters Virtual potential temperature, in degrees kelvin (??) is presents in Fig. 11, which also indicates that the exponent is determined to be 0.35. This value is close to 0.362 as proposed in Table 1 for Category IV. 1, this value is expected to be the same as that of the wind speed at 650 m over NYC. So, we set $U_{650m} = 10.6$ m/s to compute the wind speeds located at the three rooftops.

For the rooftop at 229m, we have These computed values are listed in Table 2 so that they can be compared to the measurements as provided in Hanna et al (2007). Since the margin of error in wind speed measurement is 10 % as stated above, we can say based on Table 2, that the agreements are excellent and Table 1 is evaluated here as useful. IV.

3 Global Journal of Researches in Engineering

An Evaluation using Measurements in Houston, Texas, during Hurricane Ike in 2008

When Hurricane Ike passed over the City of Houston, Texas, in September 2008 (see Berg, 2008), there were two wind speed measurements at 20 and 60 meters on a 91 meter communication tower (see Schade, 2012) which are useful for our evaluation as follows: a) A Comparison of Boundary-layer Parameters with Table 1 According to Schade (2012), several boundary layer parameters are available for the comparison as shown in Table 3. It can be seen that the Tower in Houston is located in Category V. While both values of roughness parameter and power-law exponent are in excellent agreement, the displacement is not. A recent study of zero-plane displacement height, d , in a highly built-up area of Tokyo shows that the value of d may not be determined from the average building height because of the large difference in building heights (see Tanaka et al., 2011). Therefore, values of the displacement height as listed in Table 1 need to be further evaluated. But, for now, it is listed only as a general guide. In order to evaluate the tower measurements from Houston, we need to first determine the power-law exponent from nearby Hobby Airport, which was not exactly located in open country but between Categories II and III. This is accomplished as follows:

According to Hsu (2013), the power-law exponent, p , can be determined from the 5-second gust over 2 minute (sustained wind speed) period as used in wind speed measurements by the Automated Surface Observing System (ASOS) station at airport worldwide such that, $G = 1 + 2.04 P$ (7)

Where G is the gust factor (the ratio of 5-s gust to 2-min sustained wind speed) and p is the power-law exponent. Fig. ??2 shows that since $G = 1.3672$ at Houston Hobby Airport, $P = 0.180$, indicating this location was between Categories II and III. Because there is no further classification, we need to produce the statistical relationships amongst roughness length, power-law exponent and the gradient height. On the basis of Table 1, these relationships are analyzed and presented in Figs. ??3 through

4 E

With these methods we can compute the wind speeds at the two heights on the Houston tower as follows:

Based on Fig. ??3, given $p = 0.180$ for Houston Hobby Airport, the gradient height is estimated to be 395 m; From Fig. ??2, the max sustained 2-min wind speed over Hobby was approximately 34 m/s. Therefore the wind speed at the gradient height of 395 m over Hobby Airport is $U_{395m} = U_{10m} * (395/10)^{0.18} = 34 * 1.94 = 66$ m/s, According to ??chade (2007), the mean turbulence intensity was 0.29 for the tower. According to Hsu (2013), the power-law exponent, p , is numerically equal to the turbulence intensity. We can assign $p = 0.29$ for

this tower location. Thus, from Fig. ??3, the gradient height over the tower is 565 m. Now, we can now compute the wind speed at 60 m at the tower to be $U_{60m} = U_{565m} * (60/565)^{0.29} = 66 * 0.52 = 34$ m/s.

Similarly, the wind speed at 20 m on the tower is computed as $U_{20m} = U_{565m} * (20/565)^{0.29} = 66 * 0.38 = 25$ m/s.

A comparison of these estimations against the measurements is presented in Table 4. It is found that the agreement is excellent, indicating that our methodology as provided above is operational. V.

5 An Evaluation using mean Building Height as Input

As stated above, the construction of few super tall buildings (building height > 300 m) in several cities makes the estimation of displacement difficult. However, for many urban areas, it is still useful to employ the mean building height as an input to estimate the displacement height. This is done as follows:

According to the data as provided in Burian et al (2005), which is listed in Table 5, we can say that the displacement height is approximately 72 per cent of the mean building height in the downtown core areas in the cities as studied. This value is reasonably close to that of 80 % as suggested by ??anofsky and Dutton (1984, P.376), since the difference is about 10 %. $Z_0 = 0.2$ d(8)

Since the coefficient of determination, $R^2 = 0.97$, is very high, Eq. (8) should be useful operationally. An Evaluation using Typhoon Sally in 1996 over Hong Kong and Shenzhen, China

Full-scale monitoring of typhoon effects on super tall buildings was conducted during the passage of Typhoon Sally in 1996 (see Li et al., 2005). For our evaluation, we employ the measurements at Cheung Chau. From the position provided in Li et al (2005), this station is located in Category I. According to ??su (1988, p. 202), $P = 0.10$ and Hsu (1988, pp. 126-127), the gradient height = 250 m. These values are in excellent agreement with Category I as listed in Table 1.

Further verification of the gradient height over Hong Kong City is presented in Figures ??8 and 19, which show the distinct characteristics of two layer flow with the separation elevation located at 694 m in both wind speed (Fig. ??8) and direction (Fig. ??9). Since the difference between this measured value of 694 m and the proposed value of 650 m is approximate 6 percent, we may use the proposed value as a first approximation. With the aforementioned verification of the gradient height in mind, we can now compare the wind speed measurements atop the tall building and the wind speed estimates from Table 1 in Hong Kong.

First, on the basis of the measured max wind speed of 37.5 m/s at 92 m at Cheung Chau, the wind speed at 250 m over that station (Cat. I) is $U_{250m} = U_{92m} * (250/92)^{0.103} = 37.5 * 1.11 = 41.6$ m/s. This max speed is expected to be the same at U_{650m} over Hong Kong and Shenzhen so that the max wind speeds atop of the Central Plaza Tower at 374 m in Hong Kong and Di Wang Tower at 384 m in Shenzhen are estimated from Table 1 for Cat. VI as $U_{374m} = U_{650m} * (374/650)^{0.362} = 41.6 * 0.82 = 34.1$ m/s, and $U_{384m} = U_{650m} * (384/650)^{0.362} = 41.6 * 0.83 = 34.5$ m/s, respectively. These results are compared with measurements as shown in Table 6. Since the average difference is $(0.13 + 0.03)/2 = 0.08$ or 8 %, which is within 10 % for the composite margin of error for wind speed measurements, it is reasonable to say that Table 1 is evaluated to be useful operationally.

6 VII.

7 Conclusions

A proposal based on Choi in 2009 for "unified terrain categories exposures and velocity profiles" has been evaluated extensively in this study. This evaluation includes 3 separate papers published most recently under the conditions of Typhoon Muifa in 2011 over the greater Shanghai, China, region, one study during Hurricane Ike in 2008 over Houston, Texas, USA, one paper for super tall buildings (> 300m) during Typhoon Sally in 1996 over Hong Kong and Shenzhen, China and one study during an atmospheric dispersion experiment in New York City, USA. In addition, in order to support the evaluation of gradient height, upper-air sounding measurements are acquired and analyzed when appropriate. On the basis of these evaluations, it is found that the criteria as shown in Table 1 are useful operationally for engineering applications except the designation of the displacement height which requires further investigation. An alternative approach using the mean building height as the input for the power-law exponent is proposed.

Year 2013 Volume () E ^{1 2}

¹© 2013 Global Journals Inc. (US)An Extensive Evaluation of the Proposal for "Unified Terrain Categories Exposures and Velocity Profiles" byChoi (2009)

²© 2013 Global Journals Inc. (US)




Figure 1:

1


		B				v VI	
Category		Exposure (description)		Roughness		Displacement	
				Length, law		Height, sue	
				me- ex- po- nent		ters	
Cat I	Open water and coastal areas (open sea or lake with few obstructions)	0.002	0.103	250	5		
Cat II	Open country (terrain with scattered obstructions up to 10 m high. Rural areas with a few low rise buildings)	0.04	0.15	350	5 10	Global	
Cat III	Forest/Sub-urban scattered low (3-5 m) buildings (numerous closely spaced 3-5 m obstructions)	0.2	0.198	450	15	Journal	
Cat IV	Urban, large town (many medium height (10-50 m) buildings)	0.5	0.241	500		of Re- searches in Engi- neering	

Figure 2: Table 1 :

An Extensive Evaluation of the Proposal for "Unified Terrain Categories Exposures and Velocity Profiles"
by Choi (2009)

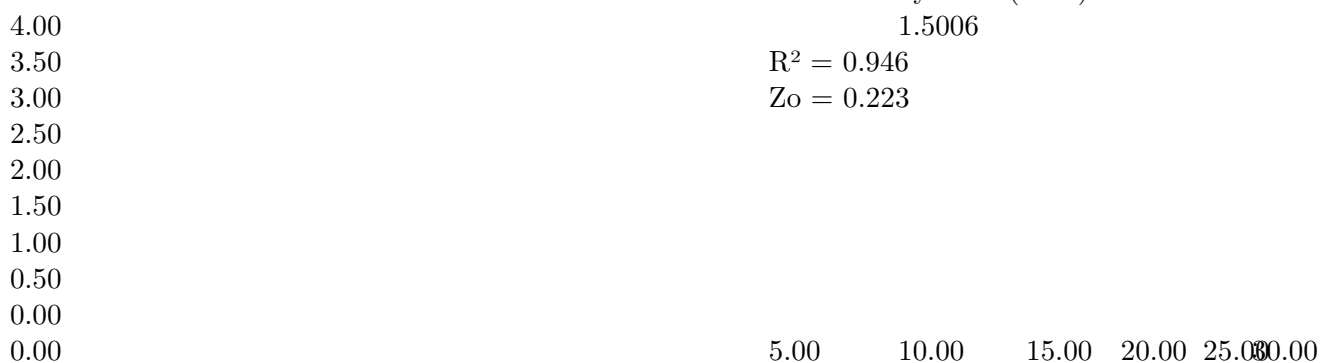

(Data Source : Peng et al, 2013)

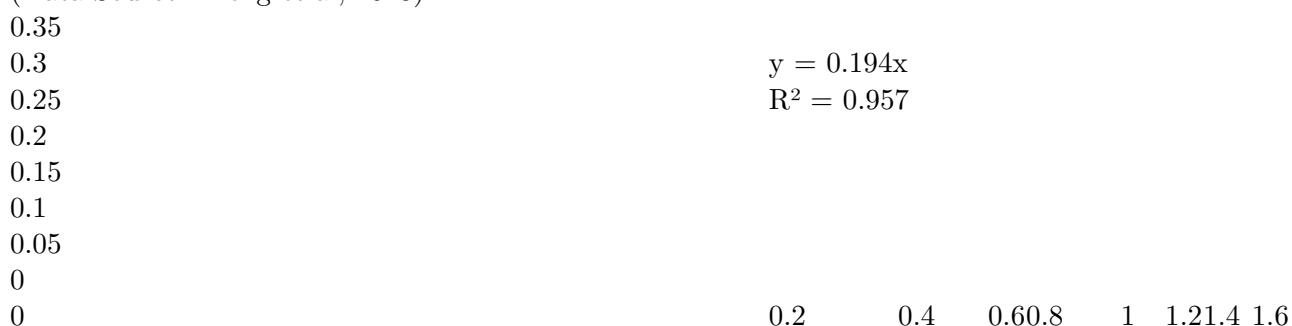

(Data Source : Peng et al, 2013)

Figure 3 : Verification of power-law wind profile during Typhoon Mufia in 2011 on the east coast of Shanghai

©
2013
Global
Jour-
nals
Inc.
(US)

Figure 3: Ln Z Wind speed, U_z , in m/s

Now, comparison of these $Z_0 = 0.223$ and $p = 0.194$ values to those in Table 1, we can see that the

measurement site in Peng et al (2013) was located at Category III. Since values of Z_0 and p are consistent with those provided in Table 1, we can say that Cat. III is verified.

c) Wind speed measurements at 494 m atop the Shanghai World Financial Center during Typhoon Muifa in 2011 An et al (2012) present their wind measurements atop the Shanghai World Financial Center (SWFC) during Muifa. The maximum 10-min mean wind

$$U_{494m} = U_{650m} * (494/650)^{0.362} = 39.37 * 0.91 = 35.65 \text{ m/s}$$

speed reaches 32.97 m/s at 494 m on the rooftop. With this data we can evaluate Cat. VI using Table 1 that $p =$

0.198 for Cat. III. First, we need to estimate the wind speed at 450 m by applying the power law as follows: $U_{450m}/U_{10m} = (450/10)^{0.198} = 2.12$

$U_{450m} = 18.53 * 2.12 = 39.37$ m/s This value is expected to be the same at 650 m over SWFC. Now, the wind speed at 494 m atop SWFC is estimated to be

Year
2013
3
v VI
Ver-
sion
I
XIII
Issue
Volume
() E
Global
Jour-
nal of
Re-
searches
in
Engi-
neer-
ing

[Note: d) Upper-air Measurements from Shanghai during Muifa As indicated in Table 1, the gradient height over measurement at this altitude at present time, we employ the routine upper-air sounding called rawinsonde instead. According to Geer (1996), rawinsonde is a method of upper-air observation consisting of an evaluation of the wind speed and direction, as well as temperature, and humidity aloft by means of a balloonborne radiosonde (instrument package) tracked utilizing position change as determined by directional radio techniques. Note that rawinsonde measurements are routinely available twice per day at many places around the world including Shanghai, China (see www.ncdc.noaa.gov).]

Figure 4: $\ln(U_2/U_1)$ $\ln(Z_2/Z_1)$

Figure 6 : Rawinsonding of virtual potential from Shanghai, China, at 12Z on 06 Aug 2011 during Typhoon

Figure 5:

3

)

Figure 6: Table 3

2

measured wind speeds at 3 heights in NYC (Data

source: Hanna et al, 2007)

R Rooftop height, m	Measured speed,m/s	Wind Computed Wind speed, m/s	Difference in Per cent
229	7.3	7.3	0 %
153	5.8	6.3	8 %
34	3.6	3.6	0 %

Figure 7: Table 2 :

3

Source Roughness Length, Z_0 ,	Source Roughness		Displacement Height, m
		Power-law Ex- ponent, p	
	m		
Houston Tower	1.0	0.29	8
Table 1	1.0	0.289	20

b) A Comparison of Wind Speed Measurements

Figure 8: Table 3 :

4

Hurricane Ike in 2008					
Height, m	Estimated wind Speed, m/s	Measured m/s wind	Speed,	Difference cent	In per
60	34	33		3 %	
20	25	25		0 %	

Figure 9: Table 4 :

5

City	Burian et al, 2005)		
	Mean building Height in Downtown, m	Displacement Height, d, m	Ratio
Los Angeles	45	27.38	0.61
Houston	22.8	19.87	0.87
Oklahoma City	19.4	13.14	0.68
Albuquerque	14	12.93	0.92
Phoenix	16.2	11.55	0.71
Portland	18.1	9.97	0.55
		mean	0.72

Using Table 5, we can now analyze and plot the relationship between the mean building height and the displacement height. Since there are only 6 cities, this $R^2 = 0.76$ is considered to be useful as a first approximation. This is needed since there are many cities in the hurricane or typhoon prone areas, which does not have the survey of the displacement height as those shown in Table 5, but the mean building heights in many downtown areas are known as published in the National Building Statistics Database: Version 2 by the Los Alamos National Laboratory (Publication Number LA-UR-08-1921).

Figure 10: Table 5 :

6

Sally in 1996

Figure 11: Table 6 :

-
- [Global Journal of Researches in Engineering] , *Global Journal of Researches in Engineering*
- [Stull ()] *An Introduction to Boundary Layer Meteorology*, R B Stull . 1988. London: Kluwer Academic Publishers.
- [APECWW/-Benchmark/terrain_CHOI.pdf] *APECWW/-Benchmark/terrain_CHOI.pdf*,
- [Panofsky and Dutton ()] *Atmospheric Turbulence*, H A Panofsky , J A Dutton . 1984. New York: John Wiley & Sons.
- [Berg ()] *Available online at www.nhc.noaa.-gov/pdf/TCR-Ike_3May10.pdf*, R Berg . 2008. AL092008_Ike. (Tropical Cyclone Report, Hurricane Ike (092008))
- [Schade ()] *Characteristics of Hurricane Ike during its passage over*, G W Schade . 10.5772/51344. <http://dx.doi.org/10.5772/51344> 2012. Houston, Texas.
- [Hsu ()] *Coastal Meteorology*, S A Hsu . 1988. London: Academic Press.
- [Zhou (2002)] 'Definition of wind profiles in ASCE 7'. Kareem Zhou , A . *Journal of Structural Engineering* 2002. August 2002. p. .
- [Hsu et al. ()] 'Determining the power-law exponent under nearneutral conditions at sea'. S A Hsu , E A Meidl , D B Gilhousen . *Journal of Applied Meteorology* 1994. 33 (6) p. .
- [Hsu ()] 'Estimating overwater friction velocity and exponent of power-law wind profile from gust factor during storms'. S A Hsu . *Journal of Waterway, Port, Coastal and Ocean Engineering* 2003. 129 (4) p. .
- [Hsu ()] 'Estimating the 3-second gust on rooftops of residential and low-rise buildings during a hurricane'. S A Hsu . *Global Journal of Researches in Engineering* 2013. 13 (5) p. . Civil and Structural Engineering (Version 1.0)
- [Irwin ()] 'Exposure categories and transitions for design wind loads'. P A Irwin . *Journal of Structural Engineering* 2006. November 2005. p. .
- [An et al. ()] 'Field measurement of wind characteristics of Typhoon Muifa on the Shanghai World Financial Center'. Y An , Y Quan , M Gu . ID 893739. *International Journal of distributed sensors networks* 2012. 2012.
- [Li et al. ()] 'Fullscale monitoring of typhoon effects on super tall buildings'. Q S Li , Y Q Xiao , C K Wong . *Journal of Fluids and Structures* 2005. 20 p. .
- [Geer ()] 'Glossary of Weather and Climate'. I W Geer . *American Meteorology Society* 1996.
- [Burian et al. (2005)] 'LA-UR-05-1822'. S J Burian , W S Han , M J Brown . *Morphological analyses using 3D building databases*, (Seattle, Washington) 2005. April 2005. Los Alamos National Laboratory
- [Hanna et al. ()] 'Observed winds, turbulence, and dispersion in built-up downtown areas of Oklahoma City and Manhattan'. S Hanna , J White , Y Zhou . *Boundary-Layer Meteorology* 2007. 125 p. .
- [Choi (2009)] 'Proposal for unified terrain categories exposures and velocity profiles'. E C C Choi . <http://www.wind.arch.t-kougei.ac.jp/-> *Seventh Asia-Pacific Conference on Wind Engineering*, (Taipei, Taiwan) 2009. November 8-12, 2009.
- [Peng et al. (2013)] 'Study on near-ground wind characteristics of a strong typhoon-wind speed, turbulence intensities, gust factors and peak factors'. H Peng , W Xu , Gu Ming . *Disaster Advances* 2013. May 2013. 6 (5) p. .
- [Xu et al. (2013)] 'Study on wind characteristics of Typhoon Muifa on the Sutong Bridge'. C Xu , H Wang , H Cheng , Z Zong , Y Zhang . <http://-. Wuhan University Journal of Natural Sciences> 2013. April 2013. 18 (2) p. .
- [Wieringa ()] 'Updating the Davenport roughness classification'. J Wieringa . *J. Wind Eng. Ind. Aerodynam* 1992. 1992. p. .
- [Hsu ()] 'Verifying wind profile equations under hurricane conditions'. S A Hsu . www.benthamscience.com/open/tooej/articles/-V004/60T00EJ.pdf *The Open Ocean Engineering Journal* 2011. 4 p. . (Available online at)
- [Tanaka et al. ()] 'Zero-plane displacement height in a highly built-up area of Tokyo'. S Tanaka , H Sugawara , K Narita , H Yokoyama , I Misaka , D Matsushima . 10.2151/sola.-2011-024. *SOLA* 2011. 7 p. .