

A Flood Forecasting Model for the River Padma

Md. Abdur Rakib Hasan¹, Md. Abdur Rakib Hasan² and Sharid Shahnewaz³

¹ Rajshahi University of Engineering and Technology

Received: 11 December 2013 Accepted: 3 January 2014 Published: 15 January 2014

Abstract

Flood constitute one of the critical problems faced by Bangladesh. Due to the unique geographical situation of Bangladesh in the delta of three great rivers, namely the Brahmaputra, the Padma and the Meghna, which drains a vast catchment, flood in this country is usually complex. The problem is gigantic and becomes more complicated with the passage of time. The flood in 1998 sever flood is the highest record. Analysis of water level data of two stations shows that the forecasting model is a linear equation of the type $Y = a + bX$. Data of the nine hydrologic years have been analyzed in this paper. In most cases values of co-efficient 'a' varies from 0.3112 to 1.558 and 'b' from 1.047 to 11.91. The general equation for the flood forecasting for the GoalundoTransi station has been established as $Y = 1.283X - 8.351$ in this paper. The value of travel time of flood wave from base station to forecasting station according to historical method and Mutreja's method is 2days for both.

Index terms— flood, forecasting model, statistical method, travel time.

1 Introduction

Flood affected many of the engineering structures such as bridge, embankment, barrage, levees, reservoirs, etc. while designing the proper safeguards must be made for the safe passage of the maximum expected flood. The structure must be sound not only for its own safety but also for the life and property which might be in danger by its failure. The valley then becomes "flooded". A flood is commonly considered to be an unusually high stage of a river. It is often the stage at which the stream channel becomes filled and starts overflowing its banks. In Webster's new international dictionary, a "flood" is "a great flow of water especially, a body of water, rising, swelling and overflowing and not usually thus covered a deluge, a freshet, an inundation". A flood problem in Bangladesh is gigantic and becomes more complicated with the passage of time. Every year a large area of this country is more or less affected by the flood. For the unique geographical situation of Bangladesh flood cannot be protected. But damages caused by the flood are lowered by the proper and timely forecasting about flood. Most of the flood studies are made for the flood controlling. Here flood forecasting system is very poor. So attempts have been taken to develop appropriate flood forecasting model. Flood is a serious problem in our country. Every year a large number of hydraulic structures, crops and properties are damaged by the flood.

Author's address: Department of Civil Engineering, Rajshahi University of Engineering & Technology, Rajshahi, Bangladesh. e-mails: mnz_ruet@yahoo.com, nirjhor.ruet.ce@gmail.com, sharid.shahnewaz@gmail.com

The necessity of the study is given below: 1. To ensure the safety of the hydraulic structure (like-Barrage, levees etc.).

2. To take measure for the safety of the crops and properties of the adjacent land. Where, Y is a dependent variable and is the water level at the forecasting station at time, t(MSL), X is a independent variable and is the water level at the base station at time (t-T) with T as the travel time between this station and the forecasting station, a, b are multiple correlations co-efficient.

It should be noted that the advanced time for the forecast at the forecasting station is the least of the travel times. The procedures involved in the development of the model are:

1. Identifying flood forecasting stations;

? Identifying potential base stations;
 ? Preparation of data base;
 ? Estimation of travel time; and In this method the travel time is considered as the time difference between the peak water level of the base station and forecasting station.?

ii. Mutreja's Method This method consists in collecting the water level data of flood at base station for the Nth hour and at the forecasting station for the (N+T)-th hour in a tabular form. By taking different values of T different data tables are prepared such that each data table corresponding to one of assumed T. To compute the cross correlation of the water level data of these two stations at different legs the cross correlation of the data on each table is computed. The value of T corresponding to the data table the maximum correlation is travel time of the reach.

2 c) Necessary Data

In this study the following three types of data have been collected:

? Daily water level data ? Daily discharge data

3 ? Danger level data

All these data used in this study were collected from the surface water hydrology -II of Bangladesh Water Development Board (BWDB).

4 i. Discharge Level Data

The BWDB in this the primary source of discharge data. The mean daily discharge data during a water year is published by hydrology directorate of the BWDB. Data sheet for daily discharge also contains the annual maximum and minimum discharge. Daily discharge data of Hardinge Bridge and GoalundoTransi station of the river Padma are collected for the purpose of this study.

5 ii. Water Level Data

The BWDB is also the primary source of water level data. The water level of the river is measured 5 times a day, at 6.00, 9.00, 12.00, 15.00 and 18.00 hour on staff gauges. The mean of the 5 measurements is published as mean daily water level by the hydrology directorate of BWDB of Dhaka. Data sheets containing the mean daily water level at Hardinge Bridge and Goalundo Transi station of the river Padma during a water year (July to October) are given in Appendix-A. The data sheet also contains the annual maximum water level data of the monsoon period has been used for this study.

iii. Danger Level Danger level data for two stations Hardinge Bridge and GoalundoTransi has been collected from the BWDB, Dhaka. The danger level of Padma at the selected river at the selected stations is given below:

6 Results and Discussion

7 a) Travel Time From Base to Forecasting Station

The travel time from the base station to the forecasting station is given in the following table calculated by two separate methods. The following graphs show the correlation of Nth hour stage of base station with (N+T)-th hour stage of forecasting station. Putting the value of daily water level data at X axis (base station) and daily water level data at Y axis (forecasting station) after the travel time T and finally get a linear equation.

8 Conclusions

The following conclusions can be drawn from the above analysis:

? The accepted value of travel time from Hardinge Bridge to Goalundo Transi is 2 days. ^{1 2}

¹© 2014 Global Journals Inc. (US)

²Year 2014

3123



Figure 1: 3 . 1 . 2 . 3 .

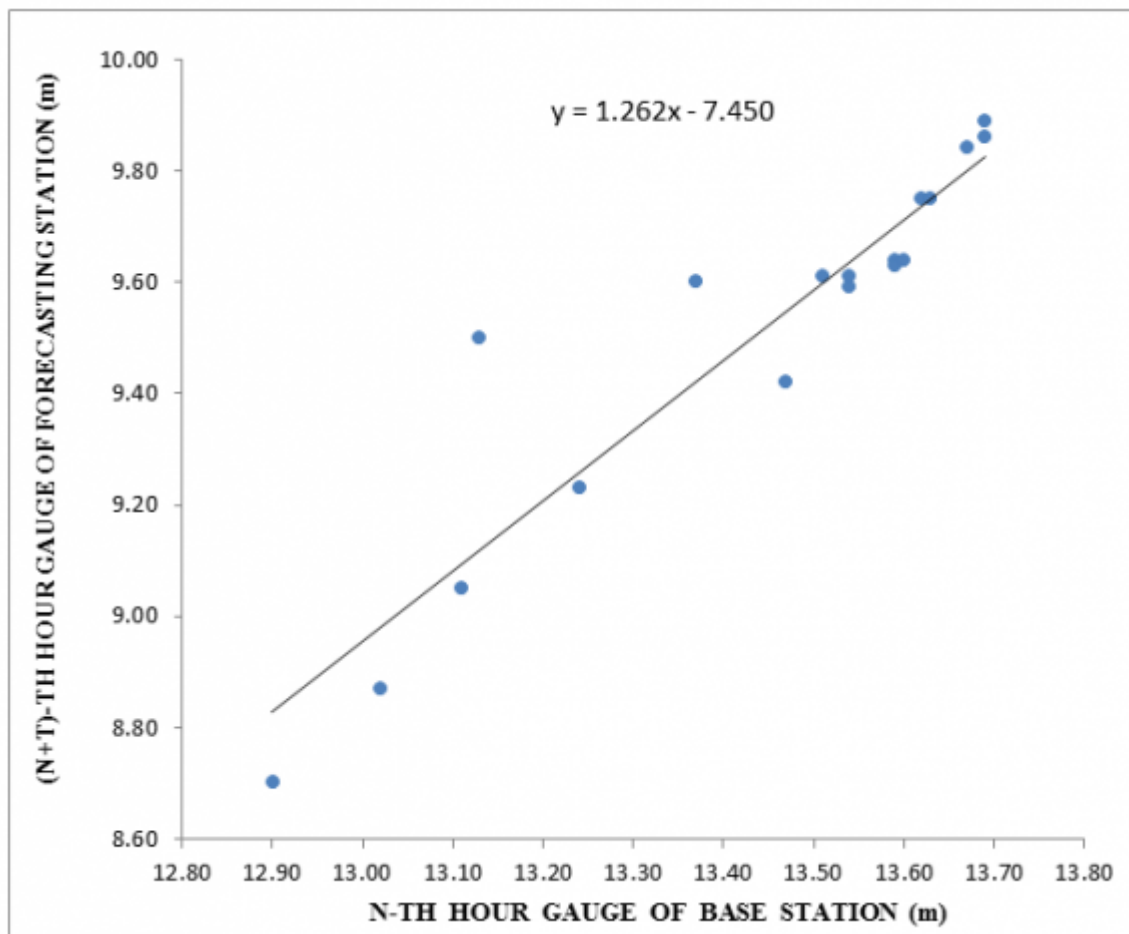


Figure 2:

12::8:10

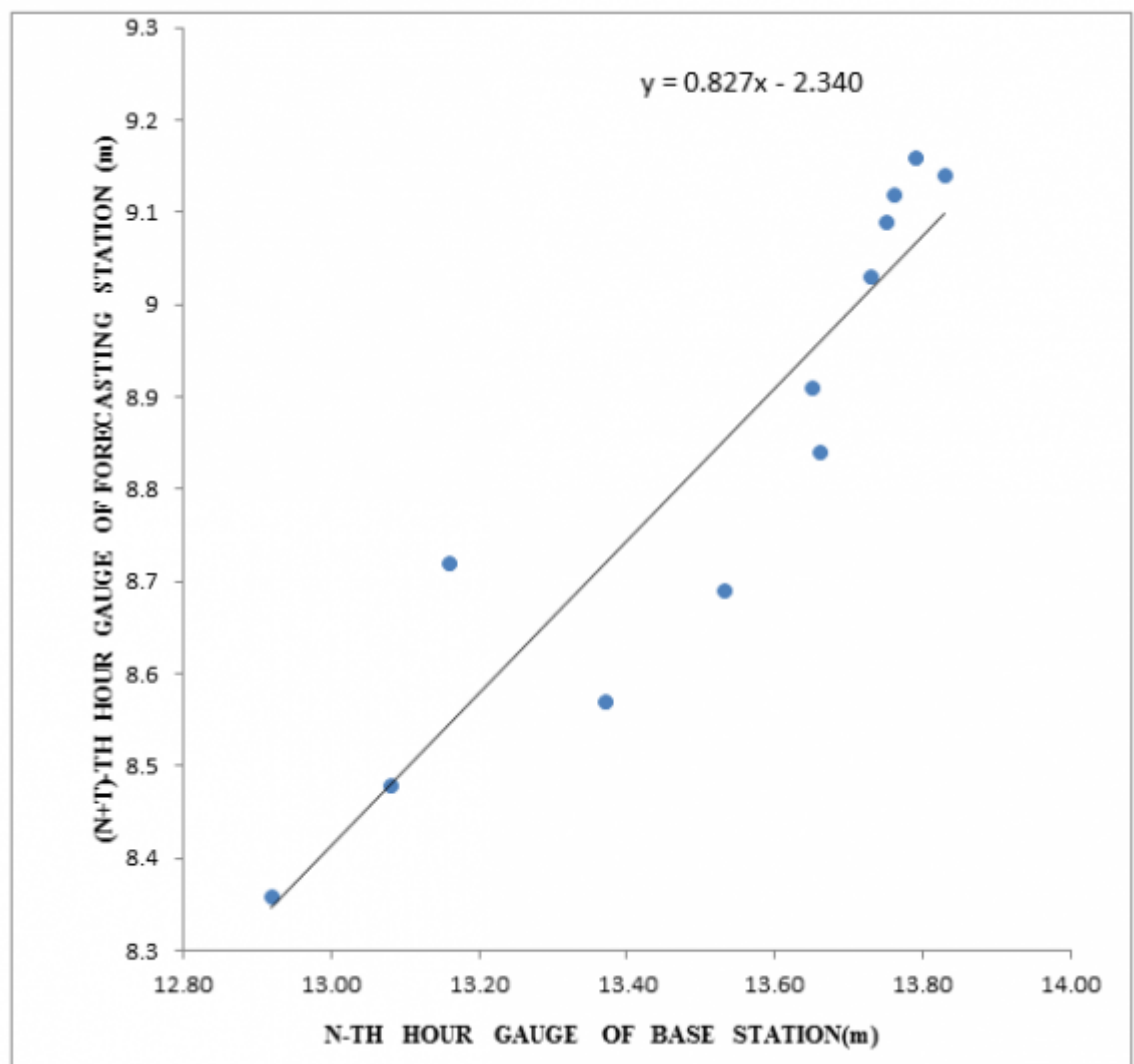


Figure 3: 1 2 Figure : Figure : 8 9Figure : Figure 10 :

1

Figure 4: Table 1 :

2

River	Stations	Danger level (m)
Padma	Hardinge Bridge(Base Station)	14.25
	GoalundoTransi(Forecasting Station)	8.65
Hydrologic year	Travel time (day)	Historical method
2004	1	2
2005	1	2
2006	2	2
2007	1	2
2008	2	2
2009	1	2
2010	2	2
2011	1	2
2012	1	2

[Note: b) Correlations Between Nth hour stage of Base Station and (N+T)th hour Stage of Forecasting Station]

Figure 5: Table 2 :

10		
7.5 8 8.5 9 9.5	7	12.83
(N+T)-TH	12.6	12.83
Hour Gauge of Forecasting Station (m)		N-TH Hour Gauge of Base Station (m)
Hydrological year	Flood Period (day)	Forecasting model $Y = a + bX$
2004	23	$Y = 1.262X - 7.450$
2005	22	$Y = 0.827X - 2.340$
2006	19	$Y = 0.850X - 3.164$
2007	20	$Y = 1.558X - 11.91$
2008	16	$Y = 0.952X + 1.131$
2009	19	$Y = 0.736X - 1.047$
2010	28	$Y = 0.452X + 1.529$
2011	22	$Y = 0.311X + 3.52$
2012	24	$Y = 0.99X - 4.732$

[Note: ? Combined co-relation of N-th hour stage of base station with (N+T)th hour stage of forecasting station has been established as a linear equation. ? The general equation for the flood forecasting for the GoalundoTransi station is $Y = 1.283X - 8.351$.]

Figure 6:

-
- 84 [Reddy ()] *A Textbook of Hydrology*, P J R Reddy . 2005. Laxmi Publications.
- 85 [Mutreja ()] *Applied Hydrology*, K N Mutreja . 1986. Tata McGra-Hill Publishing Company Limited.
- 86 [Rahman et al. ()] 'Design flow and stage computation in the Teesta river'. M M Rahman , D S Arya , N K Goel
87 , A P Dhany . *J. Hydrol. Eng* 2011a. 16 (2) p. .
- 88 [Rahman et al. ()] 'Development of the Jamuneswari Flood Forecasting System: Case Study in Bangladesh'. M
89 M Rahman , N K Goel , D S Arya . *Journal of Hydrologic Engineering* 2012. 17 (10) p. .
- 90 [Chowdhury and Ward ()] 'Hydrometeorological variability in the greater Ganges-Brahmaputra-Meghna basins'.
91 M R Chowdhury , N Ward . *International Journal of Climatology* 2004. 24 (12) p. .