

1 Francisco C. P. Bizarria<sup>1</sup>, Jose W. P. Bizarria<sup>2</sup>, Rogerio Oliveira de Paula<sup>3</sup> and Ariadne  
2 Arrais Cruz<sup>4</sup>

3 <sup>1</sup> Taubate University (UNITAU)

4 *Received: 9 December 2015 Accepted: 1 January 2016 Published: 15 January 2016*

5

---

## 6 Abstract

7 This paper proposes a graphical interface to be integrated into the physical architecture that  
8 has been established to receive a specific process of assembling the front suspension to the  
9 automobile. The physical architecture contains many cells with the necessary means to enable  
10 workers to carry out assemblies of various types of suspensions. In the development of the  
11 graphical interface are considered means for defining the formal sequence of assembly of each  
12 type of suspension in order to increase the production capacity and decrease losses by undue  
13 assemblies. The layout set for virtual components and also the choice of resources are planned  
14 to increase the expressiveness and ease of use of each window contained in the graphical  
15 interface. The validation of the operational features of the graphical interface is obtained by  
16 carrying out practical tests on a prototype that uses the basic elements that are specified in  
17 the aforementioned physical architecture.

18

---

19 *Index terms*— graphical interface, front suspension assembly, automobile.

20 Graphic Interface Applied to the front Suspension Assembly Process for Automobile Francisco C. P. Bizarria  
21 ? , José W. P. Bizarria ? , Rogerio Oliveira de Paula ? & Ariadne Arrais Cruz ?

## 22 1 III. Physical Architecture

23 Figure 1 shows the principal components of a production cell that belongs to the physical architecture that has  
24 been established to receive a specific process of mounting the front suspension to the automobile.

## 25 2 I. Introduction

26 he current scenario of the global economy establishes a condition in which the industries have to invest financial  
27 resources in the production lines to overcome seasonal variations of production demands that are imposed by  
28 consumer markets and also to maintain adequate quality standards, reduce losses in production, minimize lead  
29 times, lower costs and increase flexibility in manufacturing [1].

30 The management of a multinational company to meet the characteristics of the global economy and also keep  
31 the jobs, promoted the study to develop an assembly line of the front suspension for automobiles in order to  
32 supply the Latin American market.

33 The preservation of jobs is the requirement that aims at minimizing the social impact within the community  
34 in which the company operates, and improve local trade and also the infrastructure and also T the and also the  
35 infrastructure as a whole. The very high initial financial cost was another important factor considered to limit  
36 the level of automation for production line.

37 In this context, this work proposes a graphical interface to be integrated into the physical architecture that  
38 has been established to receive a specific process of assembling the front suspension to the automobile.

39 The physical architecture was designed with many cells to meet production line. Each cell contains the  
40 necessary means so that a single worker performs assemblies of various types of suspensions that are produced  
41 by the company.

42 In developing the graphical interface are established every means to assist the worker who uses the resources of  
43 the physical architecture in conducting formal sequence to assemble each type of suspension in order to increase  
44 production capacity and reduce losses due to improper assembly.

### 3 II. Objectives of the Work

The aim of this paper is to present a proposal for a graphical interface to be integrated into the physical architecture that has been established to receive a specific process of assembling the front suspension to the automobile.

Present the first results that were obtained on the practical tests performed with the prototype that adopts the basic elements contained in the aforementioned physical architecture.

### 4 Abstract

The layout set for virtual components and also the choice of resources are planned to increase the expressiveness and ease of use of each window contained in the graphical interface by the worker.

The validation of the operational features of the graphical interface is obtained by carrying out practical tests on a prototype that uses the basic elements that are specified in the aforementioned physical architecture. The acronyms contained in the physical architecture that is shown in Figure 1 have the following meanings: a) Host Computer (H\_C).

### 5 b) Graphical Interface (G\_I). c) Video Line (V\_L). d) Data Communication Line (DC\_L). e) Control Module (C\_M). f) Sensor Line (S\_L). g) Actuators Line (A\_L). h) Box Components (B\_C). i) Visual Signal (V\_S). j) Component Button (C\_B). k) Assembly Time Button (AT\_B).

The function of the Control Module (M\_C) can be performed by a Programmable Logic Controller (PLC) that is equipped with Central Processing Unit (CPU) capable of controlling the inputs and outputs, digital and / or analog, working with wide range amplitudes and frequencies of electrical signals [2].

In Control Module (C\_M) is loaded the software that performs the management of the main activities planned for use of resources of the physical architecture [3]. The software performs all tasks in accordance with the parameter setting sequence which was held for the assembly of each type of suspension, including the activation of alarms and signals required for the process in question.

All control module outputs uses the Actuators Line (A\_L) to control the activation of each Visual Signal (V<sub>1\_S</sub>, V<sub>2\_S</sub>, ..., V<sub>n\_S</sub>) that is installed in each Box Components (B\_C<sub>1</sub>, B\_C<sub>2</sub>, ..., B\_C<sub>n</sub>). The visual signal is activated with the purpose of assisting the worker in identifying which box has the component to be used in the present suspension assembly time. Each box components must store a single type of component that is used during assembly of the suspension.

Control module inputs receive the signals from each Component Button (C<sub>1\_B</sub>, C<sub>2\_B</sub>, ..., C<sub>n\_B</sub>) that is installed in each Box Components (B\_C<sub>1</sub>, B\_C<sub>2</sub>, ..., B\_C<sub>n</sub>), as well as the Assembly Time Button (AT\_B). It is worth mentioning that the Assembly Time Button (AT\_B) is used by the worker to start or stop or ending time count which is used for assembly each suspension.

The main functions of the Host Computer (H\_C) are concentrated in hosting the Graphical Interface (G\_I) and also make the transmission and reception of information that are related to the states of variables in the software installed on the Control Module (C\_M).

The Graphical Interface (G\_I) consists of several windows that should work with the resources available in the operating system of the Host Computer (H\_C).

Within the windows contained in the Graphical Interface (G\_I) are present virtual components that allow: access to the system, make changes, start the system, set the sequence for carrying out the assembly of each type of suspension, activate alarms and visual signals to be used during the production cycle. The Data Communication Line (DC\_L) is the means that the Graphical Interface (G\_I) uses to communicate with the Control Module (C\_M).

### 6 IV. Prototype

A view of the prototype that was produced validate the graphical interface to be integrated on the physical architecture that has been established to receive a specific process of mounting the front suspension for the automobile is shown in Figure 2. The tests with the prototype were concentrated on the evaluation of the operational capacity of each virtual component contained in the graphical inter face. As shown in Figure 2, the main modules provided in the prototype are: graphical interface (G\_I), host computer (H\_C) development system (D\_S), external voltage source (EV\_S) and cable for serial communication (S\_C).The number of modules contained in the prototype is lower when compared to the one defined for the physical architecture of Figure 1, but this condition is not sufficient to cause significant Graphic Interface Applied to the front Suspension Assembly Process for Automobile impact on the validation.The graphical interface (G\_I) used in the prototype was developed through the resources contained in the Supervisory, Control and Data Acquisition (SCADA)

---

100 system, that is called by Elipse SCADA [4] The host computer (H\_C) used in practical tests is the portable type  
101 (notebook) with 64-bit, Intel architecture and Microsoft® Windows 7 operating system

102 The development system (D\_S) chosen for the prototype is called by CUBLOC STUDY BOARD 1, as the  
103 same is capable of performing the cycle as well as the processing functions that are typical for Programmable Logic  
104 Controller (PLC), and can generate and receive electrical signals that are related to the sensors and actuators  
105 contained in the physical architecture [5] The external voltage source (EV\_S) has the function to provide electric  
106 power that is consumed for operating the development system (D\_S) in direct current

107 The cable for serial communication (S\_C) is the physical means by which the development system (D\_S)  
108 and the graphical interface (G\_I) transfer data with each other, through communication protocols defined by  
109 Electronic Industries Alliance (EIA).

## 110 7 a) Management software

111 The information management software is designed to meet the practical tests performed with the prototype. The  
112 software considers a sequence specific activity that the worker must perform to assemble a kind of suspension.

113 Each step in the assembly sequence is recognized by development system (D\_S) by stimuli that are applied to  
114 the digital buttons (D\_B), the digital key (D\_K) and potentiometers (A\_P), according to the details presented  
115 in Figure 3 . In response to the stimuli applied to the buttons and switches, the graphical interface (G\_I) presents  
116 the pictures and other details that are related to each phase of the suspension assembly sequence.

117 The analytical flowchart containing a specific sequence of actions foreseen in the management software that  
118 was used in carrying out practical tests of this work is shown in Figure ?? .

## 119 8 Graphic Interface Applied to the front Suspension Assembly 120 Process for Automobile

121 The acronyms contained in the flowchart shown in Figure ?? have the same meanings as those shown in the  
122 prototype view (Figure 2).

## 123 9 b) Graphical interface

124 The main function of the graphical interface (G\_I) is concentrated in presenting visual signals in sufficient  
125 expressivity to assist the worker in the task of fetching items and also to assemble every suspension component.  
126 The main window of this interface is shown in Figure 5. It is worth mentioning that the figures of the suspension  
127 components used in the practice tests were obtained from the system called AUTODESK® [6].

128 The window shown in Figure 5 has two columns of virtual objects. The Column-1 is divided into groups which  
129 are called: FETCH, DETAILS and UTILITIES.

## 130 10 Column-1

131 Column-2 The information presented on the mentioned group are based on parameter values and obtained from  
132 the host computer (H\_C).

133 It is worth mentioning that Start Time and Quantity Assembled display information which are related to the  
134 time elapsed from the activity start time of the worker and the amount of suspensions assembled at this time.

135 The Column-2 has virtual objects related to the type of suspension, the component to be assembled, the  
136 number of components assembled on the table, the assembly time for each component, the suspension assembly  
137 time, the component assembly signaling and also signaling for assembly the suspension.

138 The Due to the importance for the successful operation of the graphical interface (G\_I), the virtual object  
139 named by the Suspension Assembly View occupies the largest area; it has the function to show the figures  
140 represented in three dimensions that are related to the components mounted on the table.

## 141 11 c) Practical tests

142 The procedures adopted in carrying out practical tests related to the graphical interface (G\_I) that is proposed  
143 in this paper are as follows: a) Make the connections of the modules contained in the prototype is shown in Figure  
144 2. b) Develop software in ladder language for development system (D\_S), which follows the steps contained in  
145 the flowchart shown in Figure ??. c) Prepare graphical interface containing the window shown in the Figure ??.  
146 By means of the inputs contained in the development system (D\_S) that is shown in Figure 3, the set of stimuli  
147 was applied to simulate the assembly sequence of the suspension in the physical architecture shown in Figure 1.

148 As consequence of applied stimuli was observed that the graphical interface (G\_I) at the host computer (H\_C)  
149 is able to properly display the visual signals expected for that type suspension assembly. Some of the stimuli were  
150 applied with the goal of simulating an incorrect sequence of assembly in order to evaluate the system's ability to  
151 identify this situation, which actually occurred.

152 The results of the practical tests were positive because the graphical interface (G\_I) was able to display all  
153 the virtual components in the correct sequence to assist the worker in the assembly task of the front suspension  
154 to the automobile.

155 It is very important to emphasize that the simulations with the incorrect assembly of components for the  
156 suspension were identified by the graphical interface (G\_I), which allows the worker to correct and execute the  
157 exact sequence.

### 158 12 V. Conclusions

159 Satisfactory results observed in practical tests show that the proposal presented in this paper is feasible and can  
160 be carried out for the application to which it is intended. The objectives planned for this phase of the study  
161 were achieved, especially with regard to propose a graphical interface to assist the development of the activities  
162 performed by the worker in a physical architecture that was established to receive a specific process of assembling  
163 the front suspension to the automobile.

164 The graphical interface when integrated into a real physical system may contribute to increase production, to  
165 reduce the suspension assembly time, to minimize errors and also facilitate the implementation of activities by  
166 the worker.

167 The layout adopted, the quantity and clarity of the virtual objects provide an intuitive and meaningful  
environment for the worker carry out the suspension assembly. <sup>1</sup>



1

Figure 1: Fig. 1 :



2

Figure 2: Fig. 2 :

168

---

<sup>1</sup>© 2016 Global Journals Inc. (US)

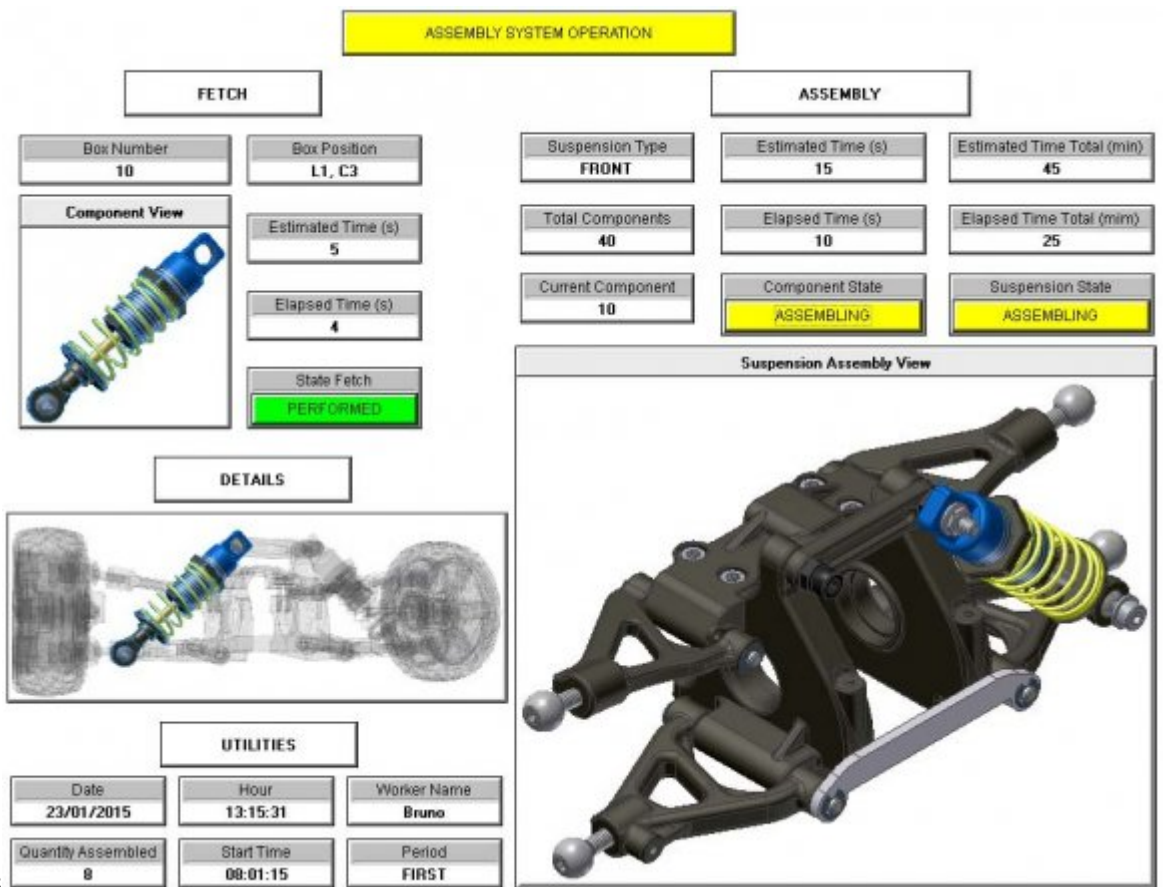


Figure 3:



3

Figure 4: Fig. 3 :



4420162016

Figure 5: FFig. 4 : 4 2016 F© 2016



- 
- 169 [ Global Journal of Researches in Engineering] , *Global Journal of Researches in Engineering*  
170 [Cubloc? and Plc ()] , Cubloc? , Plc . <[http://www.comfiletech.com/content/cubloc/  
171 cublocmanual.pdf](http://www.comfiletech.com/content/cubloc/cublocmanual.pdf)>.Dateofaccess:03/07/2015 *Comfile Technology Inc* 2015.
- 172 [ F ()] , F . *Global Journals Inc* 2016.
- 173 [Graphic Interface Applied to the front Suspension Assembly Process for Automobile com/docs/chapters/Industrial\_Internet]  
174 *Graphic Interface Applied to the front Suspension Assembly Process for Automobile*  
175 *com/docs/chapters/Industrial\_Internet*, 21/03/2015.
- 176 [Inc ()] Autodesk® Inc . *Autodesk® Inventor? Professional*, 2009. 2010.
- 177 [Evans and Annunziata (2012)] *Industrial Internet: Pushing the Boundaries of Minds and Machines*, P C Evans  
178 , M Annunziata . <<http://www.ge> November 26, 2012.
- 179 [Bryan and Bryan ()] *Programmable Controllers, Theory and Implementation, Second Edition, An Industrial*  
180 *Text Company Publication*, L A Bryan , E A Bryan . 1988. Atlanta -Georgia -USA.
- 181 [Bolton ()] *Programmable Logic Controllers, Fourth Edition*, W Bolton . 2006. Newnes, Copyright©: Elsevier.
- 182 [Elipse ()] *Tutorial, version 2.29*, Scada Elipse . <[http://downloads.elipse.com.br/port/download/  
183 scada/v2.29/b151/scadatutorial\\_br.pdf](http://downloads.elipse.com.br/port/download/scada/v2.29/b151/scadatutorial_br.pdf)>.Dateofaccess:15/05/2015 2015.