Artificial Intelligence formulated this projection for compatibility purposes from the original article published at Global Journals. However, this technology is currently in beta. *Therefore, kindly ignore odd layouts, missed formulae, text, tables, or figures.*

The Mineral Flotation Overall Performance Increase by the Improvement of Recycling

A. Alouani

Received: 12 December 2016 Accepted: 31 December 2016 Published: 15 January 2017

6 Abstract

1

2

3

4

 $_{7}$ Introduction-The use of flotation process for the mineral enrichment is increasing to satisfy

8 the client and to match his evolving requirements. The consumption mode of reagent and

⁹ energies greatly impacts the global cost of mineral enrichment by flotation, and is a

¹⁰ determinant factor in the overall performance. To improve the quality of products, we

¹¹ developed new wash and flotation processes of minerals. Their enrichment knows a big

¹² development and arouses a particular interest, which is motivated by the increasing product's

¹³ demand and by the need to handle the enrichment of minerals that cannot be done by the

¹⁴ conventional treatment processes. The use of these processes on an industrial scale and its

¹⁵ integration in the installations and the factories achieved within the framework of mining

¹⁶ industries allowed to: ? Rationalize the mineral deposits exploitation and to increase their

¹⁷ durations ? Value all the minerals ? Improve the productivity ? Extend the deposits life

18 expectancy in exploitation ? Produce marketable and diverted qualities of minerals ? Ensure

¹⁹ the integration of the various mineral deposits exploitation in the mining industries

²⁰ development project based on the sustainable development.

21

Index terms—
The Mineral Flotation Overall Performance Increase by the Improvement of Recycling A. Alouani ? , A.
Arbaoui ? & K. Benkhouja ? I. Introduction he use of flotation process for the mineral enrichment is increasing
to satisfy the client and to match his evolving requirements. The consumption mode of reagent and energies
greatly impacts the global cost of mineral enrichment by flotation, and is a determinant factor in the overall
performance.

To improve the quality of products, we developed new wash and flotation processes of minerals. Their enrichment knows a big development and arouses a particular interest, which is motivated by the increasing product's demand and by the need to handle the enrichment of minerals that cannot be done by the conventional treatment processes.

The use of these processes on an industrial scale and its integration in the installations and the factories achieved within the framework of mining industries allowed to: Ores valorization during all the value chain follows an integrated industrial process since the extraction of the rock, beneficiation, and transportation until

the industrial valorization.

The results obtained on the industrial scale are conclusive, viable and confirm the results obtained in laboratories and on pilots scale. Using these new processes leads to:

³⁸ 1 Production of high ores quality

39 Author ?: OCP Khouribga, Morocco, University Chouaib Doukkali, Faculty of Sciences, EL Jadida, Morocco.

e-mail: A.ALOUANI@ocpgroup.ma Author ? ?: University Chouaib Doukkali, Faculty of Sciences, EL Jadida,
Morocco.

42 2 ?

Experience is capitalized and integrated in the mining industries projects under the sustainable developmentframework

In order to improve the flotation process overall performance, several flow recycling case studies were considered. The reduction of the recycling ratio increases the specific consumption of Flotation reagents, however its progressive increment reduces the need for reagents up to an optimal level. Moreover, any increase results in an accumulation of fine particles in the circuits, which causes saturation and a reduction of the production capacity in the Flotation unit.

According to the "AA" curve below, the industrial optimization led to a remarkable reduction of the specific consumptions for the same raw product profile and for the same level of the production capacity. ? Industrial application

⁵³ 3 Optimized flotation process

After the laboratory tests, come the tests on pilot scale phase. These ones are needed to confirm the results obtained in the laboratory and assess the extrapolation effects parameters on pilot scale. This leads to the determination of stabilization and process optimization parameters and several recycling flow cases.

⁵⁷ 4 Preparation of process tender

58 5 Fig. 3: Preparation of process tender

The optimization is based on the process model of mineral enrichment by washing flotation with a calibration on the experimental results and the industrial units' returns of experiments.

⁶¹ Vigilance points are to observe, especially the recycling impact on the accumulation of fine particles and ⁶² circuits' saturation, which leads to an optimal point of recycling flows.

63 6 Conditionning phase

⁶⁴ 7 Reagents preparation and injection

65 **8 J**

The curve "AA" below is based on the optimization test result which helps determine the optimum recycling point (optimal operating point). This resolves the dilemma of "increasing the recycling flow in order to recuperate a bigger quantity of reagents. This process will ultimately lead to a bigger saturation of the circuits which can lead to a capacity decrease". This is more efficient with the use of foam flotation because the generation of abundant foam is generally quite a challenge spread in the mining industry.

There are many ways of foam flotation, here are some identified: Reduction in the reagents consumption Reduction of the recycling ratio increases the specific consumption of Flotation reagents, how ever its progressive

 73 increment reduces the need for reagents up to an optimal level. Moreover, any increase results in an accumulation

of fine particles in the circuits, which causes saturation and a reduction of the production capacity in the Flotation

75 unit.

According to the "AA" curve above, the industrial optimization led to a remarkable reduction of the specific consumptions for the same raw product profile and for the same level of the production capacity.

 $^{^{1}}$ © 2017 Global Journals Inc. (US)

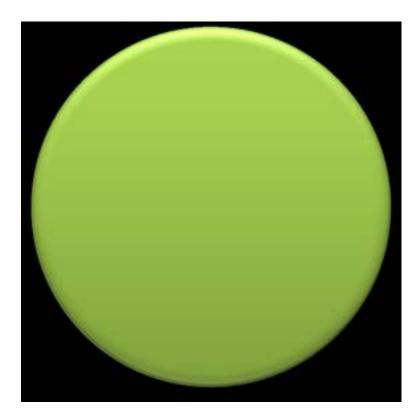


Figure 1: ?




Figure 2: T








Figure 4: ?Fig. 4 :

