



GLOBAL JOURNAL OF RESEARCHES IN ENGINEERING: E
CIVIL AND STRUCTURAL ENGINEERING
Volume 17 Issue 4 Version 1.0 Year 2017
Type: Double Blind Peer Reviewed International Research Journal
Publisher: Global Journals Inc. (USA)
Online ISSN: 2249-4596 & Print ISSN: 0975-5861

Parametric Study of the Stabilization of Sloped Surfaces Bedding with Geotextiles

By Hamid Fathi Shoob, Amin Nooralizadeh & Hamed Zamenian

Department of Civil Engineering University

Abstract- One of the most important applications of geotextiles is as a reinforcement to increase the stability and strength in soil slopes as well as to stabilize slopes which would be unstable without reinforcement. This paper presents the results of a parametric study which investigated the effects of various factors, such as the number of reinforcement layers and a dike's slope angle, on the dike's safety factor. Using PLAXIS software and the finite element method, the maximum final displacement, maximum horizontal displacement, maximum vertical displacement, and maximum shear strain which are created in a dike were examined. The results show that as the number of reinforcement layers was increased, the dike's safety factor increased and the maximum final displacement, maximum horizontal displacement, maximum vertical displacement and maximum shear strain created in the dike decreased. Furthermore, as the dike's slope angle increased, the safety factor of the dike's stability decreased and the maximum final displacement, maximum horizontal displacement, maximum vertical displacement, and maximum shear strain created in the dike increased.

Keywords: *geotextile, reinforcement, finite element, dike.*

GJRE-E Classification: *FOR Code: 290804*



Strictly as per the compliance and regulations of:



© 2017. Hamid Fathi Shoob, Amin Nooralizadeh & Hamed Zamenian. This is a research/review paper, distributed under the terms of the Creative Commons Attribution-Noncommercial 3.0 Unported License (<http://creativecommons.org/licenses/by-nc/3.0/>), permitting all non commercial use, distribution, and reproduction in any medium, provided the original work is properly cited.

Parametric Study of the Stabilization of Sloped Surfaces Bedding with Geotextiles

Hamid Fathi Shoob ^α, Amin Nooralizadeh ^σ & Hamed Zamenian ^ρ

Abstract- One of the most important applications of geotextiles is as a reinforcement to increase the stability and strength in soil slopes as well as to stabilize slopes which would be unstable without reinforcement. This paper presents the results of a parametric study which investigated the effects of various factors, such as the number of reinforcement layers and a dike's slope angle, on the dike's safety factor. Using PLAXIS software and the finite element method, the maximum final displacement, maximum horizontal displacement, maximum vertical displacement, and maximum shear strain which are created in a dike were examined. The results show that as the number of reinforcement layers was increased, the dike's safety factor increased and the maximum final displacement, maximum horizontal displacement, maximum vertical displacement and maximum shear strain created in the dike decreased. Furthermore, as the dike's slope angle increased, the safety factor of the dike's stability decreased and the maximum final displacement, maximum horizontal displacement, maximum vertical displacement, and maximum shear strain created in the dike increased.

Keywords: geotextile, reinforcement, finite element, dike.

I. INTRODUCTION

Reinforced soil and face walls have received a great deal of attention in recent years in urban construction and the related road and rail networks for trench stability as well as for access to dikes (Skinner and Row 2006). Geosynthetics are widely used as reinforcement components due to their many advantages, such as ease of use and economic benefits (Leshchinsky and Han 2004). Two of its common applications are soil reinforcement and securing the stability of dikes. Geosynthetics can prevent the extension of rupture levels by increasing the tensile resistance of the soil and by creating friction between the reinforcement and the soil to increase the stability and safety of dikes (Hatami and Bathurst 2006).

Many studies have been carried out to determine the geotechnics of reinforced sloped dikes in the last 25 years. Vidal (1969) proposed using dike reinforcement mechanisms to solve many geotechnical issues. On the other hand, using the finite element

method in simulating dikes reinforced by polymer materials such as geosynthetics, under static and dynamic loads are capable of producing acceptable results as well. For example, using the finite element method, Ling et al. (2004) analyzed a face wall reinforced with geosynthetics and compared it to the experimental results, which suggested that the finite element method was highly accurate. Siavoshnia et al. (2010) evaluated the performance of a dike reinforced by geotextile fibers that was built on soft clay soil and modeled it using PLAXIS 2D. Their results show that a decrease in the dike's slope and its height from the bedding, as well as an increase in the hardness of the geotextile layers, led to a decrease in the dike's settlement. George and Hataf (2000) using PLAXIS, modelled the foundation of a soil barrier that was comprised of a column of sandy soil reinforced by geotextile layers. The results of their study showed that the geotextile layers led to an increase in the load-bearing capacity of the soil; however, using this system in very soft soils that contain organic materials resulted in decreased settlement of the foundation. Naini and Mirzakhani (2008) investigated the effect of strengthening granular soil with geotextiles and found that the load-bearing capacity of granular soils reinforced by geotextiles significantly increased the load-bearing capacity in the normal case. Ghaderi et al. (2005) examined the parameters that influence sloped fills reinforced by geotextile fibers. Their investigations showed that the stress distribution in the fill height was independent of the length of the geotextile layers. They also found that an increase in the length and number of geotextile layers led to an increase in the dike's safety factor against sliding. Noorzad and Mirmoradi (2010) investigated clay soils reinforced by geotextiles. Their experimental results showed that when the soil moisture increased, the soil's maximum tolerable stress decreased for both the "with" and "without" geotextile cases, but the axial strain increased and caused a rupture. Furthermore, an increase in the soil compaction resulted in increased resistance and soil axial strain in both cases.

II. MATERIALS AND MODELING SPECIFICATIONS

In the parametric study presented in this paper, the dike's slope height was 15 meter with the dike's

Author α: Master Graduate, Department of Civil Engineering Mazandaran Industrial High-Education Institute, Iran.

Author σ: Ph.D. Candidate, Department of Civil Engineering University of Qom, Qom, Iran.

Author ρ: Ph.D. Candidate Lyles School of Civil Engineering Purdue University, West Lafayette, IN, U.S.A. e-mail: hzamenia@purdue.edu

materials in sand; and the soil layer beneath the dike (natural earth layer) was 8 m thick in soft clay. The length of the dike was 10 meter. In the first case and in order to consider the effect of the number of reinforcement layers, geotextile layers with equal lengths of 7 meter and variable vertical distances of 0.5, 0.6, 0.75 and 1 meter, were placed. The dike's slope angle was 1H:1.8V (61 degrees) in the first case. In the second case, in order to consider the effect of the dike's slope angle, geotextile layers of equal lengths of 7 m and equal vertical distances of 0.5 meter were placed. The dike's slope angle also was variable in this case, which was considered at 1H:1V (45 degrees), 1H:1.5V (56.3 degrees), 1H:1.8V (61 degrees) and 1H:3V (71.5 degrees). It is worthwhile to note that the dike being analyzed was subject to the effect of static loading (dike's weight). PLAXIS 8.5 software was used for modelling and the Mohr-Coulomb behavioral model was used for the intended materials.

PLAXIS is an advanced finite element software that has many applications for analyzing deformations and sustainability in geotechnics projects. In two-dimensional analyses, it is possible to choose two types of six-node and 15-node triangular elements. In the study presented in this paper, in order to achieve more accuracy in calculating stresses and strains, the 15-node elements were chosen. In six-node elements, the element displacement approximation function is considered of the second order; and the hardness matrix of this type of element is obtained by using three stress points. On the other hand, in triangular 15-node elements, the displacement approximation function is considered of the fourth order; and its stress points for determining the hardness matrix are considered as 12 points. Fig.1 shows the positions of the displacement points and stresses in these two types of elements (Brinkgreve and Vermeer 1998).

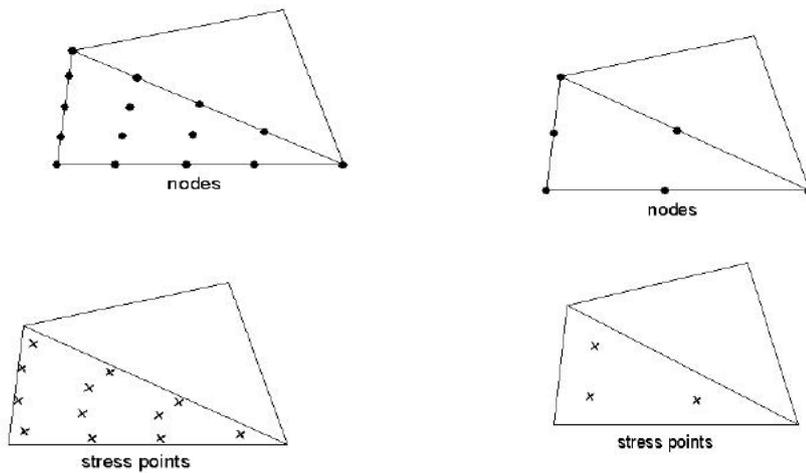


Fig. 1: Position of Nodes and Stress Points in Soil Elements

Also, in Figure 2, the geometry of the dike of interest and its netting are shown in the non-reinforced case.

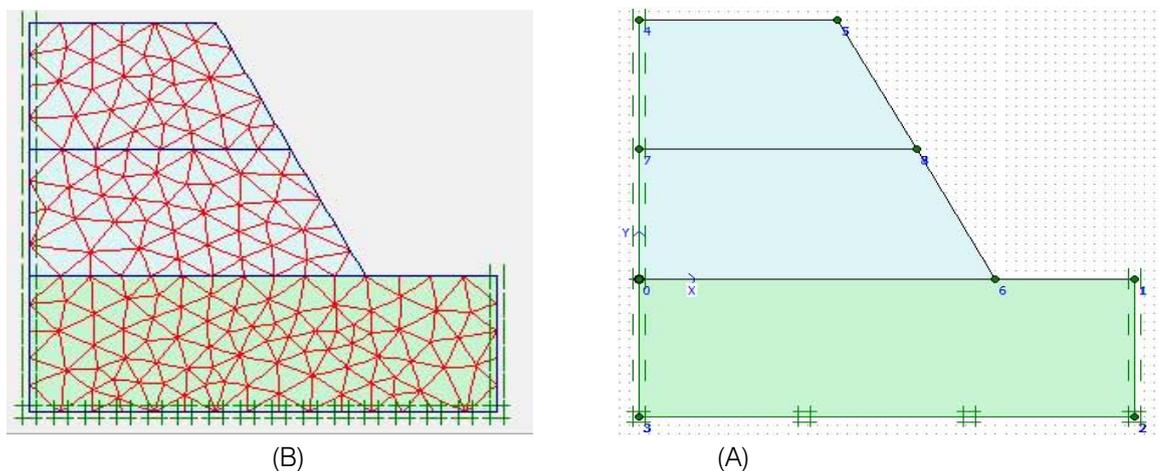


Fig. 2: A) Dike's Geometric Model; B) Dike's Netting

Table 1 describes the specifications of the dike in this study, which was reinforced by geotextiles and the soil layer beneath (natural earth layer).

Table 1: Specifications of Reinforced Dike and its Soil Layer Beneath.

Parameter	Name	sand	clay	unit
Model of material behaviour	Model	Mohr-Coulomb	Mohr-Coulomb	--
Type of material behaviour	Type	Drained	Drained	--
Soil unit weight above p.l.	γ_{wet}	17	15	KN/m ³
Soil unit weight below p.l.	γ_{sat}	21	18	KN/m ³
Horizontal permeability	K_x	0.5	10^{-4}	m/day
Vertical permeability	K_y	0.5	10^{-4}	m/day
Young's modulus	E_{ref}	30000	3400	KN/m ²
Poisson's ratio	ν	0.3	0.33	--
Cohesion	C	1	5.5	KN/m ²
Friction angle	ϕ	34	24	degree
Dilatancy angle	Ψ	4	0	degree
Interface reduction factor	R_{inter}	0.8	--	--
Tensile stiffness of reinforcement	EA	1000	--	KN/m

Since the reinforcing material of the dike was a geotextile, it was necessary to specify the geotextile in PLAXIS, which then considers the geotextile as a tensile element and is represented as an EA parameter (axial stiffness) in the software. Note that this value is different for different types of geotextiles; therefore, in order to consider their effect on the safety factor, maximum total displacement, maximum horizontal displacement, maximum vertical displacement and maximum shear strain created in the dike, the geotextile tensile stiffness was set at 1000 KN/m. The underground water level was located at a depth of 8 m from the natural ground level (at the bottom of the clay layer).

III. CALCULATIONS AND ANALYSIS OF RESULTS

As previously mentioned, the objective of the presented study was to investigate the effect of the following parameters of the dike on the safety factor: the number of reinforcement layers, the dike's slope angle, the maximum total displacement, maximum horizontal displacement, maximum vertical displacement and maximum shear strain created in the dike. Each parameter is discussed below.

a) Effect of the Number of Reinforcement Layers

The numbers of reinforcement layers were set at 15, 20, 25, and 30 in this experiment to determine this parameter's effect on the safety factor, the maximum total, horizontal, and vertical displacement and the

maximum shear strain created in the dike when the tensile stiffness of the reinforcement layers was 1000 KN/m.

The type of netting on the reinforced dike when the number of reinforcement layers was 15 as shown in Figure 3 and Figure 4 indicates the changes in the safety factor based on the number of reinforcement layers. It is obvious that when the number of reinforcement layers increased, the dike's safety factor increased. Also, it can be seen that when the number of reinforcement layers was 15, the safety factor was less than 1 and the dike was unstable. For the other quantities of reinforcement layers, the safety factor was always greater than 1 and the dike was stable. In fact, with an increase in the number of reinforcement layers, a probable sliding surface gradually moved away from the slope wall (i.e., as the number of reinforcement layers increased, the rigidity of the reinforced area increased).

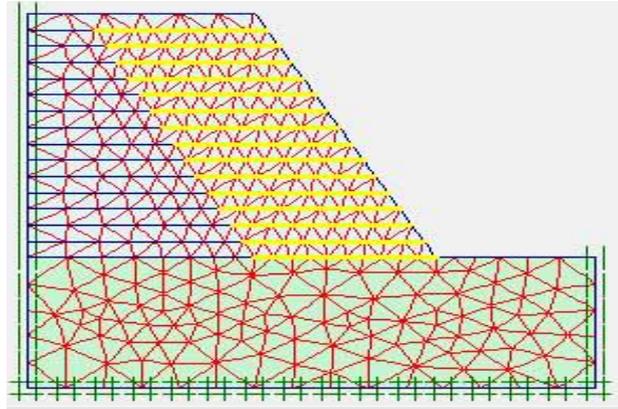


Fig. 3: Netting of the Reinforced Dike (the Number of Reinforcement Layers is 15)



Fig. 4: Changes in Safety Factor vs. the Number of Reinforcement Layers

Also, Figure 5 shows that the extent of displacement decreased as the number of reinforcement layers increased. It can be seen that the maximum total displacement was more than the horizontal and vertical displacements and the maximum horizontal displacement was the least amount. In addition, when the number of reinforcement layers increased, the amount of tolerable stress in the dike increased and its deformation decreased. It is obvious from the figure that when the distance between the geotextiles decreased (an increase in layers), the maximum displacement decreased. Furthermore, when the number of layers was 15 (layers distance was 1 m), the maximum displacement was large; but when the number of layers was 30 (layers distance was 50 cm), the maximum displacement decreased. This occurred because, in the case of relatively large distances between geotextiles, the stress between layers did not transmit well and the decrease in displacements (settlements) therefore was negligible compared to the case of small distances between layers. A 50 cm distance (the number of layers was 30), led to an ideal

case of decreased displacement (settlement) in the dike because a lock was created between the soil particles as well as between the soil and the geotextile layers, which resulted in stress transmission from the upper to the lower layers, thereby greatly decreasing the dike's displacements.

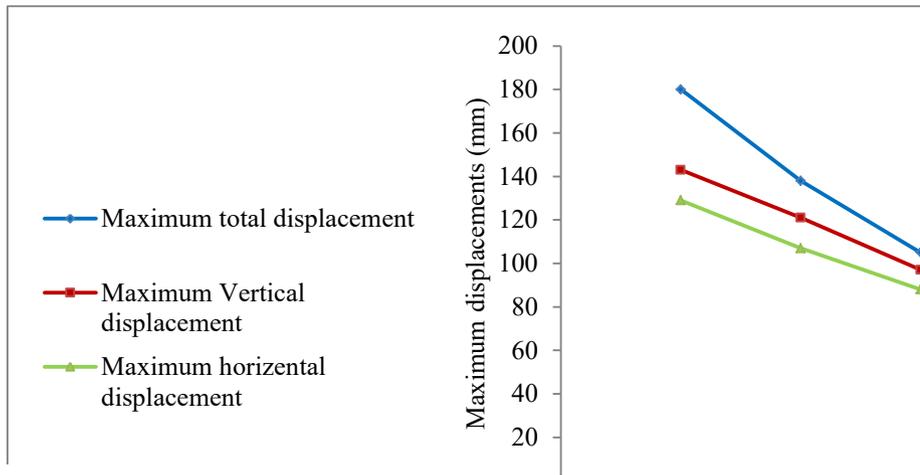


Fig. 5: Maximum Displacements Occurring in the Dike

Figure 6 shows the maximum shear strain caused in the dike vs. the number of reinforcement layers. It can be seen that when the number of reinforcement layers increased, the amount of maximum shear strain in the dike decreased. Also, the maximum

shear strain caused in the dike occurred when the number of reinforcement layers was 15, and the least shear strain caused in the dike was when the number of layers was 30.

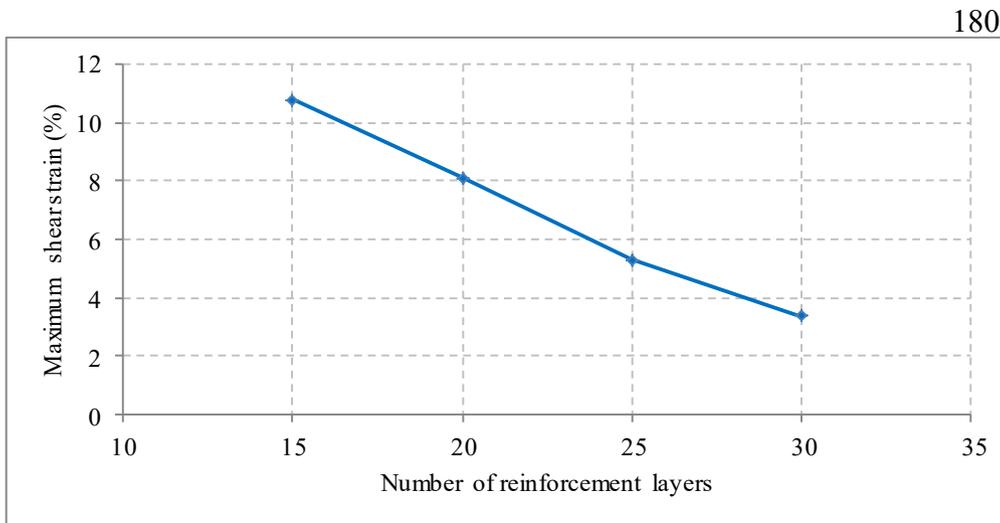


Fig. 6: Maximum Shear Strain Occurring in the Dike

b) Examining the Effect of the Dike's Slope Angle

In this section, the effect of the dike's slope angle, which in this study were 45, 56.3, 61 and 71.5 degrees, on the safety factor, maximum final displacement, horizontal and vertical displacements, and maximum shear strain caused in the dike when the tensile hardness of the reinforcement layers was 1000 kN/m. Also, in Figure7, the type of netting for the reinforced dike when the slope angle was 45 degrees is shown. The changes in the safety factor vs. the dike's slope angle are shown in Figure 8. It can be seen that when the slope angle increased, the safety factor

decreased. Also, when the dike's slope angle was 1H: 3V (71.5 degrees, the safety factor was less than 1 and the dike was unstable. In the other cases, the safety factor was greater than 1 and the dike was stable. In fact, it should be noted that the slope angle proved to be a very important parameter insofar as the extent of maximum tensile force caused in the reinforcement layers; and the milder the slope was, the less the axial force created in the reinforcement.

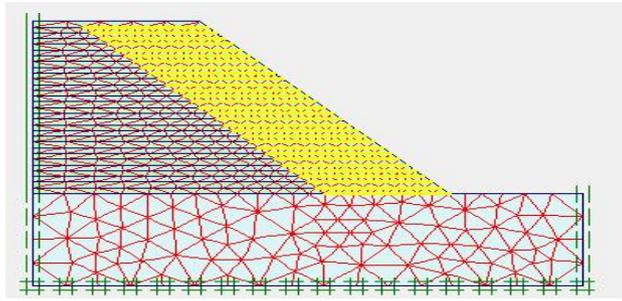


Fig. 7: Netting of the Reinforced Dike (Dike's Slope Angle is 45 Degrees)

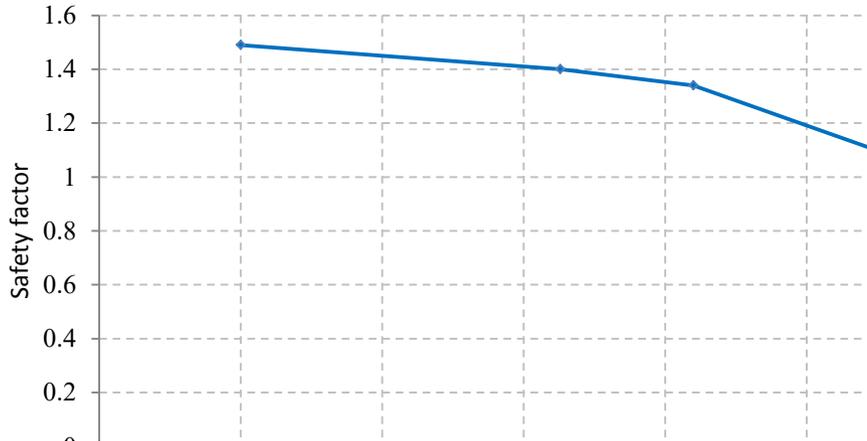


Fig. 8: Changes in Safety Factor vs. the Dike's Slope Angle

Figure 9 shows the maximum displacements created in the dike. It can be seen that when the dike's slope angle decreased, the maximum displacement created in the dike increased. Also, the least displacement of the dike was related to the maximum horizontal displacement; and when the dike's slope angle was 45 degrees, the least horizontal displacement

was created. Moreover, since the maximum horizontal displacement commonly occurs at slope clevises, the milder the slope, the less the tuck of the soil was at clevises. A decrease in the dike's slope angle therefore had a greater effect on the maximum horizontal displacement of the dike.

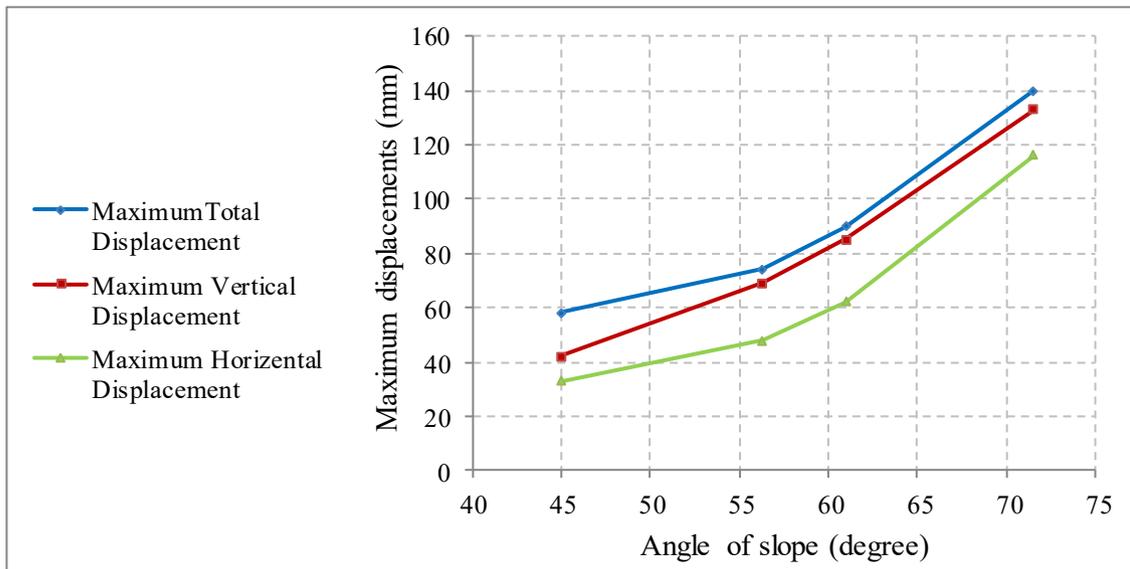


Fig. 9: Maximum Displacements Created in the Dike

Figure 10 shows the maximum shear strain caused in the dike vs. the dike's slope angle. It is easily seen that when the dike's slope angle decreased, the maximum shear strain created in the dike increased.

Also, the least shear strain occurred when the dike's slope angle was 45 degrees, and the maximum shear strain occurred when the slope angle was 71.5 degrees.

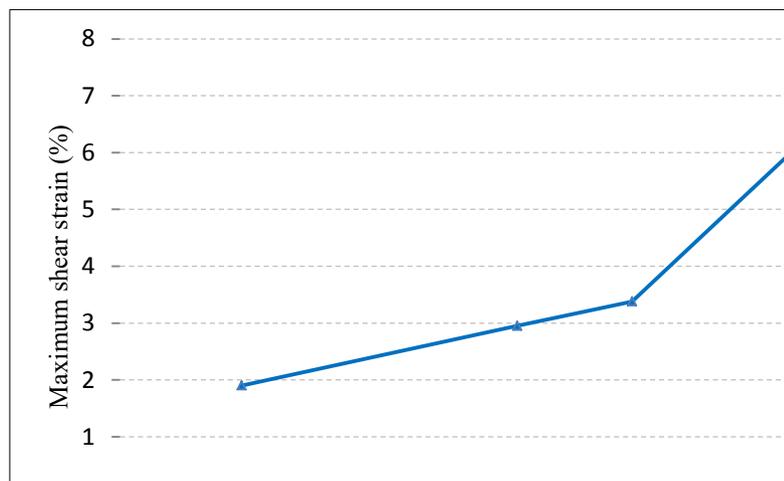


Fig. 10: Maximum Shear Strain Created in the Dike

IV. CONCLUSIONS

The conclusions of the study presented in this paper can be summarized as follows:

1. Using geotextile layers can lead to improvement in a dike's performance; and more specifically, a dike reinforced by geotextiles has less slide and settlement than a dike without geotextile reinforcement.
2. With an increase in the number of reinforcement layers, the safety factor of a dike against slides increases insofar as the maximum total and the horizontal and vertical displacements, and the maximum shear strain created in the dike decreases.
3. With an increase in the number of reinforcement layers, a probable sliding surface gradually moves away from a slope wall and the rigidity of the reinforced area increases.
4. With an increase in a dike's slope angle, the dike's safety factor against a slide decreases; and the maximum total and the horizontal and vertical displacements as well as the maximum shear strain created in the dike increase.
5. The optimal case for the dike in this study occurred when the number of reinforcement layers was 30 and the dike's slope angle was 45 degrees.

REFERENCES RÉFÉRENCES REFERENCIAS

1. Skinner, G. D. and Row, R. K. (2006), "Design and Behaviour of Geosynthetic Reinforced Retaining Wall and Bridge Abutment on a Yielding Foundation, Geotextiles and Geomembranes," Vol 24, pp 234-260.
2. Leshchinsky, D. and Han, J. (2004), "Geosynthetic Reinforced Multitiered Walls," *Journal of Geotechnical and Geoenvironmental Engineering ASCE*, Vol 130, No. 12, pp 1225- 1235.
3. Hatami, K. and Bathurst, R.J. (2006), "A Numerical Model for Reinforced Soil Segmental Walls Under Surcharge Loading," *Journal of Geotechnical and Geoenvironmental Engineering*, Vol 132, No. 6, pp 673-684.
4. Vidal, H. (1969), "The Principles of Reinforced Earth," *Highway Research, Rec.*, No. 282, pp 1-16.
5. Ling, H.I. and Kaliakin, N. and Liu, H. and Leshchinsky, D. (2004), "Analyzing Dynamic Behavior of Geosynthetic-Reinforced Soil Retaining Walls," *Journal of Engineering Mechanics*, Vol 13, pp 911-921.
6. Siavoshnia, M. and Kalantari, S.H. and Shakiba, A. (2010), "Assessment of Geotextile Reinforced Embankment on Soft Clay Soil," *The 1st International Applied Geological Congress*, Department of Geology, Islamic Azad University, Mashad Branch, Iran, 26-28 April 2010.
7. George, H. and Hataf, S. (2000), "Bearing Capacity of Footings on Sand Slopes Reinforced With Geotextile," *Journal of Material in Civil Engineering*, Vol 13, pp 217-226.
8. Naeini, S.A. and Mirzakhani, M. (2008), "The Effect of Geotextile and Grading on the Bearing Ratio of Granular Soils," *Journal of Material in Civil Engineering*, Vol 13, pp 233-255.

9. Qhaderi, R. and Vafaeian, M. (2005), "A Parametric Study of the Behavior of Geosynthetic Reinforced Soil Slopes, "International Journal of Engineering, Vol 18, N04.
10. Noorzad, R. and Mirmoradi, S.H. (2010), "Laboratory Evaluation of the Behavior of a Geotextile Reinforced Clay "Journal of Geotextiles and Geomembranes, Vol 28, pp 386-392.
11. Brinkgreve, R.B.J. and Vermeer, P.A. (1998), "Plaxis Finite Element Code for Soil and Rock Analysis,"BALKEMA, A.A., Rotterdam, Netherlands.

