

Domestic Microwave Oven and Fixed Geometry Waveguide Applicator Processing of Organic Compounds and Biomaterials: A Review

Victor J. Law¹ and Denis P. Dowling²

¹ University College Dublin

Received: 7 December 2017 Accepted: 31 December 2017 Published: 15 January 2018

Abstract

This paper reviews the use of domestic microwave ovens and fixed geometry waveguide applicators for processing of organic compounds and biomaterials. The review traces the microwave (f o 2.45 GHz) technological development of proof-of-principle and batch processes highlighting their advantages and disadvantages. Amongst the rapid homogeneous and heterogeneous processes reported are the treatment of organic compounds, thawing fresh frozen blood plasma, microwave-assisted desolvation, microwave-assisted extraction of bioactive materials, cleaning of dentures, plasma cleaning of polymer surfaces and plasma deposition of carbon-nanostructures. The arc-like plasmoid generated when foodstuff such as grapes were treated in a microwave oven is explored along with a study of microwave irradiated cherry tomatoes.

Index terms— microwave oven, waveguide, organic compounds, biomaterials, arc-like plasmoids, plasma

1 I. Introduction

he introduction of the tabletop domestic microwave oven into homes and restaurants has enabled food to be defrosted and cooked more rapidly compared with conventional techniques. The convenience and low cost of ownership of the oven has led to many other uses that include dielectric heating and plasma processing of inorganic and organic materials including biomaterials. The most common feature in the oven is the multimode resonant cavity (MRC) that is illuminated through one side wall of the cavity using a rectangular transverse electric (TE₁₀) waveguide with an interior waveguide aspect ratio of 2:1. This houses a packaged cavity-magnetron operating at a frequency of f o = 2.45 ± 0.1 GHz (λ ~ 12.2 cm). Using this configuration limited autoimpedance matching between the magnetron and the loaded MRC is achieved with no other impedance matching apparatus required. A refinement (or subcategory) of this design is the mono-mode fixed geometry waveguide applicator.

The aim of this paper is to review the use of multi-mode microwave ovens and mono-mode cavity applicators in the processing of organic compounds and biomaterials. The review includes the microwave This work reports on a number of different microwave system designs, therefore in order to facilitate and ease the comparison between devices and processes the original device and power levels are given. In the case where plasma is used the gas pressure is stated and converted to the equivalent SI unit of pressure (Pascal). As both the biological component of blood (plasma) and electrical discharge (plasma) are discussed, the word plasma referring to biological material is written in italics' and in plain text (plasma) when referring electrical gas discharge.

In the case of organic compounds it is well known that the reaction rates are generally proportional to the polarity of molecules containing bonds between atoms with very different electronegativities, such as oxygen and hydrogen [2]. Non polar compounds such as carbon tetrachloride and hydrocarbon solvents do not absorb significant amounts of microwave energy. Whereas the polarity of biomaterials is more complex in that the

induced electromagnetic field varies with their constituents parts. To quantify molecule polarity it therefore becomes necessary to use the materials dielectric properties. In this work four properties are considered and are listed as follows.

First, the materials dielectric constant (ϵ') which is a dimensionless number and is a measure of a materials ability to couple with microwave energy. The relationship of ϵ' to the effective wavelength within a material at a given frequency is given in equation 1. $\lambda = c / f \epsilon'$ (1)

In this equation, c is the speed of light (3×10^8 m.s⁻¹) and f is the magnetron frequency (2.45×10^9 Hz). From this relationship it becomes apparent that nonuniform heating of materials due to their size and geometry is an issue and one that is highlighted numerous times in this work.

The dielectric loss factor (ϵ'') is the second dimensionless number that is used as a measure of the materials ability to be heated by absorb microwave T oven production of plasmoids (fireballs) from fruit. It is important to note that microwave processing of food on an industry scale is outside the scope of this review. A recent comprehensive review of this area (including some of the equations used here) can be found in [1]. energy (via direct current or ohmic heating) and turned into heat. The ratio of ϵ''/ϵ' is called the loss tangent or dissipation factor and describes how easily the material is penetrated by the microwaves.

Thirdly, the penetration depth (d_p) is a measure of how deep microwaves can penetrate into the material that is being irradiated. It is defined as the depth where the dissipated power is reduced to e^{-1} (approximately 37%) of the initial power entering the surface. One formulation of this definition is given in equation 2. $d_p = \sqrt{2 / \omega \epsilon''}$ (2)

(2) From an electric engineering point of view the penetration depth equates to one skin depth (δ) in a metal layer, or electrical plasma, where three skin depths (three fold of e^{-1}) would be used to describe the full microwave radiation penetration [3]. However since the focus of this paper is organic compounds and biomaterials one skin depth [penetration depth] is sufficient. This is because when biological materials undergo ohmic heating its electrical conductivity increases due to ionic mobility as structural changes occurs in the tissue like cell wall protopectin breakdown, expulsion of non conductive gas bubbles and lowering in aqueous phase viscosity: all of which lead to an enhanced concentration of electrolytes, especially at high voltage gradients.

The thermal power (P) measured in units of Watts (J.s⁻¹) dissipated in the material may be estimated using the calorimetric equation 3 $P = m C_p \Delta T / t$ (3)

Where m is the density of the material (kg.m⁻³), C_p is the specific heat capacity of the material (J.Kg⁻¹ K⁻¹), ΔT is the change in material temperature (final temperature -initial temperature, t is the heating time (s).

To obtain the electric field strength (E , measured in units of V.m⁻¹), in which the process has taken place the power measurement is divided by the materials volume (V) thereby accessing E via the ohmic heating equation (4). $P V = 2 f \epsilon'' \epsilon_0 E^2 t$ (4)

In this equation the $2 f \epsilon'' \epsilon_0$ term represents the dielectric conductivity (σ) of the material, where (ϵ_0) is the permittivity of free space (8.8542×10^{-12} F.m⁻¹).

The remaining part of this review paper is structured as follows: Section 2 looks at microwave irradiation of organic compounds and biomaterials (thawing of frozen blood plasma components and disinfection and sterilisation of surfaces). Section 3 looks at microwave plasma processing of organic compounds in the presence of a passive catalyst (aerial antenna igniter). Section 4 looks at microwave experiments in school and at home in particular the production of arc-like plasmoids from cherry tomatoes and grapes. The dielectric heating mechanisms that underpin these processes are developed here. Finally Section 5 provides the conclusion to this review paper.

2 II. Microwave Irradiation of Organic

Compounds and Biomaterials a) Early processing of organic compounds The origins of dielectric heating of food can be traced back to demonstrations of food cooking at 1933 Chicago World's Fair [5] and the first microwave cooking of foodstuff patent application filed in 1945 [6]. This was followed by the first commercial microwave cooker built and sold by Raytheon in 1947 and Amana in 1967 [5,7]. These ovens where of limited commercial success due to their bulk and cost, but success came later when the cost effective packaged cavity-magnetron became available [8,9]. Although combination of microwave heating and chemical reactions were reported in early 1980s, it was not until large scale microwave oven production became available, that rapid synthesis of organic compounds became available. The work by Gedye et al [10,11] provides an early standard for proof-of-principle synthesis of organic compounds within a microwave oven. In their work they used a domestic Toshiba ER-800 BTC set to a power level of 180 to 560 W with a process time between 1 and 5 minutes. The organic reactions were carried out in replaceable 120 and 300 ml Teflon reactions vessels, where the reactants comprised 10% by volume of the vessel. Using this microwave method they showed that many polar compounds that require up to 2.5 hours to prepare using the thermal heating method can be synthesized effectively in a few minutes without significantly altering the reaction pathway. A schematic of the microwave oven used for these organic reactions is shown 1A. The safety procedures relating to the 'microwave superheating effect' in the absence of any stirring [2] of organic liquid products (solvents) [10,11] are restated here:

1. For processes that used more than 560 W and longer than 5 minutes: PFA reactions vessels fitted with pressure a pressure relief value designed to vent at approximately 100 psi (690 kPa) should be used.

2. After the heating is completed, the vessel is left to stand in the oven for 2 min to reduce the pressure in

105 the vessel. Then the hot vessel is removed from the oven and cooled in ice-water for a further 5 min before the
106 top being unscrewed.

107 3. When processing flammable organic solvents the microwave oven should be placed in a fume hood or within
108 a fume cupboard.

109 b) Microwave thawing of fresh frozen plasma Since the microwave (1.7 to 24 GHz) measurements on human
110 blood by Cook in the early 1950s [12,13] it is well known that the blood dielectric constant exhibits an inverse
111 frequency dependence. Within this dependence there are at least two flat (relaxation) regions: τ -dispersion
112 arising from the polarization of the cell membranes in the 10 KHz-to-200MHz region and the τ' -dispersion region
113 (near 18 GHz) due to the reorientation of water molecules [14]. A challenge to the thawing of blood products is
114 the starting temperature as it takes much longer to melt ice, than to heat H₂O in the liquid phase by 1 °C:
115 this is because the molecules are held in a crystal lattice that prevent the dipoles from following the microwave
116 fields as they can in the liquid water phase.

117 In 1984 Luff et al, reported on the operation of 2.45 GHz microwave oven for the rapid thawing of fresh frozen
118 plasma (FFP) with conventional water bath thawing at 37 °C [15]. In their work they highlight the need for
119 short duty cycle irradiation times (typically a 225 ml FFP bag required a duty cycle of 10 seconds on, 5 seconds
120 off for a process of time of 8-10 minutes) and to understand the effect of dielectric heating on the various blood
121 components and the appearance of flocculent regions within the blood bags that are associated with the ovens
122 multi-mode field hot-spots.

123 The water environment microwave thawing technique was reported by Mead et al 1996 [16]. In this work a
124 Sharp Carousel II Model R5850 oven is used, in which the FFP is totally immersed in an uncovered bowl containing
125 1.5 l of tepid tap water. A schematic of this is shown in figure 1B. Their studies revealed a considerably reduction
126 in flocculent regions in both size and amount which they attributed to a more even heat distribution within the
127 frozen plasma.

128 By 1992, Churchill et al [17] was using a specifically designed microwave oven (We slabs Plasma Defroster)
129 for thawing up to 4 x 200 ml FFP bags at a time. To test the new oven design they used coagulation screen
130 tests and levels of coagulation proteins in both microwave and water bath thawed samples. Their results revealed
131 little clinical difference between the two techniques, although the microwave irradiation procedure gave shorter
132 turnaround times (of the order of 7 minutes per bag) compared to the water bath discrepancies increases when
133 multiple bags of plasma are needed which is a major factor of consideration when thawing in emergency treatment
134 of trauma victims.

135 3 c) Microwave desolvation systems

136 In the mid 1990s the microwave oven desolvation system based on microwave aerosol heating was developed
137 for inductively couple plasma mass spectrometry [18]. The system used the Balay Model W-2235, domestic
138 microwave oven with a normal pulsed 900 W power. With the turntable removed a single-pass spray chamber
139 (80 cm³) made of Pyrex glass is centrally positioned in the MRC with the end plate of the chamber fixed to
140 the internal rear wall so allowing the outside mounted nebulizer to be connected to the spray chamber. A water
141 dummy-load was also placed within the MRC to prevent damage to the magnetron. See figure 1C.

142 The desolvation system was developed into a microwave TM₀₁₀-mode cavity by Grindlay et al in 2005
143 [19] and further developed in 2009 [20]. In these systems a cylindrical metal cavity forming a single coherent
144 mono-mode microwave field is used and within which the spray chamber is positioned. The microwave cavity is
145 then illuminated through an iris in the longitudinal side of the cavity. In this configuration a greatly reduced
146 power level of 300 W was found to produce similar aerosol effects as compared to [18]. A schematic of the TM
147 010 -mode cavity and waveguide is shown in figure 1D.

148 4 e) Microwave disinfection of dentures

149 In 2012 Brondani, et al published a critical review on the subject of microwave denture cleaning [27]. In their
150 work they highlighted that power levels above 850 W and irradiation times longer than 15 minutes produced
151 denture distortion: in addition based on the known phenomena that DNA molecules still present in dead bacteria
152 can be transferred to live bacteria [28] and that microwave irradiation kills microorganisms, but does not remove
153 them from the surface. Thus 'microwave' irradiation has only a momentary disinfection effect. The review was
154 shortly followed by Sesma et al looked at the effectiveness of followed by Sesma et al looked at the effectiveness
155 of

156 5 d) Microwave-assisted extraction of bioactive material

157 The first US Patent for microwave-assisted extraction (MAE) of natural products from biological material was
158 filed in 1990 and published in 1991 [21]. The patent was followed by a series of publications by Lagha et al [22]
159 and Clemat et al [23]. Their work provides studies of digestion and the extraction of terpenes from caraway seeds
160 with n-hexane as the solvent in a TE₁₀ mode waveguide applicator, rather than using a microwave oven. This
161 applicator involved the use of magnetron power levels in the range 10 to 120 W, with a processing times up to
162 60 minutes, see figure 1E.

163 In contrast to [22,23], Li et al [24] gives little information on the microwave-assisted extraction device they used
164 for the extraction of natural antioxidants from the exotic gordonia axillaris. It is worth noting that Ledesma-
165 Escobar et al [25] and Medina-Torres et al [26] have performed comparative studies of ultrasonicassisted extraction
166 (UAE) for bioactive products with other extraction methods including MAE. In their work they highlight that
167 UAE provides a less aggressive environment to that of MAE and note that the important factor of bioactivity of
168 the targeted products should be considered rather than the extraction rate.

169 6 f) Microwave sterilisation of glass and plastic

170 Microwave sterilisation of glassware preserving jars and plastic food containers has become commonplace in
171 homes [30]. In general the process comprises the use of pre-washed containers filled with tap water and placed in
172 a microwave oven and irradiated for 2 to 3 minutes. Indeed there are many commercial steam cleaning products
173 sold for use in microwave ovens. In the case of microwave induced steam cleaning of suitable microwave plastic
174 dishware leaching, or migration, of aromatic and chlorinated hydrocarbons is a health concern. Torrison has
175 reported on a brief gas chromatograph/mass spectrometer study on three different types of plastic dishware
176 containing water that were irradiated within a microwave oven for 10 minutes [31]. The result of this study
177 however was inconclusive and no information on the microwave oven power settings were given.

178 More recently (2014) Dhawan et al used Fourier transform spectrometry investigate microwave induced silicon
179 migration through highbarrier coated multilayer polymeric films after microwave processing [32]. The study was
180 carried out using selected food simulating liquids (FSLs, which represent aqueous and low-acid foods) [32]. In
181 their study the microwave system (Discover SP-D CEM MW system (CEM Corporation, Matthews, NC, USA)
182 contained a single-mode cavity with a 35 ml quartz test cell with a maximum working volume of 25 ml. Three
183 timetemperature combinations (pre-heating, processing and cooling) stages were selected to match closely with
184 the commercial sterilization and pasteurization schedules for single meal-sized pouches containing low-acid foods
185 [33]. In the microwave process range of 70 to 123 °C) and 18 to 34 minutes, their study indicated that silicon
186 may migrate from high gas barrier commercial multilayer coated films into the FSLs. No significant difference
187 was found however in the level of silicon migration after microwave irradiation when compared with conventional
188 heated water bath (121 o C) processes. denture cleaning associated with and without microwave disinfection,
189 with and without dentures brushing [29]. They found that microwave irradiation in combination with soaking in
190 denture cleanser and brushing is more effective in removing the bio film when compared to the use of microwave
191 irradiation only: thus revealing the absence of mass transportation mechanisms at the denture surface when using
192 only microwave irradiation. They also noted that some authors have suggested the use of denture microwave
193 steam cleaning to improve disinfection efficiency: this is because bubbles released by the boiling water help in
194 removing microorganisms from the surface.

195 7 III. Microwave Plasma Processing of Organic Compounds

196 When sufficient electromagnetic energy (i.e. provided by the microwaves) is applied to neutral gas, the plasma
197 can be formed in a converted microwave oven [34]. A review of the oven conversion process, calibration and
198 reactions obtained was published in 2018 [4]. Five of the heterogeneous organic reactions reported in [4] are given
199 here.

200 In 2003 Ginn and Steinbock presented their plasma cleaning of poly (dimethylsiloxane) (PDMS) surfaces
201 using modified microwave oven (Amana, ACM2160AB) [35]. In their oven the turntable was replaced with an
202 evacuated (~10 -3 Torr (0.133 Pascal)) desiccator in which the samples was removed and the desiccator chamber
203 in which the samples were placed along with an aerial antenna. Using the maximum power (1100W,) the plasma
204 was generated using the residual gas. Finally pre and post evaluation of the cleaning process was performed
205 using the surface water contact angles method. Their results revealed that a dramatic change in PDMS surface
206 contact angle from 112 ± 2 o C to less than 15 o for plasma exposure times of more than 25 seconds. This
207 hydrophobic to hydrophilic prosperity change has been widely reported to be associated with enhanced levels of
208 oxygen functionality of the polymer surface after plasma treatment [36]. This work was followed by a number of
209 YouTube postings showing microwave oven plasma cleaning of glass slides, see for example [37].

210 Khongkrapan et al reported on the pyrolysis of paper to produce gaseous waste by-products. This was carried
211 out using a converted commercial microwave oven with a continuous power of 800 W for 3 to 4 minutes [38,39].
212 In their oven the process occurs inside a cylindrical quartz tube (internal/external diameters of 27/30 mm and
213 length of 250 mm) that coaxially passes vertical through the MRC. After a pre-vacuum stage, air or argon is used
214 as the precursor gas at a nominal atmospheric pressure (101 k Pascal) with the gas flowing from the bottom to
215 the top of the MRC. The shredded paper (5 g) is suspended in the centre of the tube. A front view schematic
216 of their converted oven is shown in figure 3A. They also used a aerial-antenna igniter to start the plasma, for
217 further details of the igniter see [4].

218 Nomura et al [40,41] and Toyta et al [42] have described the use of a converted microwave oven for plasma
219 in-liquid decomposition of n-dodecane (molecular formula: C 12 H 26 (l)) to simultaneously produce hydrogen gas
220 and carbide in the hydrocarbon liquid using a microwave output power of 500 to 750 W. A typical representation
221 of these reactors is shown in figure 2A. The reaction is performed in a closed volume Pyrex reaction vessel
222 containing 500 ml of n-dodecane liquid with one or more igniters]. Also, two silicon/PTFE tubes are inserted

223 from the top of the cavity, one tube used for the carrying gas (argon) as the precursor gas and the second tube
224 used to collect both the spent argon and by-product gas at a working pressure close to atmospheric pressure.

225 In 2010 Singh and Jarvis reported the generation of carbon-nanostructures within a continuously pumped
226 3-port reaction flask (made from borosilicate glass and 1000 ml volume) that was held within the 1000 W rated
227 microwave oven [43]. To support the vessel and facilitate access to it the oven door was replaced with an
228 aluminium plate of the same size that has three apertures; one for each flask port. With the flask supported, the
229 flask was evacuated from the outside of the oven: using one port while the other two ports provide carrier gas
230 (hydrogen) and the selected hydrocarbon precursor based on their hydrogen-to-carbon ratio (ethanol (C₂H₆O),
231 xylene (C₈H₁₀) or toluene (C₇H₈)). To enhance the reaction a 2 mm diameter aerial-antenna igniter
232 was mounted on a stainless-steel base within the reaction flask. As no vacuum pressure or microwave power was
233 reported it is assumed that the flask was sub atmospheric and the microwave power was at maximum (1000 W).
234 Their converted microwave oven results revealed that selectively between onion-like nanostructures and carbon
235 nanotubes can be achieved. For the production of carbon nanotubes an ethanol (C₂H₅OH) solution with the
236 heterocyclic compound thiophene (C₄H₄S) as an additive plus a number of aerial-antenna igniters. For growth
237 of onion-like nanostructures, either toluene ((CH₃)₆H₄) or xylene ((CH₃)₂C₆H₄) is used without an
238 aerial-antenna igniter. It is worth noting that in the latter case the prior plasma art used a high cost unbalanced
239 magnetron sputtering system [44].

240 In the same publication year (2018) of reference [4] plasma induced synthesis of carbon nano-materials from
241 waste rice husk powered using a Samsung microwave oven (M539 MAN200405W) operating at 600 W for 38
242 minutes was reported by Anaswi et al [45]. Their experiments revealed that the vacuum pressure 1 mbar (100
243 Pascal) played a critical role in the deposition process. The incorporation of the organ metallic compound
244 ferrocene (Fe(C₅H₅)₂) was also found to have a catalytic role in the plasma induced reaction. They
245 also concluded that the use of waste biomass (rice husks) could be used as a source for high-value carbon
246 nanostructures. They speculated that this may help to solve the environmental issue caused by the world's huge
247 production of waste biomass. The converted oven has a similar coaxial narrow tube configuration as used by
248 Khongkrapan et al [38,39]. A generic front view schematic of these converted microwave ovens is shown in figure
249 2B.

250 8 IV. Microwave Oven Experiments in

251 School and at Home

252 Stanley et al [46] have reviewed the use of microwave oven experiments as a teaching resource within schools.
253 The experiments ranged from: the: generation of plasma balls, exploding eggs and the creation of soap sculptures.

254 The production of plasmoids at home in a microwave oven is also a common topic for YouTube postings.
255 Perhaps the simplest way of producing a plasmoid without modification to the microwave oven is to place a
256 partially sliced grape (that has its two halves connected via a thin piece of skin) on the centre of the microwave
257 oven glass turntable and then turn-on the microwave power for a maximum time of 8 to 10 seconds. YouTube
258 reference [47] shows that arc-like plasmoids are generated at the skin bridge that connects the two grape halves;
259 with the discharge emission continuing until the skin bridge through and the two halves are separated. This type
260 of reaction is not limited to slices grapes as it also happens when two whole grapes are placed together in the
261 microwave oven and when the microwave power is turned-on the generation of arc-like plasma repeatedly forces
262 the two grapes apart to a recoil reaction that finishes when the volumetric heating deforms the grape shape so
263 they do not fall onto each other [48].

264 The authors have repeated the YouTube postings using fresh raw sliced 2 cm diameter (spherical volume of
265 the order of 4.2 x10⁻⁶ m³) red and yellow cherry tomatoes within a microwave oven (Blue sky BMG20-8, rated
266 output power of 800 W) for 8 seconds at a applied power setting of 55% (440 W) which equates to 3.52 KJ of
267 energy delivered to the MRC. Figure 3A shows a freshly sliced red cherry tomato along with its constituent parts
268 (placental, seeds and paricarp). In this case the partially sliced cherry tomatoes form a arc-like plasma until the
269 skin bridge is burnt through (typically at 80 to 90 o C, some 60 to 70 o C above room temperature). See figure
270 3B. Once this point is reached the arc-like plasma stops leaving two separated tomato halves, both of which will
271 continue to undergo volumetric heating until the microwave power is turned-off.

272 To understand the mechanisms behind the cherry tomato reactions their dielectric properties (ε', ε'' and d p)
273 are evoked. Table ?? lists For the red cherry tomato, these properties have been determined using an open-ended
274 coaxial probe [49]. the mean bulk properties of cherry tomatoes at 2.45 GHz over a given specific temperature
275 range. Now considered the tomato's dielectric lost factor (ε'') and the narrow skin bridge which turns the two
276 halves of the tomato in to a dipole where free electrons are pushed back and forth through the narrow bridge.
277 Under these conditions electric current (I) flowing through the resistance (R) of the skin bridge can produce
278 arc-like plasmoid that rapidly burns through to leave two separated tomato halves leaving the paricarp visually
279 undamaged, see figure 3B. During this process volumetric dielectric heating rapidly increases temperature of the
280 fruit leading to material vaporization that generates a cloud of electrons and ions which in turn feeds the arc-like
281 plasmoid. Table ??: Mean bulk dielectric properties of fresh raw red cherry tomato at 2.45GHz.

282 Table ??: Specific heat capacity of materials used in the calculations.

283 The microwave computed bulk penetration depth (derived from the constituent dielectric properties of
284 tomatoes Peng et al [49]) is calculated using equation 2 and the results listed in Table ??; column 5. Here

9 CONCLUSIONS

285 it can be seen that the computed bulk d_p value of 13 ± 3.5 mm is lists the computed fits well within the radii of
286 the tomato, and allowing for another two-fold in e^{-1} depth it is reasonable to assume that full dielectric heating
287 of the cherry tomato is achieved.

288 Given that fresh raw red cherry tomatoes have a minimum water content of 90% [50] the thermal power
289 transferred from the microwave irradiation to the tomatoes can be estimated using calorimetric equation 3:
290 where the C_p value is computed from the mean value of water ($C_p = 4.184$ J/g.K [4]), tomato paste ($C_p =$
291 3.981 J/g.K [50]) and tomato juice ($C_p = 3.719$ J/g . K [51]) which equate to 3.961 ± 0.223 . See table 2. Given
292 this approach the power transferred to the tomato equates to 208 ± 14 W, or 47% of the applied power (440 W)
293 from the microwave oven magnetron.

294 With the knowledge of the transferred power being 208 ± 14 W, the electric field strength ($V.cm^{-1}$) in which
295 these process occurs may now be estimated using the ohmic heating equation 4; which yields a value of 54 ± 1.7
296 $V.cm^{-1}$. It is worth noting that the computed value is in the range (40-70 $V.m^{-1}$) studied by Srivastav and
297 Roy [51] for fresh tomato juice. In their study they found the juice electrical conductivity is strongly dependent
298 on temperature as well as the influence of the ohmic heating process within the fruit.

299 It is also noted that similar microwave irradiation experiments on sliced yellow tomatoes produced similar
300 arc-like plasmoids indicating that the reduced levels of chlorophyll and enhanced levels of yellow carotenoids has
301 little effect on the production of the arc-like plasmoid.

302 It is now worth comparing the microwave irradiated grapes experiments posted on YouTube [46,47] with
303 Thomson seedless grape dielectric properties published by Tulasidas et al [52]. This is performed by computing
304 the mean bulk dielectric properties as for the cherry tomato within a temperature of 20 A comparison of the
305 data within Table ?? and 3 reveals there is little difference in dielectric properties between tomatoes products
306 and grape. When taking into account Bingol et al calculations of the specific heat capacity of grapes (table ??)
307 [52] it may be concluded that the grape and cherry tomato have similar dimensional and dielectric properties
308 and therefore similar ohmic heating and arc-like behaviour when irradiated in a microwave oven. These results
309 also support the observation that both fruits exhibit an inherent active plasma catalytic property [4,54] within
310 them role in the production of arc-like plasmoids.


311 V.

312 9 Conclusions

313 This work has reviewed the domestic microwave oven and the microwave fixed geometry waveguide applicator
314 for proof-of-principle and small scale batch processing of organic compounds, biomaterials and carbon nano-
315 materials. Where possible the microwave device has been stated along with the microwave power conditions. In
316 all cases the power source is the package cavity-magnetron. In some cases the delivered power to the MRC is
317 not available. For surface sterilisation process the estimated surface temperature is reported. Given this, it is
318 reasonable to assume most of the microwave power conditions are below 800 W, which is lower than the general
319 rule for inorganic material processing within a microwave oven.


320 The papers reviewed in this work highlight that the extraction of bioactive compounds and disinfection/
321 sterilisation of thermal sensitive polymers require low temperatures and therefore the requirement for low
322 deliverable power (less than 120 W). In addition a means of mass transport from the irradiated surface is required
323 for effective disinfection/sterilisation. Sub-atmospheric to nominal atmospheric pressure (101 k Pascal) microwave
324 plasma processing of carbon nanostructures has been described. In these processes a passive plasma catalyst is
325 used which comprise a single, or multiple, aerial-antenna igniter that have a physical length approximating to $\frac{1}{4}$
326 or $\frac{1}{2}$ of the microwave length in which they are immersed in. By selecting the hydrogen-to-carbon ratio within
327 the organic precursor compound product selectivity between carbon nanotubes and onion-like nanostructures
328 that have the potential to be used as encapsulated drug delivery systems can be achieved; where the external
329 layer provides protection to the drug within.

330 In the home kitchen, arc-like plasmoid production from a sliced grape along with (to the author's knowledge
331 the first report) sliced cherry tomato has been discussed. The mechanism of arc-like plasmoid production from
332 both fruits has been discussed in terms of dielectric constant, dielectric loss and penetration depth. The process
333 occurs at absorbed power of 208 ± 14 W within an electric field of 54 ± 1.7 $V.cm^{-1}$. The analysis supports the
334 suggestion that slice Table ??: Dielectric properties of fresh raw grape at 2.45 GHz. grape and cherry tomatoes
335 exhibits a dipole like behaviour and that the fruit can act as an active plasma catalyst as the fruit electrolyte
336 can supply free electrons to the reaction.

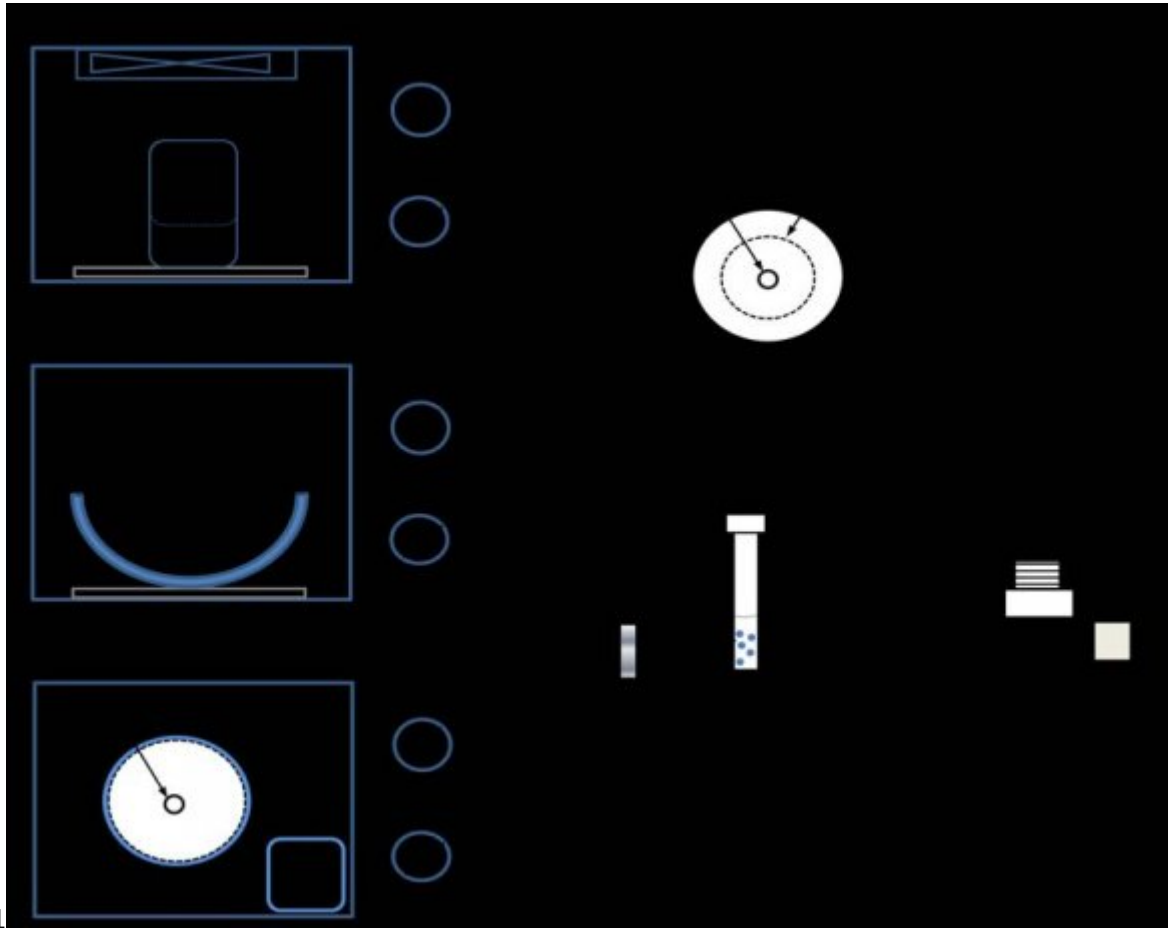


1

Figure 1: Figure 1 :

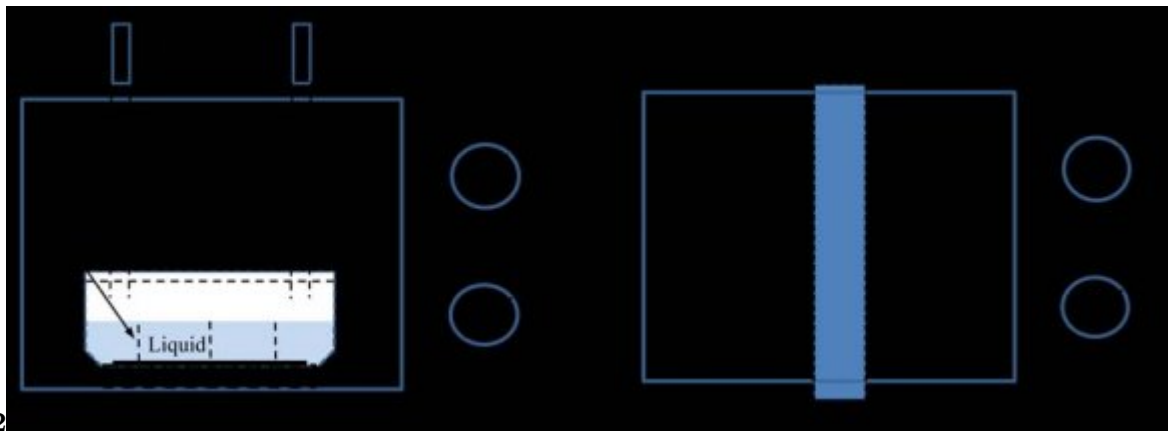

2

Figure 2: Figure 2 :

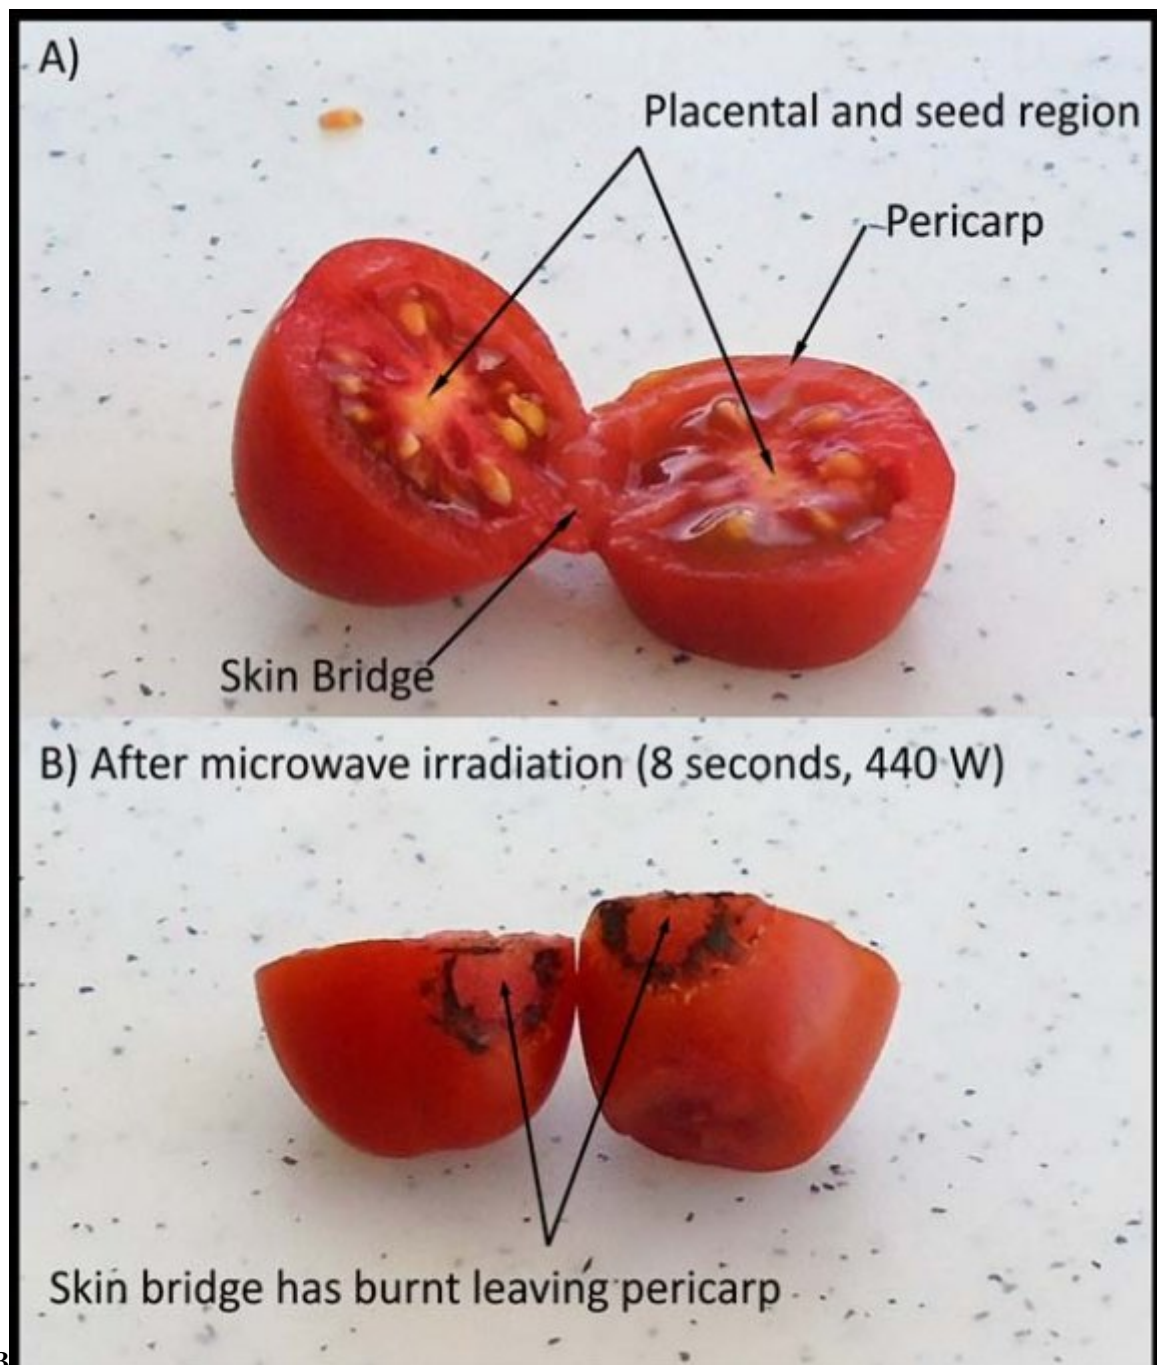

3

Figure 3: Figure 3 :

Fruit (temperature range)	?"	?"	?" (mm) d p (mm)*
Grapes (20 to 90 o C)	66 ±10	13 ±5	14.9 ±1
			13.7 ±4

[Note: *Calculated using equation 2.]

Figure 4:

.1 Acknowledgments

- 337
338 The authors would like to acknowledge the support of SFI through the I-Form Advanced Manufacturing Research
339 Center 16/RC/3872. The Authors declare that there is no conflict of interest regarding the publication of this
340 paper.
- 341 [Medina-Torres et al.], N Medina-Torres, T Ayora-Talavera, H Espinosa-Andrews, Angeles Sánchez-Contreras
342 and N.
- 343 [Cook ()] 'A comparison of the dielectric behaviour of pure water and human blood at microwave frequencies.
344 Br'. H F Cook. *J. Appl. Phys* 1952. 3 (8) p. .
- 345 [Brondani and Samim ()] 'A conventional microwave oven for denture cleaning: a critical review'. M A Brondani
346, F Samim, H, Feng. *Gerodontology* 2012. 29 p. .
- 347 [Davis] *A history of the microwave oven. The IEEE News Source*, A Davis. [https://www.theinstitute.
348 ieee.org/tech-history/technology-history/a-history-of-the-microwave-oven](https://www.theinstitute.ieee.org/tech-history/technology-history/a-history-of-the-microwave-oven)
- 349 [Grindlay et al. ()] 'A microwave assisted desolvation system based on the use of a TM010 cavity for inductively
350 coupled plasma based analytical techniques'. G Grindlay, S Maestre, J Mora, V Hernandis, L Gras. *J.
351 Anal. At. Spectrom* 2005. 20 p. .
- 352 [Toyota et al. ()] 'A practical electrode for microwave plasma processes'. H Toyota, S Nomura, S Mukasa.
353 *International Journal of Materials Science and Applications* 2013. 2 (3) p. .
- 354 [Perreux and Loupy ()] 'A tentative rationalization of microwave effects in organic synthesis according to reaction
355 medium and mechanism considerations'. L Perreux, A Loupy. *Tetrahedron* 2001. 57 p. .
- 356 [Wolf et al. ()] 'Broadband dielectric spectroscopy on human blood'. M Wolf, R Gulich, P Lunkenheimer, A
357 Loidl. *Biochim. Biophys. Acta* 2011. 1810 (8) p. .
- 358 [Srivastav and Roy ()] 'Changes in electrical conductivity of liquid foods during Ohmic heating'. S Srivastav, S
359 Roy. *Int J Agric & Biol Eng* 2014. 7 (5) p. .
- 360 [Renfrew et al. ()] 'Cleaning and sterilisation of infant feeding equipment: a systematic review'. M Renfrew, M
361 Mc Loughlin, A Mcfadden. *Public Health Nutrition* 2008. 11 (11) p. .
- 362 [Ledsema-Escobar et al. ()] 'Comparative study of the effect of sample pretreatment and extraction on the
363 determination of flavonoids from lemon (citrus limon)'. C A Ledsema-Escobar, F Capote, M D Luque
364 De Castro. *PLoS one* 2016. 11.
- 365 [Law and Dowling ()] 'Converting a Microwave oven into a plasma reactor: a review'. V J Law, D P Dowling.
366 *International Journal of Chemical Engineering* 2018. 2018. p. 12.
- 367 [Grindlay et al. ()] 'Design and evaluation of a new fully microwave-assisted liquid sample introduction device
368 for inductively coupled plasma atomic emission spectrometry'. G Grindlay, L Gras, J Montiel, J Hernandis
369, Mora. *J. Anal. At. Spectrom* 2010. 5 p. .
- 370 [Cook ()] 'Dielectric behaviour of human blood at microwave frequencies'. H F Cook. *Nature* 1951. 168 p. .
- 371 [Tulasidas et al. ()] *Dielectric properties of grapes and sugar solutions at 2.45 GHz. The Journal of Microwave
372 Power and Electromagnetic Energy: a publication of the International Microwave Power Institute*, T N
373 Tulasidas, G S V Raghavan, F Van De Voort, R Girard. 1995. p. .
- 374 [Peng et al. ()] *Dielectric properties of tomatoes assisting in the development of microwave pasteurization and
375 sterilization processes. LWT -Food Science and Technology*, J Peng, J Tang, Y Jiao, S G Bohnet, D M
376 Barrett. 2003. 54 p. .
- 377 [Sesma et al. ()] 'Effectiveness of denture cleanser associated with microwave disinfection and brushing of
378 complete dentures: in vivo study'. N Sesma, A L Rocha1, D C Laganá, B Costa, S Morimoto. *Brazilian
379 Dental Journal* 2013. 24 (4) p. .
- 380 [Mora et al. ()] 'Evaluation of a microwave desolvation system in inductively coupled plasma mass spectrometry
381 with low acid concentration solutions'. A Mora, V Canals, E H Hernandis, M T C Van Veen, De Loos-
382 Vollebregt. *J Anal. At. Spectrom* 1983. 13 p. .
- 383 [Khongkrapan et al. ()] *Fuel gas and char from pyrolysis of waste paper in a microwave plasma reactor*, P
384 Khongkrapan, P Thanompongchart, N Tippayawong, T Kiatsiriroat. 2013. p. .
- 385 [Soxfreak5243] *Grapes making fireballs in the microwave*, Soxfreak5243. [https://www.youtube.com/watch?
386 v=JrD6yzemDRw](https://www.youtube.com/watch?v=JrD6yzemDRw)
- 387 [Bingol et al. ()] 'Mathematical modeling of microwave-assisted convective heating and drying of grapes'. G
388 Bingol, Z Pan, J S Roberts, Y O Devres, M O Balaban. *Int J Agric & Biol Eng* 2008. 1 (2) p.
389 .
- 390 [Spencer (1950)] *Method of treating foodstuffs. US. 2,495,429*, P L Spencer. Jan. 1950. p. 24. (Issued)
- 391 [Stanley ()] 'Microwave experiments at school'. H Stanley. *Science in School* 2009. 12 (summer) p. .

9 CONCLUSIONS

- 392 [Joseph ()] ‘Microwave heating in food processing’. O I Joseph . *BAOJ Nutrition* 2017. 13 (1) p. 9.
- 393 [Ribner ()] *Microwave plasma etching machine and method of etching*, A Ribner . 1989. 4 p. 431. (issued Feb 14)
- 394 [Singh and Jarvis ()] ‘Microwave plasmaenhanced chemical vapour deposition growth of carbon nanostructures’.
- 395 R Singh , A L L Jarvis . *S. Afr. J. Sci* 2010. 106 p. 4.
- 396 [Tang et al. ()] ‘Microwave sterilization of sliced beef in gravy in 7 oz trays’. Z Tang , G Mikhaylenko , F Liu ,
- 397 J H Mah , J Tang , R Pandit , F Younce . *J. Food Engineering* 2008. 89 p. .
- 398 [Luff et al. ()] ‘Microwave technology for the rapid thawing of frozen blood components Am’. R D Luff , C M
- 399 Kessler , W R Bell . *J. Clin. Pahol* 16. J. H. Mead, B. P. Boucock, R. E. Russell, C. S. Robinson and G.
- 400 Harris (ed.) 1985. 1986. 83 (4) p. . (A.J.C.P.)
- 401 [Li et al. ()] ‘Microwave-Assisted extraction of natural antioxidants from the exotic gordonia axillaris Fruit:
- 402 optimization and identification of phenolic compounds’. Y Li , S Li , Sheng-Jun Lin , Jiao-Jiao Zhang ,
- 403 Cai-Ning Zhao 1 , Hua-Bin Li . *Molecules* 2017. 22 p. .
- 404 [Chemat et al. ()] ‘Microwave-assisted kinetics of terpenes from caraway seeds’. S Chemat , H Ait-Amar , A
- 405 Lagha , D C Esveld . *Chem. Eng. Proc* 2005. 44 p. .
- 406 [Lagha et al. ()] ‘Microwave-ultrasound combined reactor suitable for atmospheric sample preparation procedure
- 407 of biological and chemical products’. A Lagha , S Chemat , P V Bartels , F Chemat . *Analisis* 1999. 27 p. .
- 408 [Pare et al. ()] *Microwaveassisted natural products extraction. US. 5,002,784*, J R Pare , M Sigomin , J Lapointe
- 409 . 1991. 26. (Issued Mar)
- 410 [VJ ()] ‘near-field plasma probe’. VJ . *Vacuum* 1998. 51 (3) p. .
- 411 [Darvishi et al. ()] ‘Ohmic heating behaviour and electrical conductivity of tomato paste’. H Darvishi , A
- 412 Hosainpou , F Nargesi . *Journal of Nutrition & Food Sciences* 1000167 2012. 2 (9) .
- 413 [Iwamura and Kinoshita (2003)] *Oinon-like nanostructures film and its production. US. 6,559,492, B2, E*
- 414 Iwamura , Kinoshita . July. 2003. p. 29.
- 415 [Kumar and Kumar ()] *Plasma assisted joining*, D Kumar , S Kumar . <https://www.youtube.com/channel/UCFG3h7mSlTjtsKcXH0dFCHQ> 2007. 17. (US. 7,309,843 B2.. Issued Dec)
- 416
- 417 [Tallaire] *Plasma cleaning in modified microwave oven at LSPM (CNRS*, Tallaire . https://www.Youtube.com/watch?v=e0k4G_HhceQ
- 418
- 419 [Ginn and Steinbock ()] ‘Plasma processing for tailoring the surface properties of polymers, H. Abourayana and
- 420 D. P. Dowling, book chapter in Surface Energy’. B T Ginn , O Steinbock . *Langmuir* M. Aliofkhazraei
- 421 (ed.) 2003. 2015. Intech-Open Access Publisher. 19 p. . (Polymer surface modification using microwave-oven-
- 422 generated plasma)
- 423 [Nomura et al. ()] ‘Production of hydrogen in a conventional microwave oven’. S Nomura , H Toyota , S Mukasa
- 424 , H Yamashita , T Maehara , A Kawashima . *J. Appl. Phys* 2009. 106 (7) p. 73306.
- 425 [Gedye ()] ‘Rank and K. C. West away. The rapid synthesis of organic compounds in microwave ovens’. R N
- 426 Gedye , W . *II. Can. J. Chem* 1991. 69 (4) p. .
- 427 [Dhawan et al. ()] ‘Silicon migration from high-barrier coated multilayer polymeric films to selected food
- 428 simulants after microwave processing treatments’. S Dhawan , S S Sablani , J Tang , G V Barbosa-Cànovas ,
- 429 J L Ullman , K Bhunia . *Packag. Technol. Sci* 2014. 27 p. .
- 430 [Nomura et al. ()] ‘Simultaneous production of hydrogen and carbon nanotubes in a conventional microwave
- 431 Oven’. S Nomura , H Yamashita , H Toyota , S Mukasa , Y Okamura . *International Symposium on Plasma*
- 432 *Chemistry (ISPC19)*, (Bochum, Germany) 2009. 65.
- 433 [Slepkov] *Slow-motion grapes and hydrogel beads making plasma in microwave oven*, A Slepkov . <https://www.youtube.com/watch?v=0LmaXQsssYY>
- 434
- 435 [Avery et al. ()] ‘Studies on the chemical nature of the substance inducing transformation of pneumococcal types’.
- 436 O T Avery , C M Macleod , M Mccarty . *J. Exp. Medicine* 1944. 79 p. .
- 437 [Asnawi et al. ()] ‘Synthesis of carbon nonmaterial’s from rice husk via microwave oven’. M Asnawi , S Azhari ,
- 438 M N Hamidon , I Ismail , I Helina . *J. Nan materials* 2018. 2018. p. 4.
- 439 [Churchill et al. ()] ‘Thawing fresh frozen plasma in a microwave oven a comparison with thawing in a 37 °C
- 440 water bath’. W H Churchill , B Schmidt , J Lindsey , M Greenberg , S Boudrow , C Brugnara . *Transfusion*
- 441 *Medicine* 1992. 97 (2) p. .
- 442 [Torrison (1999)] ‘The effect of microwave radiation on polypropylene used in food containers’. L Torrison .
- 443 *Cantaurus* May 1999. 7 p. .
- 444 [Osepchuk ()] ‘The history of the microwave oven: A critical review’. J M Osepchuk . *Digest IEEE Int. Microwave*
- 445 *Symposium* 2009. p. .

- 446 [Gedye et al. ()] 'The rapid synthesis of organic compounds in microwave ovens'. R N Gedye , F Smith , K C
447 West . *Can. J. Chem* 1988. 6 (1) p. .
- 448 [Khongkrapan et al. ()] 'Thermochemical conversion of waste papers to fuel gas in a microwave plasma reactor'.
449 P Khongkrapan , N Tippayawong , T Kiatsiroat . *J. Clean Energy Technologies* 2013. 1 (2) p. .
- 450 [Pacheco ()] 'Ultrasound assisted extraction for the recovery of phenolic compounds from vegetable sources'.
451 Pacheco . *Agronomy* 2017. 7 (47) .
- 452 [Mims (1973)] *US. 3,739,225. Microwave magnetron*, J R Mims . June. 1973. p. 12.
- 453 [Koinuma ()] *US. 3,809,590. Magnetron*, T Koinuma . 1974. 7. (Issued May)