

Finned Electric Motor with Prescribed Heat Flux and Influence of the Internal and External Heat Convection Coefficients on the Temperature of the Core

Marcus Vinicius Ferreira Soares¹ and Élcio Nogueira²

¹ Rio de Janeiro State University

Received: 6 December 2018 Accepted: 31 December 2018 Published: 15 January 2019

Abstract

One of a major objective is to analyze the effect of internal and external convection coefficients in the heat transfer generated by electric motors and characterize intervals of feasible values, in practical terms, for these coefficients. Another objective is to determine the motor core temperature, considering the environmental and operational conditions of the motor installation and the heat flux Q_0 (fixed) in the fins. To achieve the objectives were developed analytical solutions for determining the temperature variations in the fins, performance and electric motor efficiency, considering heat flow constant at the base of the fins and the possible variations in temperature of surround media. The heat flux at the base of the fins, in this case, is the minimum necessary for satisfactory electric motor performance and the core temperature is within the safety range stipulated by the manufacturer. The obtained results characterize a range of possible values for the inner and outer heat transfer coefficients.

Index terms— finned electric motor; constant heat flow; efficiency; efficacy.

1 Introduction

Factors that allow electric motors to lose up to 4% of their performance over their lifetime are improper installations, lack of regular maintenance, cleanliness and quality lubrication (Cardoso et. Al., 2009). Therefore, overheating the electric motor and consequently burning it is a problem for maintenance personnel, since heat produced by the electric motor must be dissipated efficiently, avoiding overheating and consequent burning. The high temperatures of the installation environment and the inefficient heat dissipation generated by the difference in net power supplied by the motor and power absorbed in the line is the main cause of overheating (Santos, Rafael Simões, 2011).

Fins or the extended surfaces are extensively used in engineering applications to increase the heat transfer efficiency of surfaces, and are of vital importance in the design of heat exchange devices in different fields of applications in order to provide an enhanced heat transfer effect through an increase in the total heat exchange area (Campo, A.; Kundu, B., 2017), (Incropera, Frank P. Et Al., 2008), (Santos, T. A. M., 2017). Once the temperature distribution through the fin is known, the heat transfer rate and the efficiency can be readily determined.

In electric motors, it is common to use extended surfaces, which increase the exchange area as a mechanism for heat transfer optimization. In fact, an important industrial application of fins occurs in electric motors and are of vital importance in the industry as they are used in machines of all types, including, for example, computer ventilation and other electronic equipment. A well-dimensioned finned ventilation system can contribute to energy savings.

The heat dissipation is directly associated with efficient ventilation, the temperature difference between the engine housing surface and the medium (in this case, the air surrounding the engine), the total heat exchange

For analysis purposes, a maximum engine core working temperature of 98 °C is assumed. The manufacturer sets the maximum operating temperature equal to 120 °C.

Analyzing Figure ??, for the external temperature of 40 °C, we have that, for Cast Iron the motor to work in the acceptable temperature range, the value of h_2 must be greater than or equal to 200 W / (m² . °C).

For the value of $h_1 = 200$ W / (m² . °C), shown in Figure ??, the motor works at the limit established in the research and we can conclude that the motor works properly for values of h_1 above 200 W / (m² . °C).

Analyzing Figure ??, for the external temperature of 40 °C, we arrive at the following conclusions: for $h_1 = 100$ W / (m² . °C) the motor temperature is equal to 128.61 °C, which goes beyond the limit value. From research of 98 °C. In the same Figure ??, for h_1 Figure ??, is the graph constructed from the data generated for engine efficiency. Note how aluminum results are far superior to cast iron. $\eta_{eff} = \frac{Q_{out}}{Q_{in}} = \frac{h_2 A_2 (T_{core} - T_{amb})}{h_1 A_1 (T_{core} - T_{amb})} = \frac{h_2}{h_1} \cdot \frac{A_2}{A_1} = \frac{h_2}{h_1} \cdot \frac{D_2^2}{D_1^2} = \frac{h_2}{h_1} \cdot \frac{1}{4} = \frac{h_2}{4 h_1}$ 25

Another parameter to be analyzed is the effectiveness of the engine, which is the ratio between fin and non-fin motor heat exchange. The efficacy formulagiven by: $\epsilon = \frac{h_2 A_2 (T_{core} - T_{amb})}{h_1 A_1 (T_{core} - T_{amb})} = \frac{h_2}{h_1} \cdot \frac{A_2}{A_1} = \frac{h_2}{h_1} \cdot \frac{D_2^2}{D_1^2} = \frac{h_2}{h_1} \cdot \frac{1}{4} = \frac{h_2}{4 h_1}$)26

Again, Figure ??, demonstrates that the results for aluminum are much higher than those obtained by cast iron.

Looking at Figure ??, we can conclude that a reasonable effectiveness value for a fin of 2.5 is achieved when h_2 is near 400 W / (m² . °C) for cast iron.

Based on the results observed above, and in the graphs of efficiency and effectiveness, we conclude that for any values of $h_1 \geq 200$ W / (m² . °C) and $h_2 \geq 200$ W / (m² . °C) the engine temperature will have a satisfactory value. However, the values of h_1 and h_2 are physically limited. For h_1 to assume values greater than 400 W / (m² . °C), forced ventilation must be used with the aid of a fan inside the engine or by drilling holes in the housing to increase natural ventilation. In addition, for h_2 to assume values greater than 400 W / (m² . °C), ventilation must be increased in the environment where the engine is installed, which would generate more costs for the company.

The above results are consistent with the results presented and experimentally confirmed by Micallef (2006), Figure ?? above, in his doctoral dissertation entitled "End Winding Cooling in Electric Machines". In his studies, using experimental and numerical method CFD -Computation Fluid Dynamic, the author applied three distinct turbulence models, and the results showed that the closer to the motor core, the higher the heat transfer coefficient by convection acting on the internal surfaces.

The measured internal coefficient assumed values close to 300 W / (m² .K), a value that is included in the working range proposed by this study.

IV.

4 CONCLUSION

The motor core temperature was computationally simulated by varying the internal (h_1) and external (h_2) convection heat transfer coefficients and the ambient temperature. The results demonstrated two things: the importance of the internal heat transfer coefficients and their physical limitations.

Regarding the heat transfer coefficients, we can conclude that the values of h_1 and h_2 cannot be treated separately. For very low h_1 and h_2 values the fins tend to be at the same temperature as the outside temperature, so there is no efficient heat exchange, overheating the engine. For very high h_1 values, which is physically impossible to obtain, we have that the fin base tends to stay with the motor core temperature, with is the usually conditions generally used by the one-dimension and two-dimension fin models.

We conclude that for any values of $h_1 \geq 200$ W / (m² . °C) and $h_2 \geq 200$ W / (m² . °C) the motor temperature will have a satisfactory value. However, as already mentioned, the values of h_1 and h_2 are physically limited. For h_1 to assume values greater than 400 W / (m² . °C), which is already a critical value to obtain for mechanical reasons, it is necessary to use forced ventilation inside the engine or drill holes in the housing to increase nature ventilation. The same reasoning can be used for the external coefficient h_2 , which would entail a higher cost to the company, as it would be necessary to increase ventilation at the engine installation site.

Thus, the ranges, 200 ≤ h_1 ≤ 300 and 200 ≤ h_2 ≤ 400, are the limit values that guarantee the lowest value for the heat transfer rate required for efficient heat removal. Any values above these will increase the transfer rate and consequently decrease the motor core temperature, however, considering the difficulties of achieving these values in practical terms.

Power	1 cv
Number of Poles	4
Motor Outer Diameter	139,60 mm
Engine Width	130,13 mm
Number of Fins	32
Fin Base Width	5,84 mm
Fin Height	17,00 mm
Maximum Ambient Temperature	40 °C

2019

Figure 1: 29 Year 2019 Finned


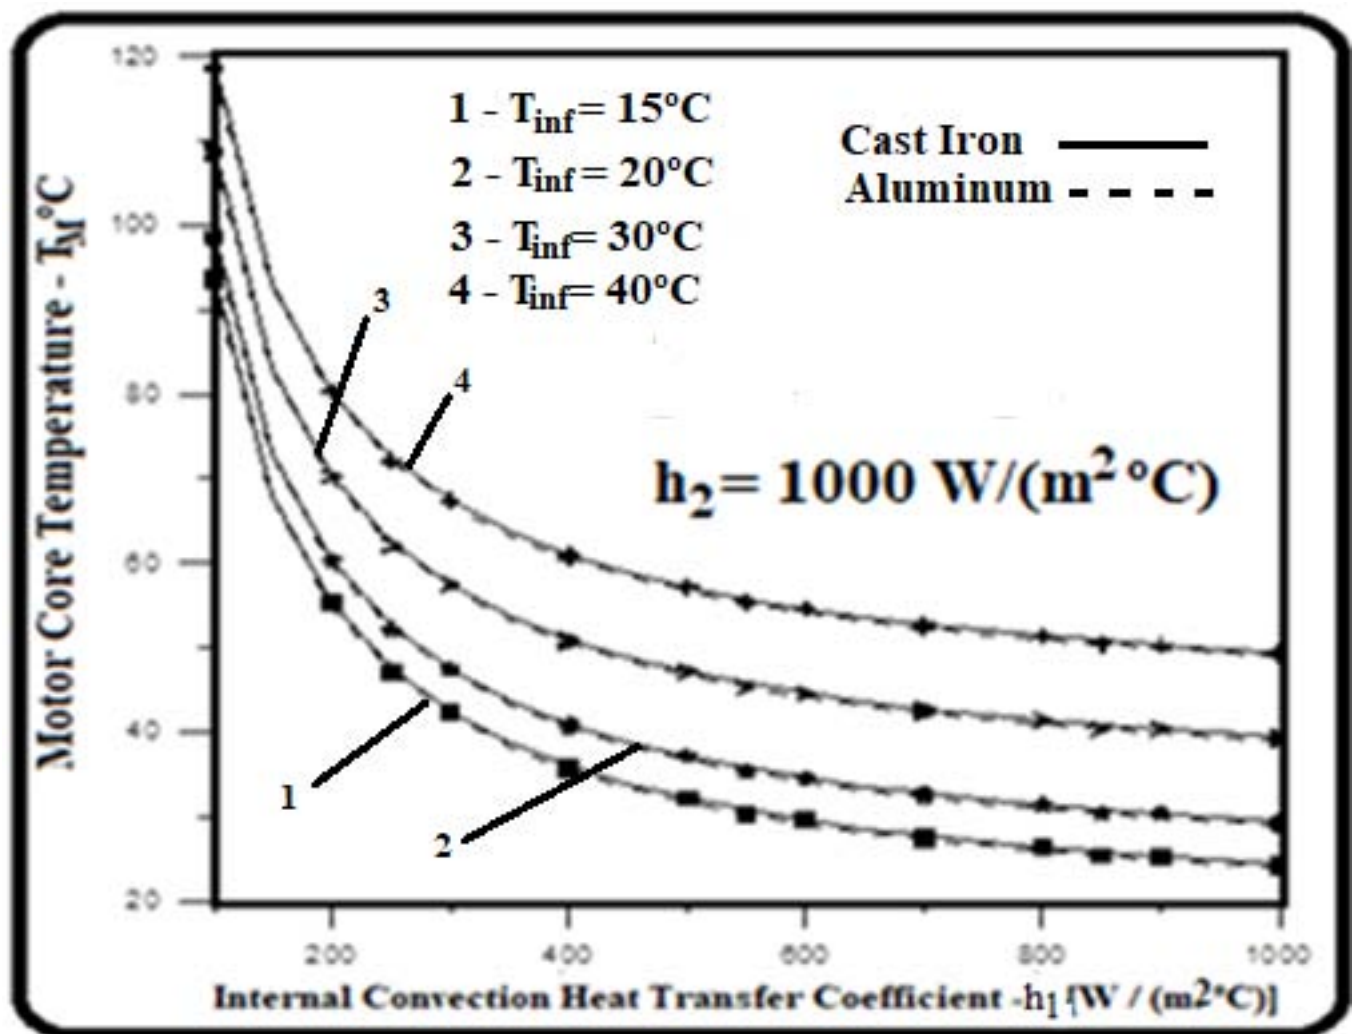


Figure 2: Figure1:

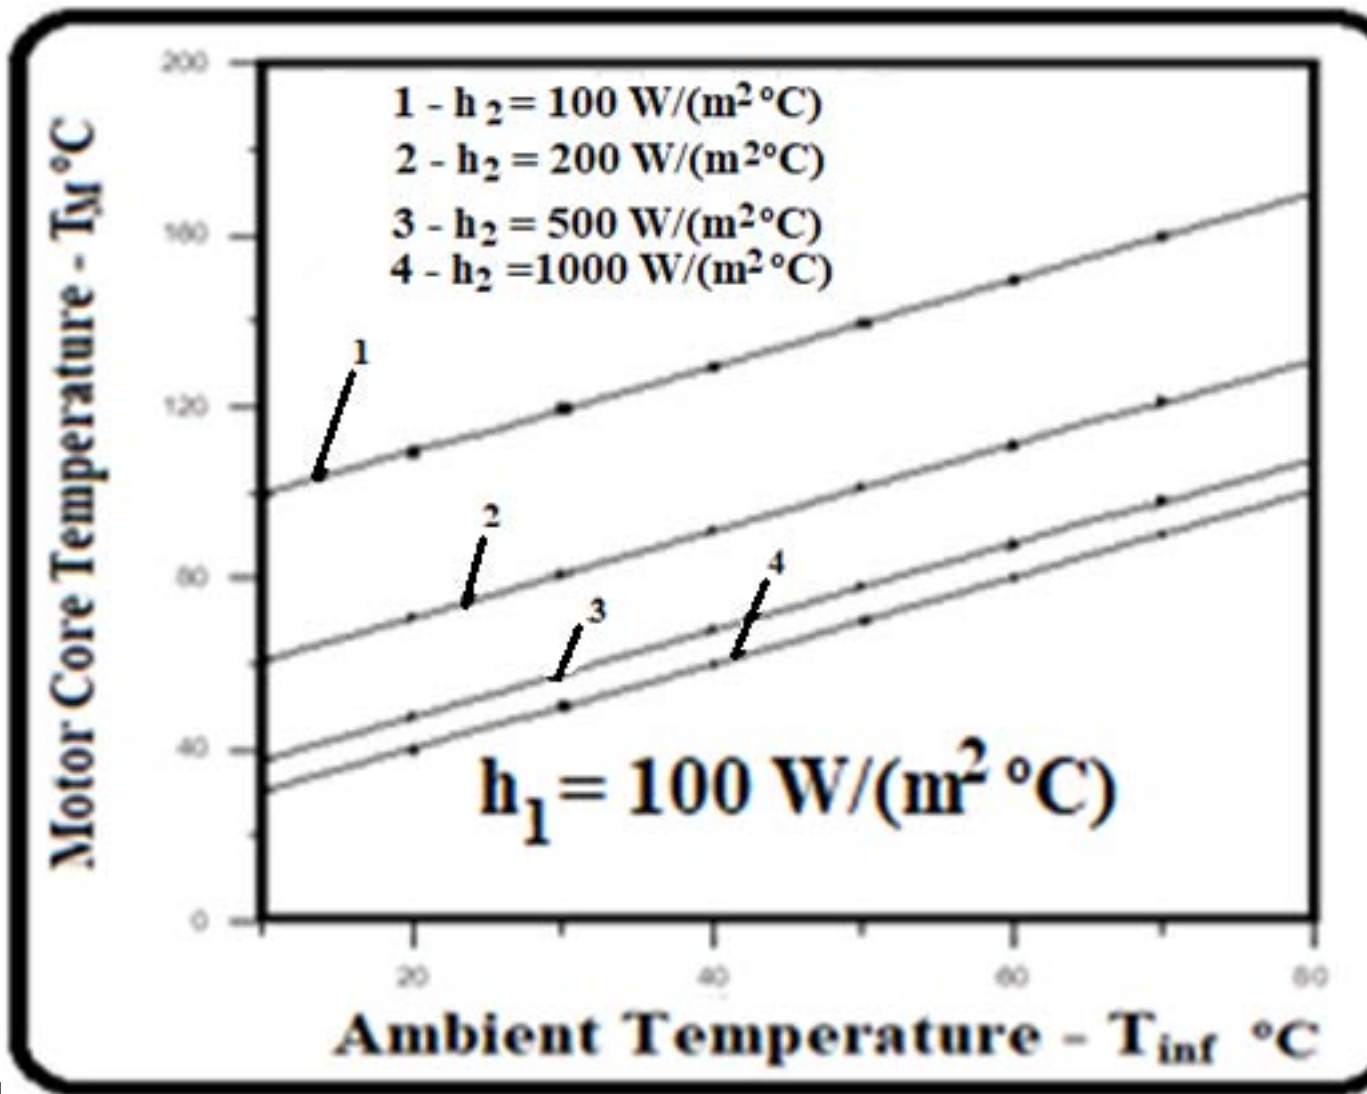

24

Figure 3: Figure 2 :Figure 4 :

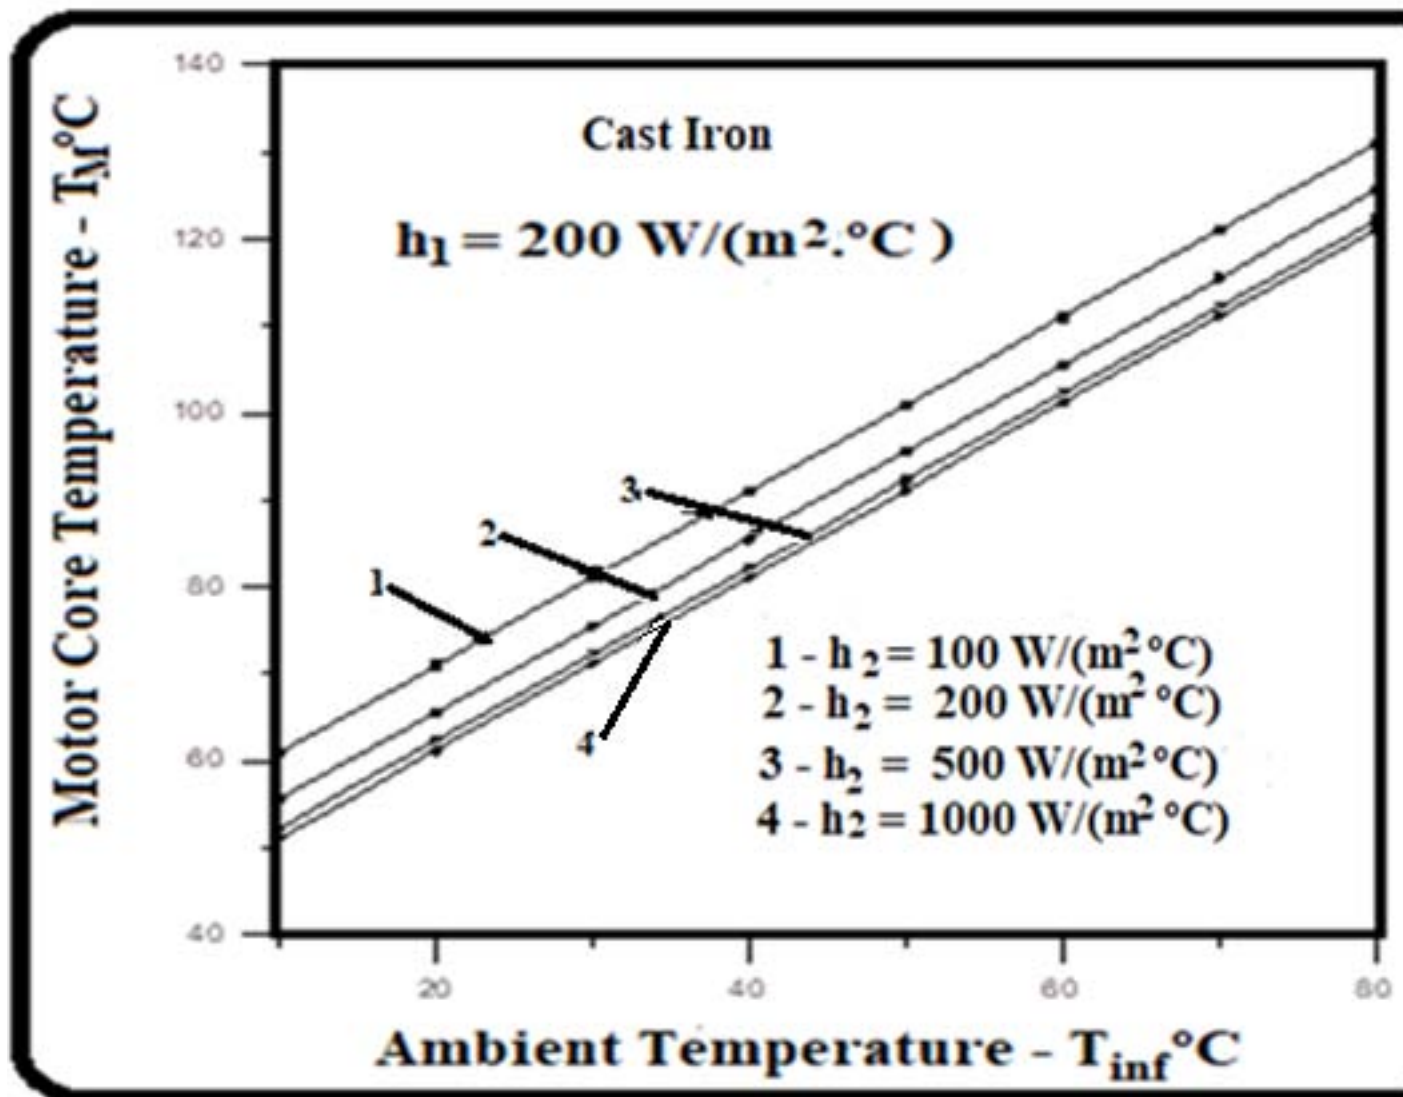


Figure 4:

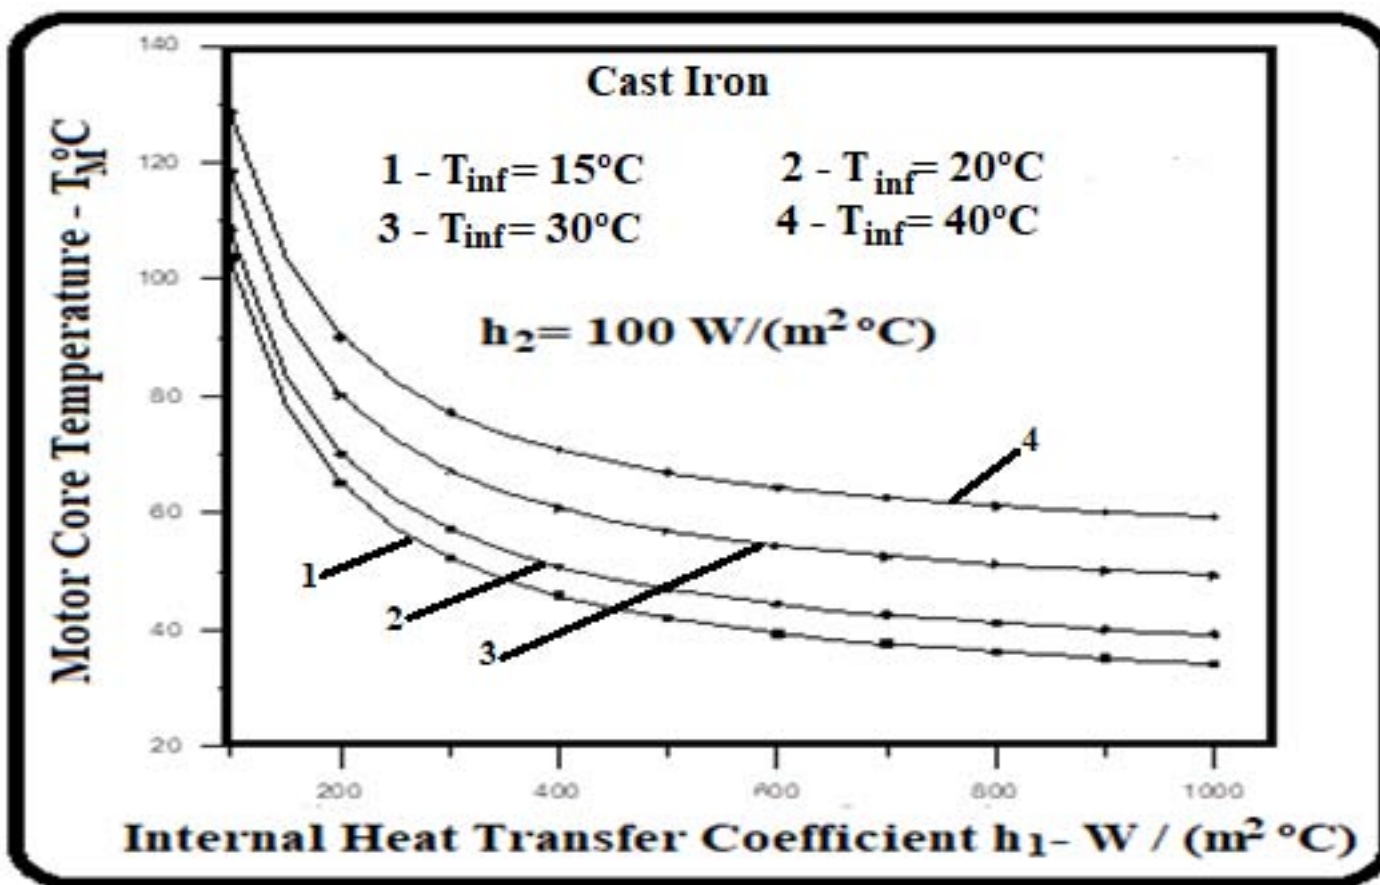


Figure 5:

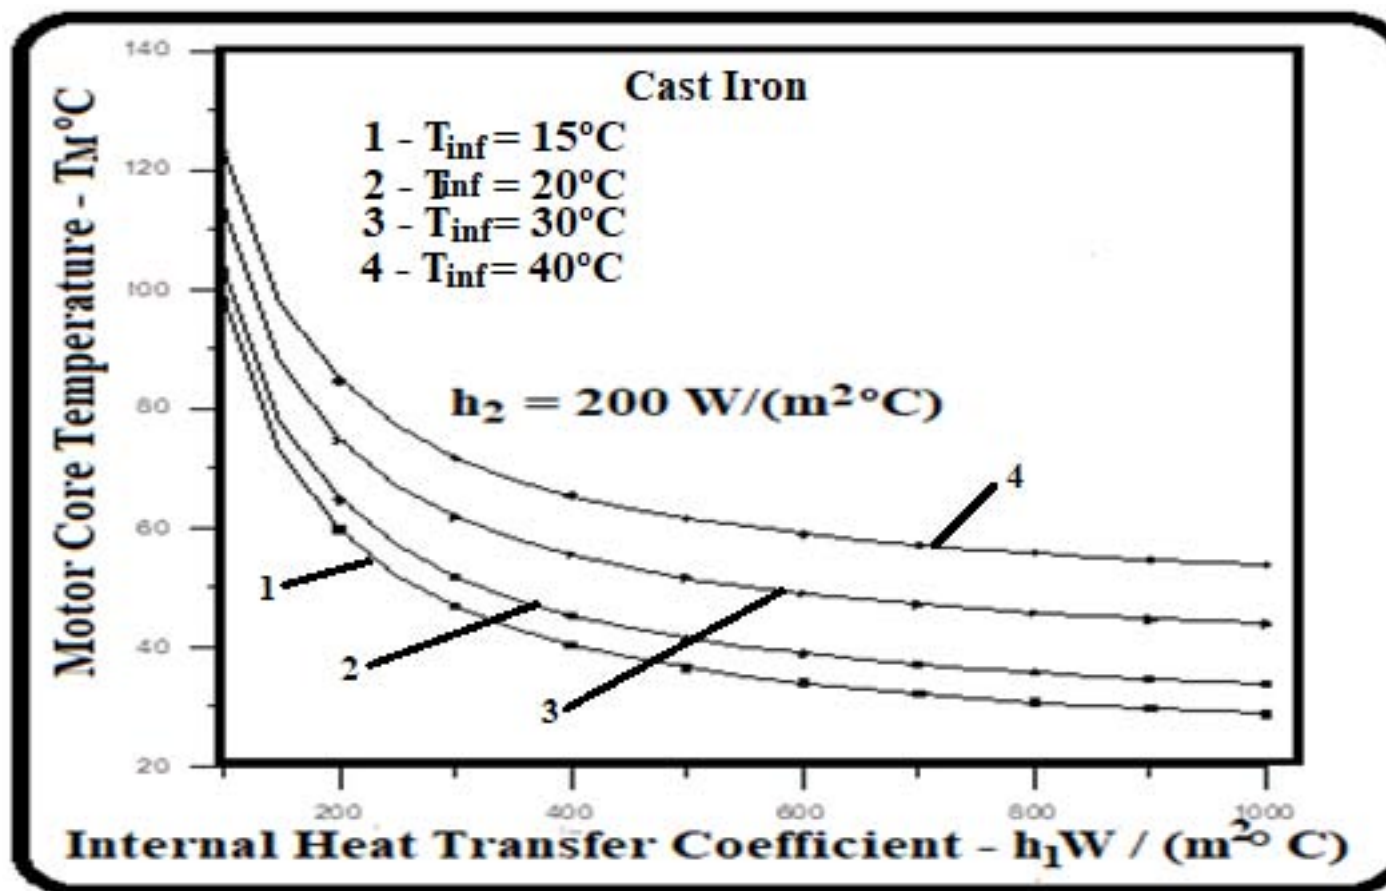


Figure 6:

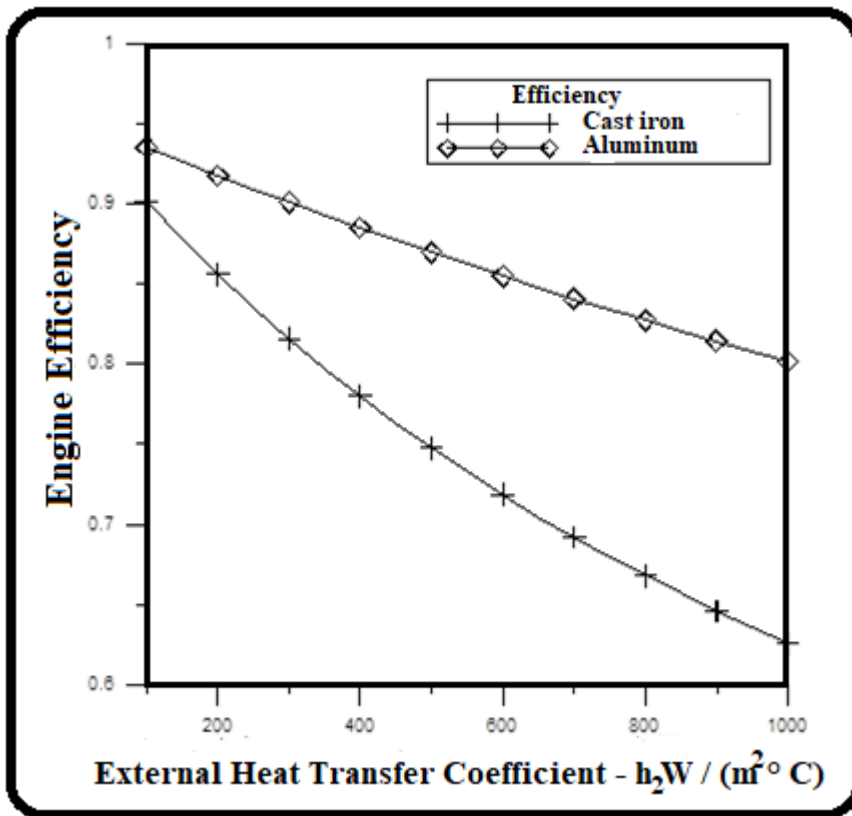


Figure 7:

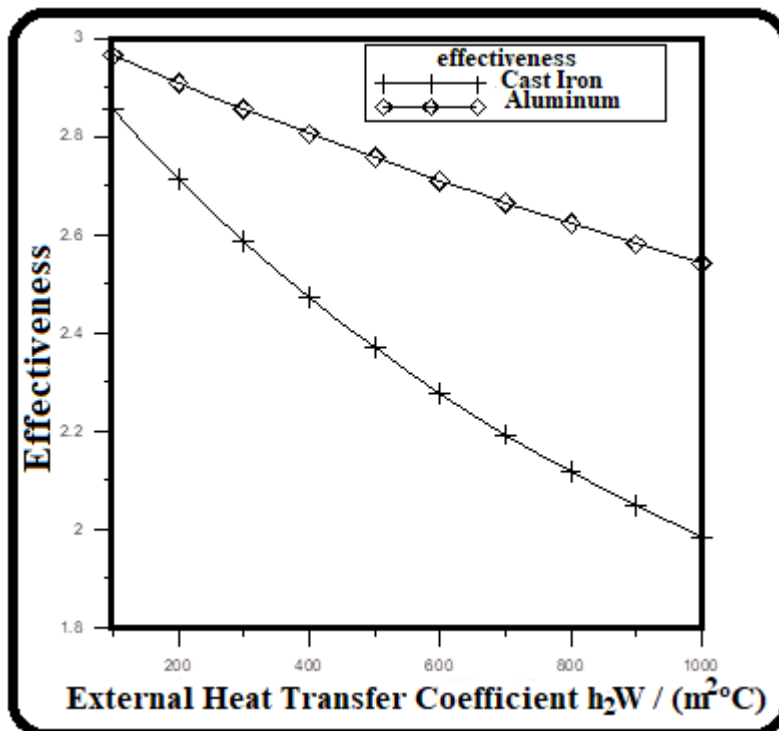


Figure 8:

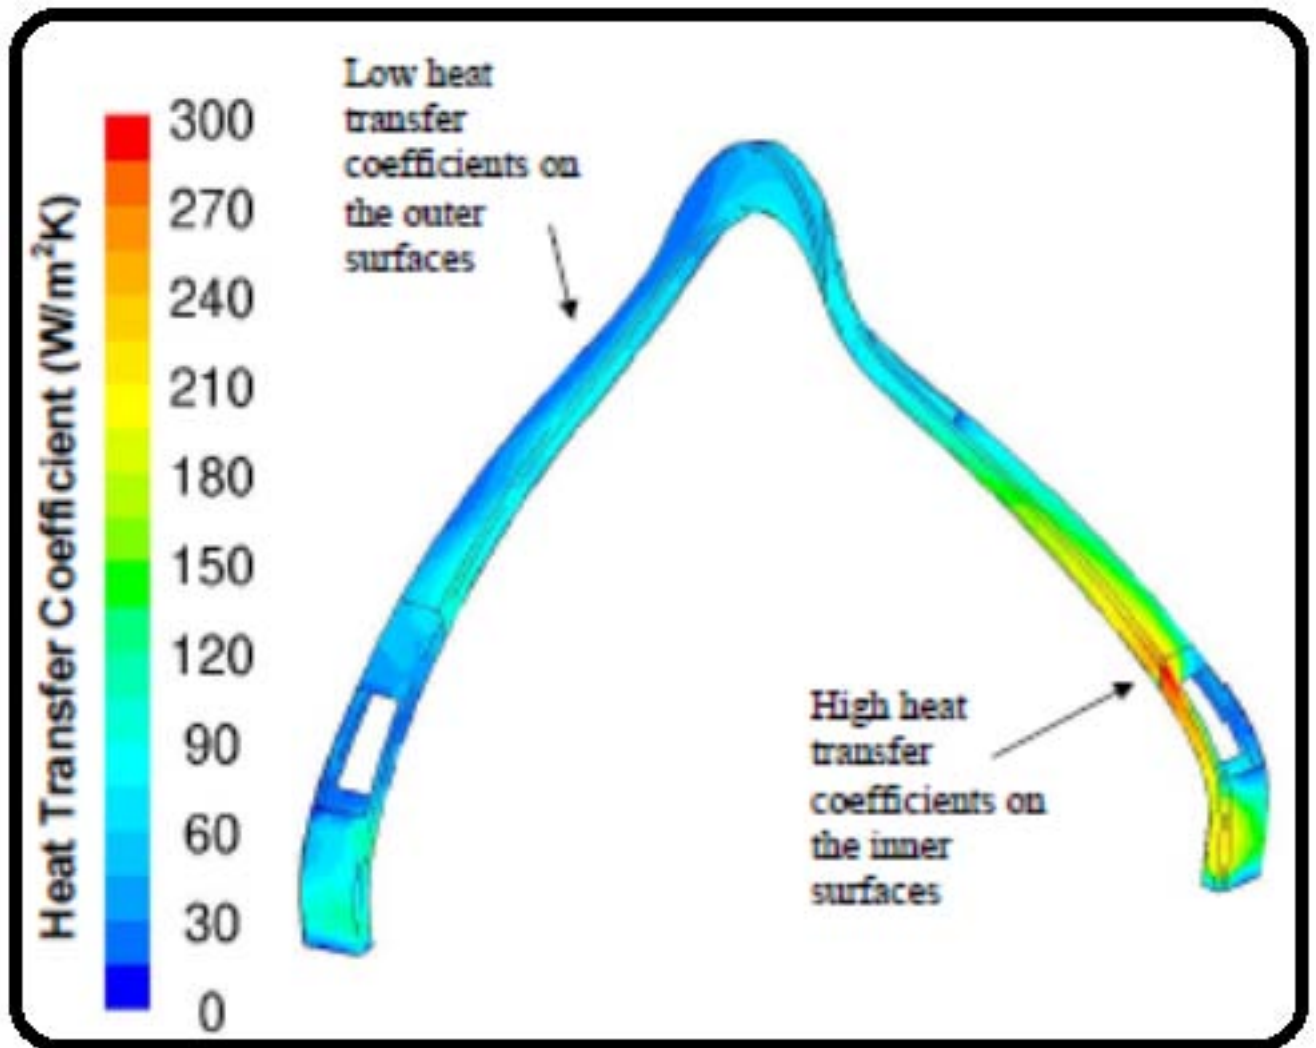


Figure 9:

2

h1	?? ? = 15	°C Al	?? ? = 20	°C Al	?? ? = 30	°C Al	?? ? = 40	°C Al
W/(m ² °C)	Iron Cast		Iron Cast		Iron Cast		Iron Cast	
100	93,86	93,40	98,86	98,40	108,86	108,40	118,86	118,40
150	68,16	67,70	73,16	72,70	83,16	82,70	93,16	92,70
200	55,31	54,85	60,31	59,85	70,31	69,85	80,31	79,85
250	47,60	47,14	52,60	52,14	62,60	62,14	72,60	72,14
300	42,46	42,00	47,46	47,00	57,46	57,00	67,46	67,00
350	38,79	38,33	43,79	43,33	53,79	53,33	63,79	63,33
400	36,04	35,58	41,04	40,58	51,04	50,58	61,04	60,58
450	33,90	33,43	38,89	38,43	48,89	48,43	58,89	58,43
500	32,18	31,72	37,18	36,72	47,18	46,72	57,18	56,72
550	30,78	30,32	35,78	35,32	45,78	45,32	55,78	55,32
600	29,61	29,15	34,61	34,15	44,61	44,15	54,61	54,15
650	28,62	28,16	33,62	33,16	43,62	43,16	53,62	53,16
700	27,78	27,32	32,78	32,32	42,78	42,32	52,78	52,32
750	27,04	26,58	32,04	31,58	42,04	41,58	52,04	51,58
800	26,40	25,94	31,40	30,94	41,40	40,94	51,40	50,94
850	25,83	25,37	30,83	30,37	40,83	40,37	50,83	50,37
900	25,33	24,87	30,33	29,87	40,33	39,87	50,33	49,87
950	24,88	24,42	29,88	29,42	39,88	39,42	49,88	49,42
1000	24,47	24,01	29,47	29,01	39,47	39,01	49,47	49,01

Figure 10: Table 2 :

.1 Authors

- [Duarte and Freire] , Denise Duarte , Freire . Novais, Ariane Silva.
- [Novais and Silva] , Ariane Novais , Silva .
- [Soares ()] ‘Analysis of the Influence of Convection Heat Transfer Coefficient on the Temperature of the Finned Electric Motor Core with Heat Flow Prescribed at the Base’. Marcus Vinicius Ferreira Soares . *Oswaldo Aranha Foundation. Advisor: Élcio Nogueira* 2015. Volta Redonda University Center (Course Conclusion Paper. (Degree in Mechanical Engineering. in Portuguese)
- [Beng and Micallef (2006)] *End Winding Cooling in Electric Machines*, Christopher Beng , Micallef . September 2006. University of Nottingham
- [Cardoso and Balbino ()] ‘Energy Savings Assessment Attributed to Energy Labeling Actions in Induction Motors In Brazil’. Rafael Cardoso , Balbino . *Brazilian Journal of Energy* 2009. 15 p. . (N. 1.1 Sem.)
- [Campo and Kundu ()] ‘Exact Analytic Heat Transfer from an Annular Fin with Stepped Rectangular Profile’. A Campo , B Kundu . 10.7726/ajhmt.2017.1013. *American Journal of Heat and Mass Transfer* 2017. 4 (4) p. .
- [Incropera ()] *Heat and Mass Transfer Fundamentals*, Frank P Incropera . 2008. Brazil, LTC. p. 644. (6th ed. Riode Janeiro)
- [Moreira] ‘Processos de Transferência de Calor’. José R Moreira . set/2012. USP
- [Nogueira ()] *Rectangular Profile Fin Analytical Solution: Comparison of Thermal Performance Between Aluminum and Cast Iron in Electric Motors*, Élcio Nogueira . 2012. Uni FOA, Volta Redonda, Brazil.
- [Ordenes et al.] *Surrounding Heat Transfer in Building*, M Ordenes , R Lambert , S Güths . (Departamento de)
- [Novais et al. ()] ‘Theoretical Analysis of Thermal Performance of Finned Electric Induction Motors’. Ariane ; Novais , R D F Chagas , Élcio Nogueira . *Cadernos UniFOA (Online), v. IX* 2014. p. . (in Portuguese)
- [Comitre and Chagas ()] ‘Thermal Performance of Heat-Flowed Electric Motors Prescript On The Rectangular Flip Bases’. Roberta Duarte Ferreira Comitre , Chagas . *Advisor: Élcio Nogueira*, 2014. Degree in Mechanical Engineering) -Volta Redonda University Center (Oswaldo Aranha Foundation. in Portuguese)