



GLOBAL JOURNAL OF RESEARCHES IN ENGINEERING
GENERAL ENGINEERING
Volume 12 Issue 4 Version 1.0 Year 2012
Type: Double Blind Peer Reviewed International Research Journal
Publisher: Global Journals Inc. (USA)
Online ISSN: 2249-4596 & Print ISSN: 0975-5861

Two Ways of Rotating Freedom Solar Tracker by Using ADC of Microcontroller

By Sobuj Kumar Ray, Md. Abul Bashar, Maruf Ahmad & Fahad Bin Sayed

IUBAT-International University of Business Agriculture and Technology Dhaka, Bangladesh

Abstract - Solar trackers are used to improve electric power radically of photovoltaic panel by using different sensor. The sensors retrieve the solar radiation. This paper presents a simple method, low cost microcontroller based solar tracker of two ways of rotating freedom in order to achieve the right positioning of photovoltaic solar cell to get the much sunlight during the day light session and as a result produce more electricity. This tracking system is developed with two direct current motor operated by a PIC16F72 microcontroller which processes the sensors (LDR) information by its internal ADC-analog to digital converter with Fuzzy logic and send correct information to motor controller IC-LM392D by which motor is operated. The motor is so operated that the panel can rotates two ways such as horizontally and vertically of its direction. A comparison has been made on a conventional solar follower plant and trucking system.

Keywords : solar tracker, two ways of rotating freedom mechanism, adc-analog to digital converter, fuzzy logic, microcontroller and dc gear motor controller.

GJRE-J Classification : FOR Code : 090608, 290902



Strictly as per the compliance and regulations of :



© 2012 Sobuj Kumar Ray, Md. Abul Bashar, Maruf Ahmad & Fahad Bin Sayed. This is a research/review paper, distributed under the terms of the Creative Commons Attribution-Noncommercial 3.0 Unported License (<http://creativecommons.org/licenses/by-nc/3.0/>), permitting all non commercial use, distribution, and reproduction in any medium, provided the original work is properly cited.

Two Ways of Rotating Freedom Solar Tracker by Using ADC of Microcontroller

Sobuj Kumar Ray^α, Md. Abul Bashar^σ, Maruf Ahmad^ρ & Fahad Bin Sayed^ω

Abstract - Solar trackers are used to improve electric power radically of photovoltaic panel by using different sensor. The sensors retrieve the solar radiation. This paper presents a simple method, low cost microcontroller based solar tracker of two ways of rotating freedom in order to achieve the right positioning of photovoltaic solar cell to get the much sunlight during the day light session and as a result produce more electricity. This tracking system is developed with two direct current motor operated by a PIC16F72 microcontroller which processes the sensors (LDR) information by its internal ADC-analog to digital converter with Fuzzy logic and send correct information to motor controller IC-LM392D by which motor is operated. The motor is so operated that the panel can rotate two ways such as horizontally and vertically of its direction. A comparison has been made on a conventional solar follower plant and trucking system.

Keywords : solar tracker, two ways of rotating freedom mechanism, adc-analog to digital converter, fuzzy logic, microcontroller and dc gear motor controller.

1. INTRODUCTION

The consumption of energy especially of electrical energy is increasing day by day in this world. Energy stored in different form in nature but the main source of energy is fuel viz. solid fuel as coal, liquid fuel as oil and gas fuel as natural gas and the Nuclear energy. But reservations of these fuels are diminishing day by day and other side Nuclear power plants are natural polluters of environment. So that, the present trend is to increase the use of renewable or alternative energy like wind, water, solar. At this moment one of the most important and attractive sources of energy is solar energy. Solar energy is playing very effective role from beginning of the world. The sun is infinite, clean energy source, no noise and free of cost and it supplies to earth about 10,000 times as much energy of the world's energy consumption [1].

So, it is time to use of solar radiation energy by converting into electrical energy or converting into our require energy forms. It is a very common problem of use of solar energy is its daily and seasonal variation of solar radiation direction. Use of solar energy is limited with sunny hours so use of it is not continuous.

Author α σ ρ ω : DESCO- Dhaka Electric Supply Company Limited, Others Dept. of Electrical and Electronics Engineering, IUBAT- International University of Business Agriculture and Technology Dhaka, Bangladesh.

E-mail : sobuj_kumar_ray@yahoo.com, mabashar@iubat.edu, maruf@eee-lab.com & fahad@eee-lab.com

Therefore, as compare with the utilization of solar energy it is due to high cost and low efficiency [1]. To optimize this problem, many researchers try to inventing more effective methods of utilizing solar energy [2]. One of these methods is solar tracking system.

In Every day, the sun rises in the east, moves across the sky and sets in the west. If we could set a solar cell to turn and focus at the sun all day hours, then it is possible to receive maximum amount of sunlight and convert into more useful energy like electricity [3]. Solar module current is very sensitive to the isolation of the sun. So, small change in the radiation of the solar in the solar module makes the current drops very rapidly and at each hour, the earth rotates 15 degree about its own axis. Therefore, solar panel must rotate 15 degree every hour to follow the direct radiation of the sun otherwise output of the module will be decreased [3].

Again, during a specific local time the radiation depend on solar elevation and azimuth angle.

For a fixed panel and a mobile one, the values of global radiation, its components (direct, diffuse and reflected) and the value MPP (Maximum Power Point) for the panel are reported [4-8].

We see in the city solar panel is still standing on the roof of the building and receive most of sun radiation of the midday sun[5].

In our work we develop two ways of rotating freedom solar tracker that means it can rotate both vertically and horizontal direction so that it can set with any position to aim with the sun from its own axis. Therefore it can increase its peak hours (high radiated light receiving) as consistently it can increase its efficiency. In cloudy sky, there could be a small component of direct radiation and a substantial component of diffuse radiation [9-10]. Using a trucking PV we can absorb the greatest amount of radiation as possible. The maximum radiation is obtained by providing the panel in a manner not perpendicular to sunlight, in the cases in which, for example, the sky is cloudy and the diffused component is more greater towards different directions to the "panel-sun" one [11].

In annually solar tracking system can increase 35% of its overall efficiency [1].

To develop solar tracking system, many researchers use many process. On these studies, we use analog to digital converter of microcontroller and Fuzzy logic to process the light sensor data for sun positioning for the solar tracker. In this paper shows the

structural view, hardware and electrical view and programming system of solar tracker system.

II. STRUCTURAL VIEW OF TWO WAYS OF ROTATING FREEDOM SOLAR TRACKER SYSTEM

As we know, solar panel should be directly perpendicular to the sunlight so that radiation of sunlight is highest. But, position of the sun is not same place during the whole day. Therefore, direction of the sun radiation is not same and its changes during the course of the day. So, if we can use solar tracking system it would give maximum solar efficiency [12].

The structural view of two ways of rotating freedom solar tracker by using ADC of microcontroller is shown in figure 1.

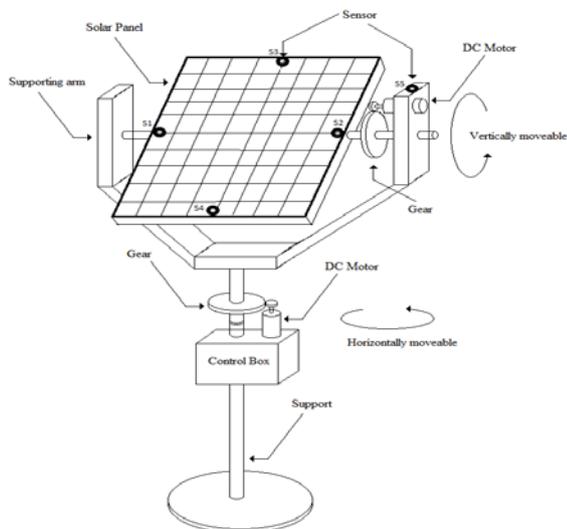


Fig. 1 : Structural view of two ways rotating freedom solar tracker.

In the system shown in Figure 1, a solar panel is mounted over the supporting arm with consisting two direct current motor with gear mechanism, five LDR (light depended resistor sensor) sensors and a control box. The light detecting system consists of five light depended resistors (LDR) which are LDR1, LDR2, LDR3, LDR4 and LDR5 represent in figure 1 as S1, S2, S3, S4 and S5 respectively mounted on the solar panel and placed in an enclosure. The sensors are setup in a way that LDR1 and LDR2 are used to track the sun horizontally for drive the horizontal positioning motor while LDR3 and LDR4 are use to track the sun vertically for drive the vertical positioning motor [13]. The LDR5 is use to detect it is day or not because only day session system will be the working mode. This sensors information is processes by using fuzzy logic because it emulates human acceptable reasoning and could make decisions on inaccurate information [14]. The all operations are operated by control box where microcontroller and motor control ICs processes whole

detection and control system. So that, both motors vertical and horizontal movement to ensure proper tracking of the solar panel in any position of the sun with respect to the East-West or North-South [14].

III. THE SYSTEM ARCHITECTURE

The system architecture of two ways of rotating freedom solar tracker system is shown in figure 2.

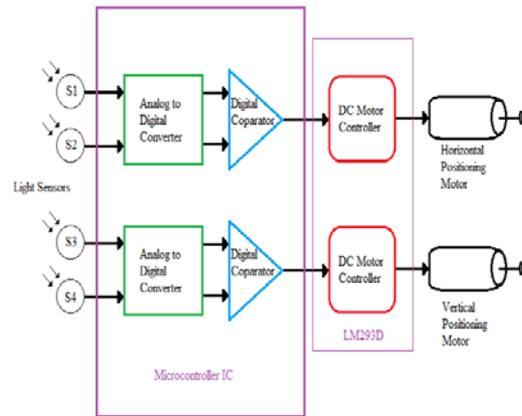


Fig. 2 : Block Diagram

The solar tracker system consists of LDRs, Microcontroller and its internal ADC (analog to digital converter), motor controller IC LM293D and direct current motor.

- LDRs detect the sunlight intensity. When consume high sunlight intensity resistance is decreased and supply high current trough it.
- Microcontroller and its internal analog to digital converter measure the LDRs supplied current and converted its corresponding digital value. This is again process by Fuzzy logic and then gives necessary signal to the motor controller IC.
- The motor controller IC of LM293D drive the DC motor by the direction of microcontroller

a) Analog to Digital Converter

The Analog-to-Digital Converter (ADC) allows conversion of an analog input signal to a 10-bit binary representation of that signal. This device uses analog inputs, which are multiplexed into a single sample and hold circuit. The output of the sample and hold is connected to the input of the converter. The converter generates a 10-bit binary result via successive approximation and stores the conversion result into the ADC result registers (ADRESL and ADRESH) [15].

The ADC voltage reference is software selectable to be either internally generated or externally supplied.

The ADC can generate an interrupt upon completion of a conversion. This interrupt can be used to wake-up the device from Sleep.

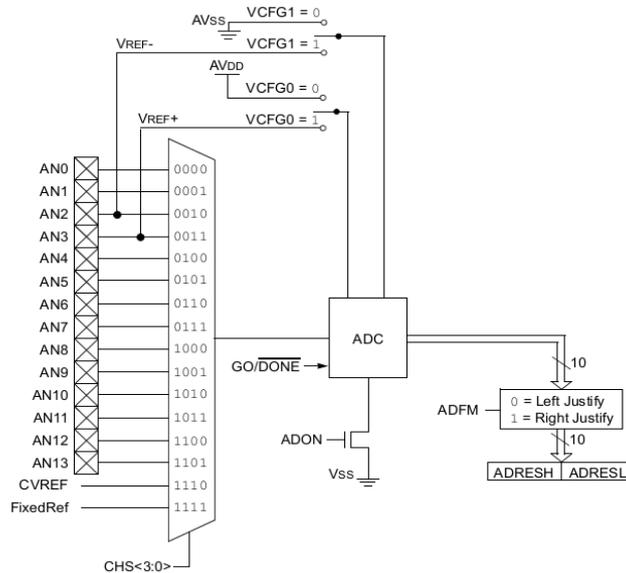


Fig. 3 : Shows the block diagram of the ADC of PIC16F72 [15].

b) Fuzzy Logic

Fuzzy logic is a form of many-valued logic or probabilistic logic. It deals with reasoning that is approximate rather than fixed and exact and it is very closure to the human behavior. Machines can be provided to give decisions like humans by using fuzzy logic and fuzzy cluster operations [1].

Our fuzzy logic rules for solar tracker system as follows:

	Fuzzy Logic rules
1	If S1 > S2 then M1 is clockwise rotate
2	If S1 = S2 then M1 is not rotate
3	If S1 < S2 then M1 is anti-clockwise rotate
4	If S3 > S4 then M2 is clockwise rotate
5	If S3 = S4 then M2 is not rotate
6	If S3 < S4 then M2 is clockwise rotate

IV. CIRCUIT DIAGRAM OF SOLAR TRACKER SYSTEM

The electrical architecture of two ways of rotating freedom solar tracker is shown in figure 4.

Here No.1 a voltage regulator IC LM7805 is used for constant 5V DC supply. As the system operating voltage is 12V and microcontroller is needed maximum 5V to operate. Therefore, 5V voltage regulator is used.

No.2 Sensor part, here five LDRs are used where four are used for vertical and horizontal solar tracking purposes and LRD5 is used for day or night detection purpose.

No.3 There is microcontroller IC of PIC16F72 with 4MHz Crystal and bypass capacitors. Microcontroller processes the whole control system of this circuit.

No.4 Switching part, This is basically a technique by which it control over rotating of solar panel

in any direction and also initialize the solar panel position when no light is available means night. Note that we primary set the solar panel in a direction where it is start to rotate by tracking of solar. This is the initial position of solar panel. After whole day rotation the panel comes to its initial position when night.

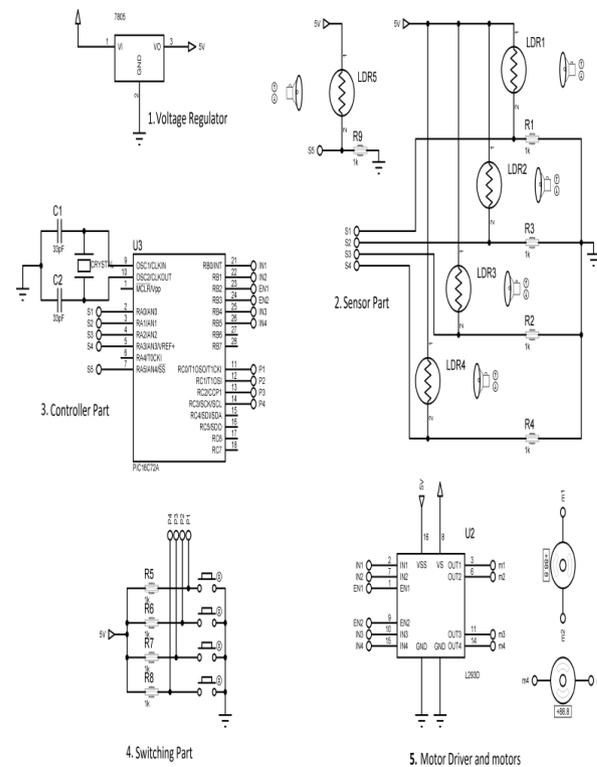


Fig. 4 : Circuit Diagram

The last part No.5 motor driver and motors, Here LM293D is used for drive the two DC 12V gear motor which is drive the rotation of 2.5Kg solar panel

V. ALGORITHM FOR TWO WAYS OF ROTATING OF FREEDOM SOLAR TRACKER SYSTEM

- Start
- Initialize the system.
- Get the sensors (LDRs) analog information.
- Convert the analog information to its corresponding digital value.
- Compare the two pair of sensors digital values by fuzzy logic
- Take decision for motor driver and send motor driver bits.
- Continue the process from c to g by means continue looping.

The corresponding flow chart is given below in figure 5.

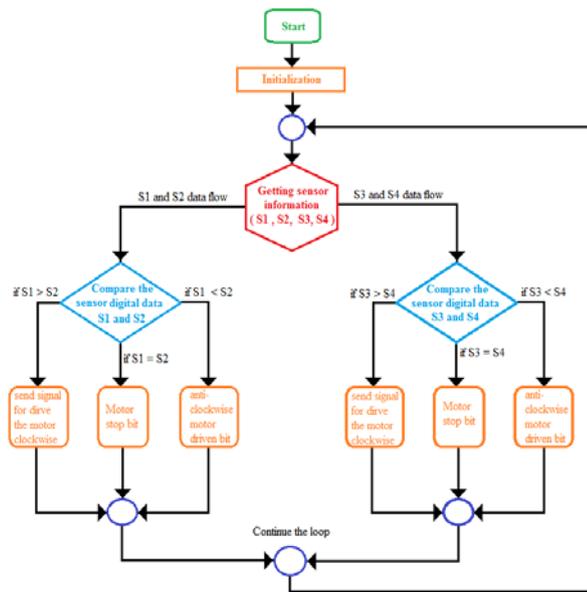


Fig. 5 : Flow chart

Table 2 : Power producing of stationary solar panel and tracking panel.

Time	6	6:30	7	7:30	8	8:30	9	9:30	10
SSP	0	0.5	1	1	2	2.5	4	6	9
SPT-1	0	1	2.5	4	8	12	18	19	19
SST-2	0	0.7	2.1	3.4	7.5	12	17	18.5	19
SST-3	0	0.5	2	3.3	7.3	11	16.5	17.9	18.5
Time	10:30	11	11:30	12	12:30	13	13:30	14	14:30
SSP	12	16	18	19	19	19	18	17	16
TSP-1	19	19	19	19	19	19	19	19	19
TSP-2	19	19	19	19	19	19	19	18	18
TSP-3	19	19	19	19	19	19	19	18	17.7

VI. EXPERIMENTAL RESULT

This experiment applies one solar panel where four solar cells are connected in series-parallel combination to achieve desire set of power. Then we mounted it in the roof of the IUBAT lab building and collect the data keep it on one full day light from 6 AM to 7 PM.

Table 1 : Technical details of solar panel

Brand: Toko BP Solar. Made in China		
Model No.	T-20M	
Watts Peak (W):	P(max)	20W
Short circuit current (A):	(Isc)	1.21A
Open circuit voltage (V):	(Voc)	22.5V
Maximum power current (A):	(Imp)	1.11A
Maximum power voltage (V):	(Vmp)	18V
Dimension of panel	630*290*25mm	
Weight	2.3Kgs	
AM = 1.5 ; Irradiance = 1000W/m ² ; Tc = 25°C		

Time	15	15:30	16	16:30	17	17:30	18	18:30	19
SSP	14	11	10	7	4	2.5	1	0	0
TSP-1	19	19	17	15	11	9	5	2	0
TSP-2	17.5	17	15	10	8.3	3	1.5	1	0
TSP-3	17	17	14	8	7	3	1.5	1	0

SSP = Stationary Solar Panel; TSP = Tracking Solar Panel

After calculation the all data we find that the solar system with tracking capacity give 37% of higher efficiency then its same capacity fixed angle solar system.



Fig. 6 : Practical view solar Tracker by Using ADC of Microcontroller

Simulation view in MATLAB:

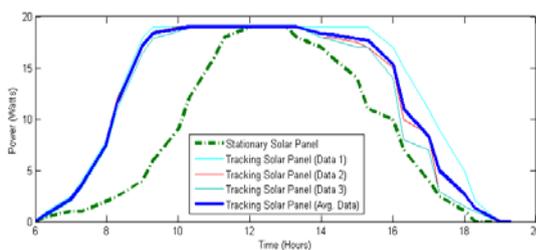


Fig. 7 : Power producing versus time of stationary solar panel and tracking panel.

VII. CONCLUSION

This paper depicts a solar tracking system with two ways of rotating freedom. The tracking controller based ADC of microcontroller. Set up on the solar tracking system, light depended resistors are used to determine the solar light intensity. The designed solar tracking power generation system can track the sun light automatically. Firstly data has been taken from stationary solar panel, and then from trucking solar panel during three different days. The stationary panel

gives total 114.75 W power consumption per day and the average power consumption of tracking panel is 157.86 W per day. From analysis of data we get tracking panel 37 % higher efficiency then stationary panel. Although tracking system is costly than the stationary system but for long time use it will be superior to meet the future energy demand. Experimental work has been carried out carefully. The result shows that higher generating power efficiency is achieved using the solar tracker with two ways of rotational freedom.

REFERENCES RÉFÉRENCES REFERENCIAS

1. M. A. Usta, Ö. Akyazı and İ. H. Altaş "Design and Performance of Solar Tracking System with Fuzzy Logic Controller", 6th International Advanced Technologies Symposium (IATS'11), 16-18 May 2011, Elazığ, Turkey.
2. J. S. Choi, D. Y. Kim, K. T. Park, C. H. Choi and D. H. Chung, "Design of Fuzzy Controller Based on PC for Solar Tracking System", International Conference on Smart Manufacturing Application, April, 9-11, 2008 in KINTEX, Gyeonggi-do, Korea.
3. Dr. J R Mahamood and H Muhammad "Design and implementation of Smart Relay Based Two-axis Sun Tracking System" Iraq J.Electrical and Electronic Engineering Vol.7 No.1, 2011 pp. 64
4. C. Rodriguez, G. A. J. Amaratunga, "Analytic solution to the photovoltaic maximum power point problem", IEEE Transactions On Circuits And Systems, Vol. 54, No. 9, September 2007.
5. J. Ghaisari, M. Habibi, A. Bakhshai, Member, "An MPPT controller design for photovoltaic (PV) systems based on the optimal voltage factor tracking", IEEE Canada Electrical Power Conference, 2007.
6. R. Gules, J. De Pellegrin Pacheco, H. Leães Hey, J. Imhoff, "A maximum power point tracking system with parallel connection for PV stand-alone applications", IEEE Transactions On Industrial Electronics, Vol. 55, No. 7, July 2008.
7. Fangrui Liu, S. Duan, Fei Liu, B.Liu, Y. Kang, "A variable step size inc MPPT method for PV systems", IEEE Transactions On Industrial Electronics, Vol. 55, No. 7, July 2008.
8. A. Pandey, N. Dasgupta, A. K. Mukerjee, "A simple single-sensor MPPT solution", IEEE Transactions On Power Electronics, Vol. 22, No. 2, March 2007.

9. R. Mukaro, X.F. Carelse, A microcontroller-based data acquisition system for solar radiation and environmental monitoring”, IEEE Transaction On Instrumentation And Measurement, Vol. 48, No. 6, December 1999.
10. E. Koutroulis, K. Kalaitzakis, N. C. Voulgaris, “Development of a microcontroller-based, photovoltaic maximum power point tracking control system”, IEEE Transactions On Power Electronics, Vol. 16, No. 1, January 2001.
11. M.A. Abella, E. Lorenzo, F. Chenlo, “Effective irradiance estimation for PV applications”, 3rd World Conference On Photovoltaic Energy Conversion, May 11-18, 2003 Osaka, Japan.
12. Z. Xinhong, W. Zongxian and Y. Zhengda, “Intelligent Solar Tracking Control System Implemented on a FPGA”, Institute of Electrical Engineering, Yuan Ze University.
13. A. Louchene, A. Benmakhlouf and A. Chaghi, “Solar Tracking System with Fuzzy Reasoning Applied to Crisp Sets”, Revue des Energies Renouvelables, Vol. 10, N°2, pp. 231 – 240, 2007.
14. Gustavo Ozuna, Carlos Anaya. Diana Figueroa. Nun Pitalua, “Solar Tracker of Two Degrees of Freedom for Photovoltaic Solar Cell Using Fuzzy Logic”, Proceedings of the World Congress on Engineering 2011 Vol II WCE 2011, July 6 - 8, 2011, London, U.K.
15. Microchip, “PIC16F72 Datasheet”, <http://www.microchip.com>