



GLOBAL JOURNAL OF RESEARCHES IN ENGINEERING  
ELECTRICAL AND ELECTRONICS ENGINEERING  
Volume 13 Issue 10 Version 1.0 Year 2013  
Type: Double Blind Peer Reviewed International Research Journal  
Publisher: Global Journals Inc. (USA)  
Online ISSN: 2249-4596 & Print ISSN: 0975-5861

## Towards High Efficiency Solar Cells: Composite Metamaterials

By Galib Hashmi, Masudul Haider Imtiaz & Shahida Rafique

*University of Dhaka, Bangladesh*

**Abstract** - Classification & Applicability of various metamaterials found to be promising in designing high efficiency solar cells. Also light absorption & polarization of electromagnetic energy have been found very prominent in case of metamaterials. Theoretical modeling of metamaterial solar cell has been developed in this study to achieve high efficiency. Hence, composite metamaterials have been investigated and metamaterial property like negative refractive index has been thoroughly studied. It has been found that if anti-reflective coating of solar cell is made of metamaterial, and its refractive index is 1 then no reflection occurs and the efficiency increases without any polarization effect. Also it has been realized that by using sawtooth structure in the second layer of metamaterial solar cell, the band gap can be tuned thus covering the whole solar spectrum and increasing efficiency. The simulation of the proposed model has been done utilizing PC1D, Wx AMPS and Matlab. Metamaterial solar cell shows promising future and this research work can be successfully used to design & develop metamaterial based highly efficient solar cells.

**Keywords** : *anti-reflective coating, metamaterial, refractive index, solar cell.*

**GJRE-F Classification** : *FOR Code: 090605*



*Strictly as per the compliance and regulations of :*



# Towards High Efficiency Solar Cells: Composite Metamaterials

Galib Hashmi<sup>α</sup>, Masudul Haider Imtiaz<sup>σ</sup> & Shahida Rafique<sup>ρ</sup>

**Abstract** - Classification & Applicability of various metamaterials found to be promising in designing high efficiency solar cells. Also light absorption & polarization of electromagnetic energy have been found very prominent in case of metamaterials. Theoretical modeling of metamaterial solar cell has been developed in this study to achieve high efficiency. Hence, composite metamaterials have been investigated and metamaterial property like negative refractive index has been thoroughly studied. It has been found that if anti-reflective coating of solar cell is made of metamaterial, and its refractive index is 1 then no reflection occurs and the efficiency increases without any polarization effect. Also it has been realized that by using sawtooth structure in the second layer of metamaterial solar cell, the band gap can be tuned thus covering the whole solar spectrum and increasing efficiency. The simulation of the proposed model has been done utilizing PC1D, Wx AMPS and Matlab. Metamaterial solar cell shows promising future and this research work can be successfully used to design & develop metamaterial based highly efficient solar cells.

**Keywords** : anti-reflective coating, metamaterial, refractive index, solar cell.

## I. INTRODUCTION

Providing enough energy to meet an ever-increasing demand is one of the greatest problems the world is now facing. Energy is the key to an industrialized economy, which calls for a doubling of electrical output every ten to twelve years. Meanwhile, the days of cheap abundant and environmentally acceptable power may be coming to an end. Coal is plentiful but polluting, natural gas is scarce and oil is not found everywhere. Nuclear power now is costly and risky. In many countries of the world, keen interest is being shown in alternative energy sources. A promising source of energy which would be able to solve a part of the energy crisis for the present & future, by instructively looking at the current technical and economic energy picture as well as sustainable energy is solar cell. But on an average single p-n junction solar cell efficiency is not more than 20% [1] as it cannot use the whole solar spectrum. Making a highly efficient solar cell is always a challenging task for today's scientists and engineers. [2] A lot of research works have been carried on and quite a few approaches have found efficient like: (1) To select the semiconductor materials

with appropriate energy gaps to match the solar spectrum optimizing their optical, electrical, and structural properties; and (2) the innovative device engineering which enables more effective charge collection as well as better utilization of the solar spectrum through single and multi-junction approaches. However, both approaches haven't confirmed the utilization of entire spectrum of sunlight simultaneously, from the infrared to the ultraviolet and hence limit the efficiency of the solar cell.

Metamaterials might have a huge impact in this regard. These are artificial materials engineered to have properties that may not be found in nature which would be advantageous to utilize whole solar spectrum. Also, metamaterial is insensitive to polarization which can be used to precisely control the path of visible light regardless of the polarization of the light. Responding these motivations authors were intended to propose a new innovative approach to integrate metamaterials as anti-reflection coating with traditional p-n junctions. The design parameters of metamaterial based solar cell are conventional semiconductor parameters, emitter & base, grid pattern, anti-reflective coating, doping, band gap, carrier concentration, diffusion coefficients, diffusion length, air mass etc. Simulation results also support the whole design in terms of efficiencies and usability.

## II. BACKGROUND STUDY

### a) Basics of Solar Cells

A solar cell (also called a photovoltaic cell) is an electrical device that converts the energy of light directly into electricity by the photovoltaic effect. Photovoltaic effect is the production of current due to the voltage difference across a p-n junction, as a result of the absorption of photons on the top layer of n-type material. This N-type material is often made of a shiny reflective material so it may send photons bouncing

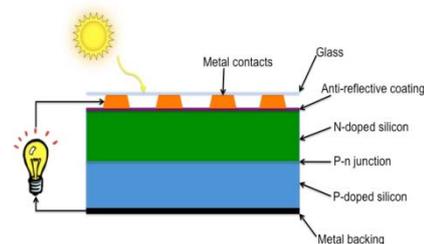


Figure 1 : Basic structure of a silicon solar cell. [3]

Authors <sup>α</sup> <sup>σ</sup> : Dept. of Applied Physics Electronics & Communication Engineering University of Dhaka, Bangladesh.  
E-mails : galib\_90@yahoo.com, masudul4145@gmail.com

away before they enter into the p-n junction; which is undesirable, so an anti-reflective coating is often applied to reduce those losses, to limit the reflection of sunlight. There are also finger like contacts in top layer to reduce series resistance. While the P-type material is layered to a conductive back contact made of aluminum or some alloy. These metal contacts and the fingers on the top electrode are constructed to facilitate ample sunlight to enter into the n- and p-type layer and also a pathway for electrical flow out of current. Figure 1 shows the basic structure of solar cell.

### b) Limitations of the Solar Cells

Even the best of today's silicon solar cells cannot use about 30 percent of the light from the sun: that's because the entire spectrum of sunlight, from infrared to ultraviolet, covers a range of about 0.0012 eV to about 4 eV, the semiconductors do not respond to the entire spectrum of sunlight. Solar cell works only in the visible spectrum. Photons with at least the band gap energy will be able to free electrons to create a current. Photons with energy less than material's band gap pass through the cell and are not absorbed, which wastes incoming energy. Also some sunlight is always reflected off the surface of the cell even though the surface is usually texturized and coated with an anti-reflective coating. Furthermore, some energy is lost from local recombination of newly created holes and electrons. Finally, there are some losses due to manufacturing impurities in the solar cell.

### c) Concepts of MetaMaterials

In recent years, there has been much interest in the development of artificial electro-magnetic structures called "metamaterials" which can yield values for permittivity  $\epsilon$  and permeability  $\mu$  not achievable in nature. Metamaterials usually gain their properties from structure rather than the composition, using small inhomogeneities to create effective macroscopic behavior. Metamaterials can be classified according to the response in the presence of Electromagnetic field, broadly on the macroscopic parameters  $\epsilon$  and  $\mu$  of these materials. The classification is graphically illustrated in Figure 2 which indicates positive refractive index metamaterials are only in the first quadrant, all the other quadrants are of negative refractive index metamaterials. Most dielectrics are included in the DPS, Double Positive group ( $\epsilon > 0, \mu > 0$ ). In certain frequency regimes, many plasmas and gyrotropic material respectively exhibit the characteristics of ENG, Epsilon Negative ( $\epsilon < 0, \mu > 0$ ) and MNG, Mu Negative ( $\epsilon > 0, \mu < 0$ ) group. A medium with both permittivity & permeability less than zero ( $\epsilon < 0, \mu < 0$ ) are called as Double negative (DNG) or Left Handed medium(LHM). These DNG/LHM materials have only been demonstrated with artificial constructs. As light propagation must occur through metamaterial solar cell,

double negative refractive index metamaterial (i.e. LHM) is rationally proposed in this study.

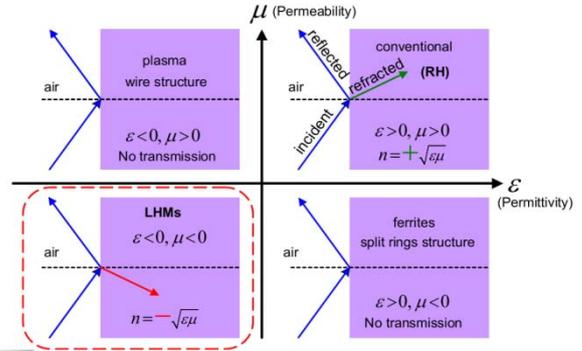


Figure 2 : Classification of different metamaterials

### d) Applicability of Metamaterial on Solar Cells

#### i. Metamaterials of Sawtooth Structure

According to Nicholas X. Fang, the Brit (1961) and Alex (1949) d'Arbeloff, Associate Professor of the Department of Mechanical Engineering, MIT, the thinnest materials used to fully capture light are limited to a very narrow range of wavelengths and the angles of incidence. They proposed a design composed of a pattern of wedge-shaped ridges whose widths are precisely tuned to slow and capture light of a wide range of wavelengths and the angles of incidence. These metamaterials could be made extremely thin, saving weight and cost. Also, Kin Hung Fung, an MIT postdoc has proposed a design of multilayer sawtooth structure to absorb a wide range of frequencies with an efficiency of more than 95 percent [4].

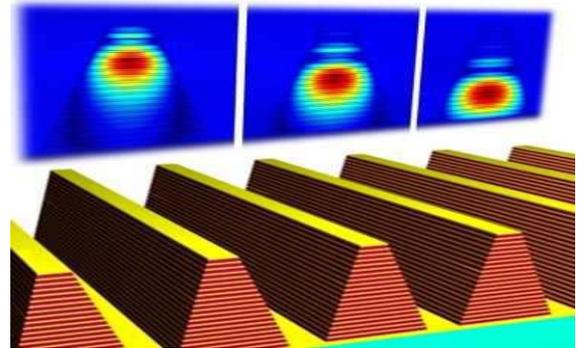


Figure 3 : Sawtooth Tapered ridges, made from alternating layers of metal and insulating material deposited on a surface, can produce a metamaterial that is tuned to a range of specific frequencies of light. Light of different wavelengths is absorbed by the material at different levels, where the light's wavelength matches the width of the ridges. Designed in MIT's Department of Mechanical Engineering

In the case of a general solar cell we get only one band gap and only a portion of visible light can be absorbed by solar cell. Using sawtooth structure in

metamaterial band gap can be tuned. Figure 4 shows the general Band gap vs refractive index curve of this equation

$$n = \sqrt{1 + \{A / (E_g + B)^2\}}$$

Where A is hydrogen ionization energy  $\approx 13.6$  eV, B is 3.47 eV and n is the refractive index. The curve is continuous, leads to the efficient utilization of solar cell by utilizing metamaterial grooves (sawtooth) structure.

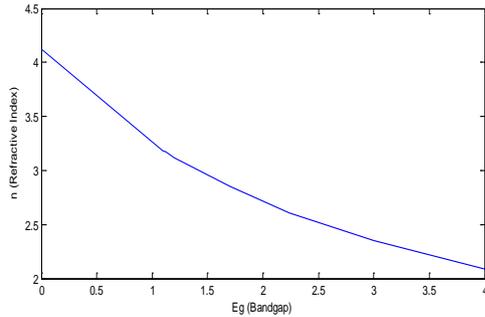


Figure 4 : Typical band gap vs refractive index Curve

ii. Polarization and Absorption Effect

L. Huang and H. Chen, the Electromagnetics Academy at Zhejiang University, have shown that the metamaterial absorber is almost insensitive to the polarizations of the incident wave due to the symmetric pattern of the closed rings [5]. Figure 5 shows the performance of the metamaterial absorber for different polarizations of the incident wave. It is found that, refractive index  $\mu$  change from  $0 \pm$  to  $40 \pm$  (the measurement for  $\mu$  from  $50 \pm$  to  $90 \pm$  is same to that from  $0 \pm$  to  $40 \pm$  due to the rotational symmetric of the closed rings), the absorption frequency only shift 0.8% and the absorptions are all lower than 15 dB, reflecting the insensitiveness of the metamaterial absorber to the wave polarizations. Because metamaterial has no polarization effect, by using metamaterial in solar cell, efficiency has to increase.

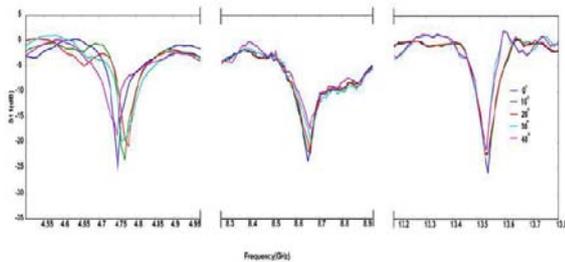


Figure 5 : Measured reflection coefficients of the metamaterial absorber for different polarizations of the incident wave. [Photo courtesy: The Electromagnetics Academy at Zhejiang University]

Also Yang liu, Yitung chen, Jichun li, UNLV Center for Energy Research have shown that absorption due to silicon nitride (SiN) metamaterial is higher the than normal material. (Figure 6-7 shows the parametric study and the data comparison with other materials.) So

metamaterial solar cell absorption capability would be higher and the efficiency would be bound to increase.

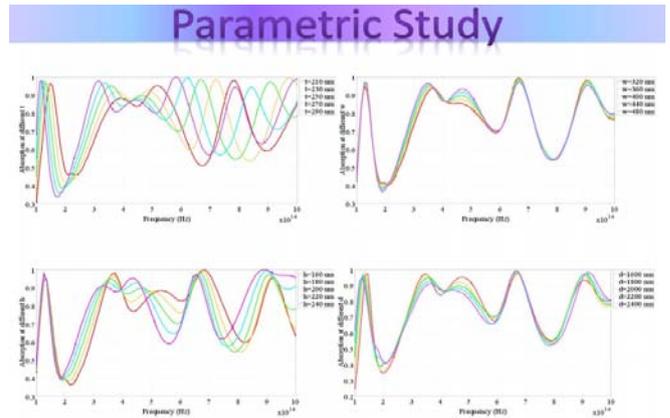


Figure 6 : Photo Courtesy, UNLV Center for Energy Research

Absorption in Visible Region%	SiN	Si	a-Si	Poly-Si
Au	82.35	58.03	58.53	58.64
Cu	81.97	54.78	56.07	56.33
Ni	<b>84.29</b>	65.52	67.90	68.22
W	84.28	62.51	64.92	65.01

Absorption over Solar Spectrum%	SiN	Si	a-Si	Poly-Si
Au	74.92	53.76	48.37	47.05
Cu	74.47	45.35	46.09	44.82
Ni	<b>77.18</b>	56.51	56.70	56.01
W	76.85	53.53	54.08	53.02

Figure 7 : Data Courtesy, UNLV Center for Energy Research

e) Proposed Solar Cell Model

Figure 8 shows the schematic of the proposed multi-junction solar cell with an anti-reflecting coating followed by a layer of metamaterial of saw tooth structure. The anti-reflective coating is also made of the metamaterial with refractive index 1 equivalent to the air refractive index. As the shiny n type layer may send photons bouncing away before they've done their job, an anti-reflective coating is applied to reduce those losses. And because of refractive index is one, the anti-reflective coating would be transparent to the incoming light; no reflection would carried out to decrease the efficiency. Also anti-reflective coating on glass cover would prevent solar cell from temperature variation, dust and other natural disturbance.

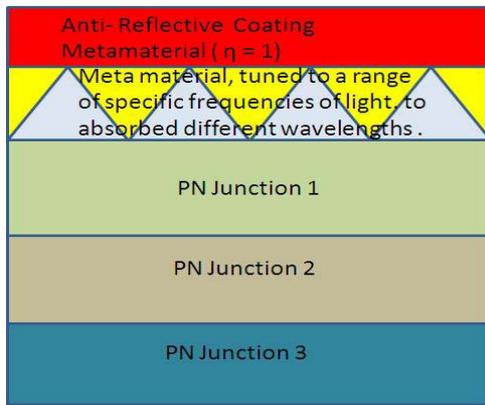


Figure 8 : Proposed metamaterial solar cell, where P-N junction can be normal or composite metamaterial

The second layer is made of the metamaterial of sawtooth structure. Each sawtooth has a different negative refractive index. As the band gap and refractive index are inversely proportional to each other, thus tuning the refractive index, any band gap can be achieved. Thus the whole solar spectrum -0.5 to 2.9 or 0 to 4 eV can be achieved by this sawtooth structure. Solar ray incident on the multilayer cell and get absorbed. The PN junction layers followed by sawtooth layer could be normal P-N junction layers or metamaterial PN junction layers. Metamaterial PN junction layer would make the solar cell more efficient but it might be costly. The normal PN junction layers could be used in those cases.

#### f) Design Parameter of Metamaterial Solar Cell

For an efficient solar cell design, the technical standards should be met and must to satisfy the design parameters. The central semiconductor parameters that determine the performance of a solar cell are:

- i) Concentrations of doping atoms:  $N_D$  and  $N_A$  - the concentration of donor & acceptor atoms respectively. These concentrations determine the width of a space-charge region of a junction.
- ii) Mobility ( $\mu$ ) and diffusion coefficient ( $D$ ) of charge carriers that characterize the carriers' transport due to drift and diffusion respectively. Typical electron and hole mobility for Si at room temperature (300°K) is respectively  $1400 \text{ cm}^2/(\text{V}\cdot\text{s})$  and  $450 \text{ cm}^2/(\text{V}\cdot\text{s})$ .
- iii) Lifetime,  $\tau$ , and diffusion length,  $L$ , of the excess carriers that characterize the recombination-generation processes.
- iv) Band gap energy,  $E_G$ , absorption coefficient,  $\alpha$ , and refractive index,  $n$ , that characterize the ability of a semiconductor to absorb visible and other radiation.
- v) The name *Emitter & Base* is used in the software approach instead of typical P & N type. If we use 300 micrometer p, n should be 1-2 micrometer. The ratio is very much similar in nanometer range. But if nanometer range considered, then surface energy effect must be taken into consideration.

- vi) All available states in the conduction and valence band can be represented by an effective density of states  $N_C$  and an effective density of states  $N_V$  respectively. The range of  $N_C$  is around  $1 \times 10^{18}$  to  $4 \times 10^{18}$  and range of  $N_V$  is around  $4 \times 10^{18}$  to  $8 \times 10^{18}$ .
- vii) The Air Mass (AM) quantifies the reduction in the power of light as it passes through the air and dust. The solar industry uses AM-1.5 for all standardized testing of terrestrial solar panels, so AM-1.5 is used in case of metamaterial solar cell. Figure 9 shows the solar radiation spectrum of different air mass.

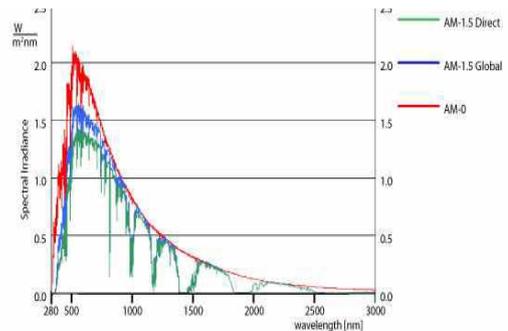


Figure 9 : Solar radiation spectrum of different air mass

#### g) Simulation and Analysis

In this work, PC1D (Photovoltaic cell 1 dimension) & WxAMPX (Analysis of microelectronic & photonic structure, Wx - widget provided) softwares were used to simulate the whole process. PC1D was used to check the impacts of the layer wise refraction index variations with the changing of layer wide in nano scale change. Figure 10 shows the screenshot of the *Reflectance* changing option of PC1D software. Current I or Power P vs Voltage V curves found from PC1D are shown in the figure-11 and the numerical results also are in Table-1.

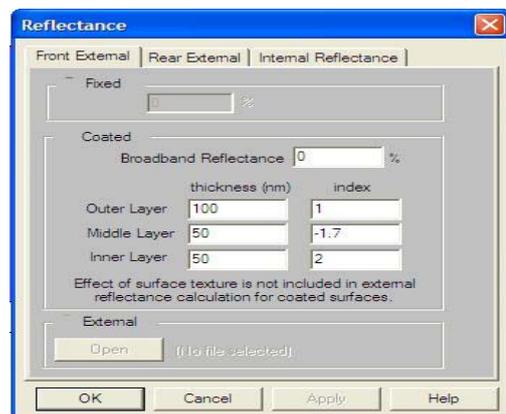


Figure 10 : Refractive index change in PC1D

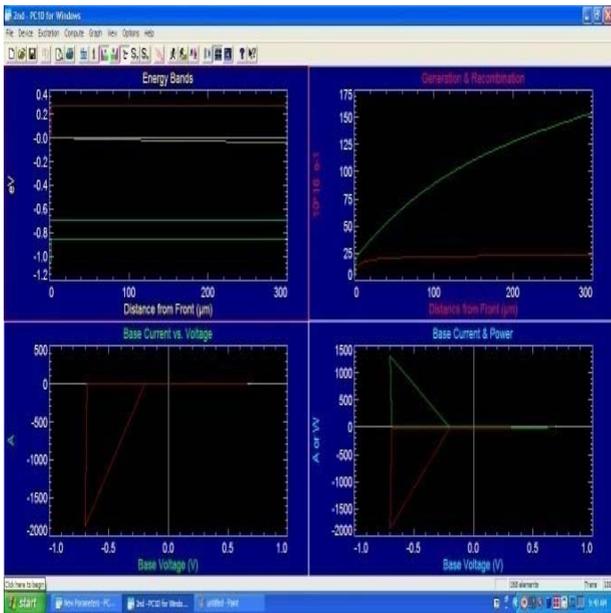


Figure 11 : Projected all graphs (Energy band, Generation & Recombination, Base Current vs. Voltage, Base Current & Power) at a glance

Table 1 : Showing Refractive index of different layers and corresponding  $I_{sc}$ ,  $V_{oc}$  and Max power

Refractive Index			$I_{sc}$ (amp)	$V_{oc}$ (volts)	Max. Power (watts)
Outer layer	Middle layer	Inner layer			
1	-2	3	-3.17	0.6455	1.711
1	-2	4	-2.921	0.6437	1.571
1	-1.5	-2	-3.281	0.6462	1.774
-2	3	3	-3.155	0.6454	1.703
1	2	-2	Transient Convergence Failure		
-1	-2	3	Transient Convergence Failure		
-1	-1.1	2	-3.095	0.645	1.669
1	-1.8	-2	-3.323	0.6469	1.746
1	-1.7	2	-3.269	0.6461	1.767
2	-1.7	2	-2.555	0.6396	1.366
3	-1.7	2	-2.154	0.635	1.143

Impact of the anti-reflecting coating refractive index change in  $I_{sc}$ ,  $V_{oc}$  and Max Power can be found by considering the last 3 data of the table 1, where only the anti-reflecting coating refractive index column has the different values. Band gap 3.5 with refractive index is 2.21 is often used as anti-reflective coating of anormal solar cell. So assuming that refractive index is 2 for a normal solar cell a comparison has been made. If the anti-reflective coating has refractive index 1 instead of 2.21,

Current Increased:  $[(3.269-2.555)/2.555] * 100 = 27.945\%$

Voltage Increased:  $[(0.6461-0.6396)/0.6396] * 100 = 1.016\%$

Efficiency Increased:  $[(1.767-1.366)/1.366] * 100 = 29.356\%$

If the anti-reflective coatings refractive index was chosen 3 instead of 2 then the metamaterial solar cell efficiency would be decreased by  $[(1.366-1.143)/1.366] * 100 = 16.325\%$ .

So, refractive index 1 is the best choice for anti-reflective coatings. Efficiency would increase to 30% and 60% for choosing refractive index 1 over 2 and 3 respectively.

Also the efficiency would show better results if there is tuned multilayer metamaterial architecture and no

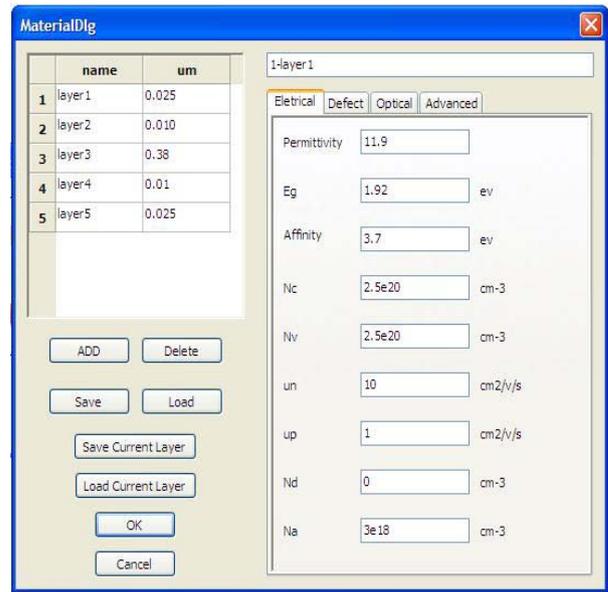


Figure 12 : Dialog box for material configuration in WxAMPS

polarization effect. As it is not possible to have visualization of the constituent layers, WxAMPS simulator was used to visually investigate the layer architecture to configure layer parameter individually. Figure-12 shows a sample layer parameter configuration option in WxAMPS.

WxAMPS follows the Maxwell's equations that the refractive index,  $n = \epsilon_r^{1/2} \eta_r^{1/2}$ . As the relative permittivity for optical frequencies is considered 1 [ $\eta_r^{1/2} = 1$ ], the equation becomes,  $n = \epsilon_r^{1/2}$

Here a solar cell is also simulated with CdS (cadmium sulfide - n type), CdTe (cadmium telluride - p type) with metamaterial Tin oxide ( $SrO_2$ ) layer (with refractive index =1). It is found that the efficiency is

**13.0968%** (From the I–V characteristics curve shown in Figure 13) whereas in normal solar cell efficiency is 7%. So we can notice a definite increase of efficiency in the metamaterial solar cell.

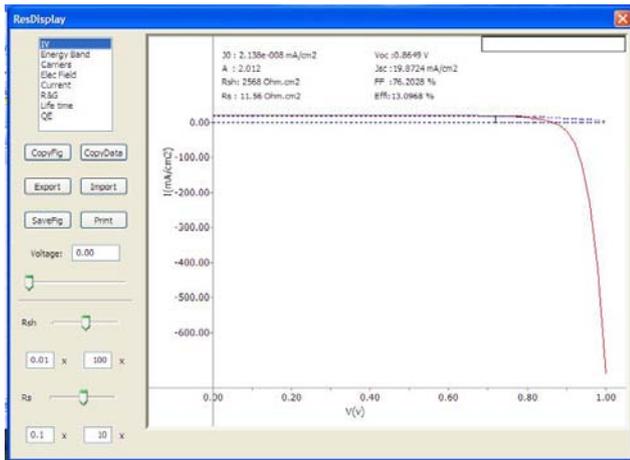


Figure 13 : Cds – CdTe metamaterial solar cell I-V curve

#### h) Limitations and Future Work

As there has been a very little work on metamaterial solar cell research, the main emphasis of this work was to demonstration theoretically whether metamaterial on solar cell would increase the overall efficiency or not. Also, most thin materials used to capture sunlight are limited to a very narrow range of wavelengths and the angles of incidence. The proposed design uses a pattern of wedge-shaped ridges whose widths are precisely tuned to slow variation and thus made enable to capture light of a wide range of wavelengths and angles of incidence. Because of using metamaterial, there is no polarization effect of unpolarized sunlight, thus the efficiency has increased manifold.

Some difficulties had been faced during this study. The first and foremost is that there was no open source reference software that could be used for designing metamaterial solar cell. Also there was not any complete metamaterial solar cell model to compare; also the lack of physical implementation in the third world country likes Bangladesh. Despite of all the difficulties, proposed metamaterial model shows promising feature for achieving high efficiency solar cell; hopefully this work would be beneficial to the scientists and engineers.

### III. CONCLUSION

A theoretical model of metamaterial solar cell is developed, simulated and discussed above. It was found that if the anti-reflective coating of solar cell is made with metamaterial and its refractive index is made 1 then efficiency of the metamaterial solar cell is maximum. Furthermore, sawtooth structure, polarization

effect and metamaterial absorption are taken into consideration. And it can be concluded that metamaterial solar cell is highly efficient. Time has come to look forward and work in these fields to produce highly efficient solar cells rather than depending wholly on conventional method because metamaterial solar cell shows promising future in solving world's power crisis problem.

### REFERENCES RÉFÉRENCES REFERENCIAS

1. Martin A. Green, Keith Emery, Yoshihiro Hishikawa, Wilhelm Warta and Ewan D. Dunlop, Solar cell efficiency tables (version 39), Published online in Wiley Online Library (wileyonlinelibrary.com). DOI: 10.1002/pip.2163.
2. Satyen K. Deb, Recent developments in high-efficiency pv cells, National Renewable Energy Laboratory.
3. P. J. Reddy, Science and Technology of Photovoltaics, 2nd edition, CRC Press, Leiden (2010).
4. <http://web.mit.edu/newsoffice/2012/metamaterial-absorbs-light-0309.html>.
5. Yang Liu, Yitung Chen and Jichun Li, Solar cell design using metamaterials, UNLV Center for Energy Research.
6. Soteris A. Kalogirou, Solar Energy Engineering Processes and Systems, Academic Press, Elsevier - 2009 edition.
7. Yanxia Cui, Kin Hung Fung, Jun Xu, Hyungjin Ma, Yi Jin, Sailing He, and Nicholas X. Fang, Ultra-broadband Light Absorption by a Sawtooth Anisotropic Metamaterial Slab, Nano Letters.
8. Thomas Henry Hand, Design and Applications of Frequency Tunable and Reconfigurable Metamaterials, Phd thesis, Department of Electrical and Computer Engineering Duke University.
9. Umit cotuk, Scattering from multi-layered metamaterials using wave matrices, master's thesis, naval postgraduate school.
10. Shridhar E. Mendhe & Yogeshwar Prasad Kosta, Metamaterial properties and applications, international Journal of Information Technology and Knowledge Management January-June 2011, Volume 4, No. 1, pp. 85-89.
11. Victor Veselago, Leonid Braginsky, Valery Shklover, and Christian Hafner, Negative Refractive Index Materials, Journal of Computational and Theoretical Nanoscience Vol.3, 1–30, 2006.
12. S. Fonash, "A Manual for AMPS-1D for Windows 95/NT", The Pennsylvania State University, 1997.